


LEGEND	
EXISTING	PROPOSED
100	100
D	D
W	W
E	E
G	G
S	S
H	H
SMH	SMH
DMH	DMH
V	V
C	C
429.5	429.5
HP	HP
SCB	SCB
LP	LP
T	T
UP	UP
PIV	PIV
TD	TD

NOTES:
 1. PAVEMENT INTERIOR TO THE WORK AREA TO BE REMOVED WITH REGRADING AND REPLACED AS NECESSARY, AN ADDITIONAL PLAN WILL BE PREPARED UPON APPROVAL FOR EXACT AREAS OR REPLACEMENT AND AREAS OF OVERCOAT.

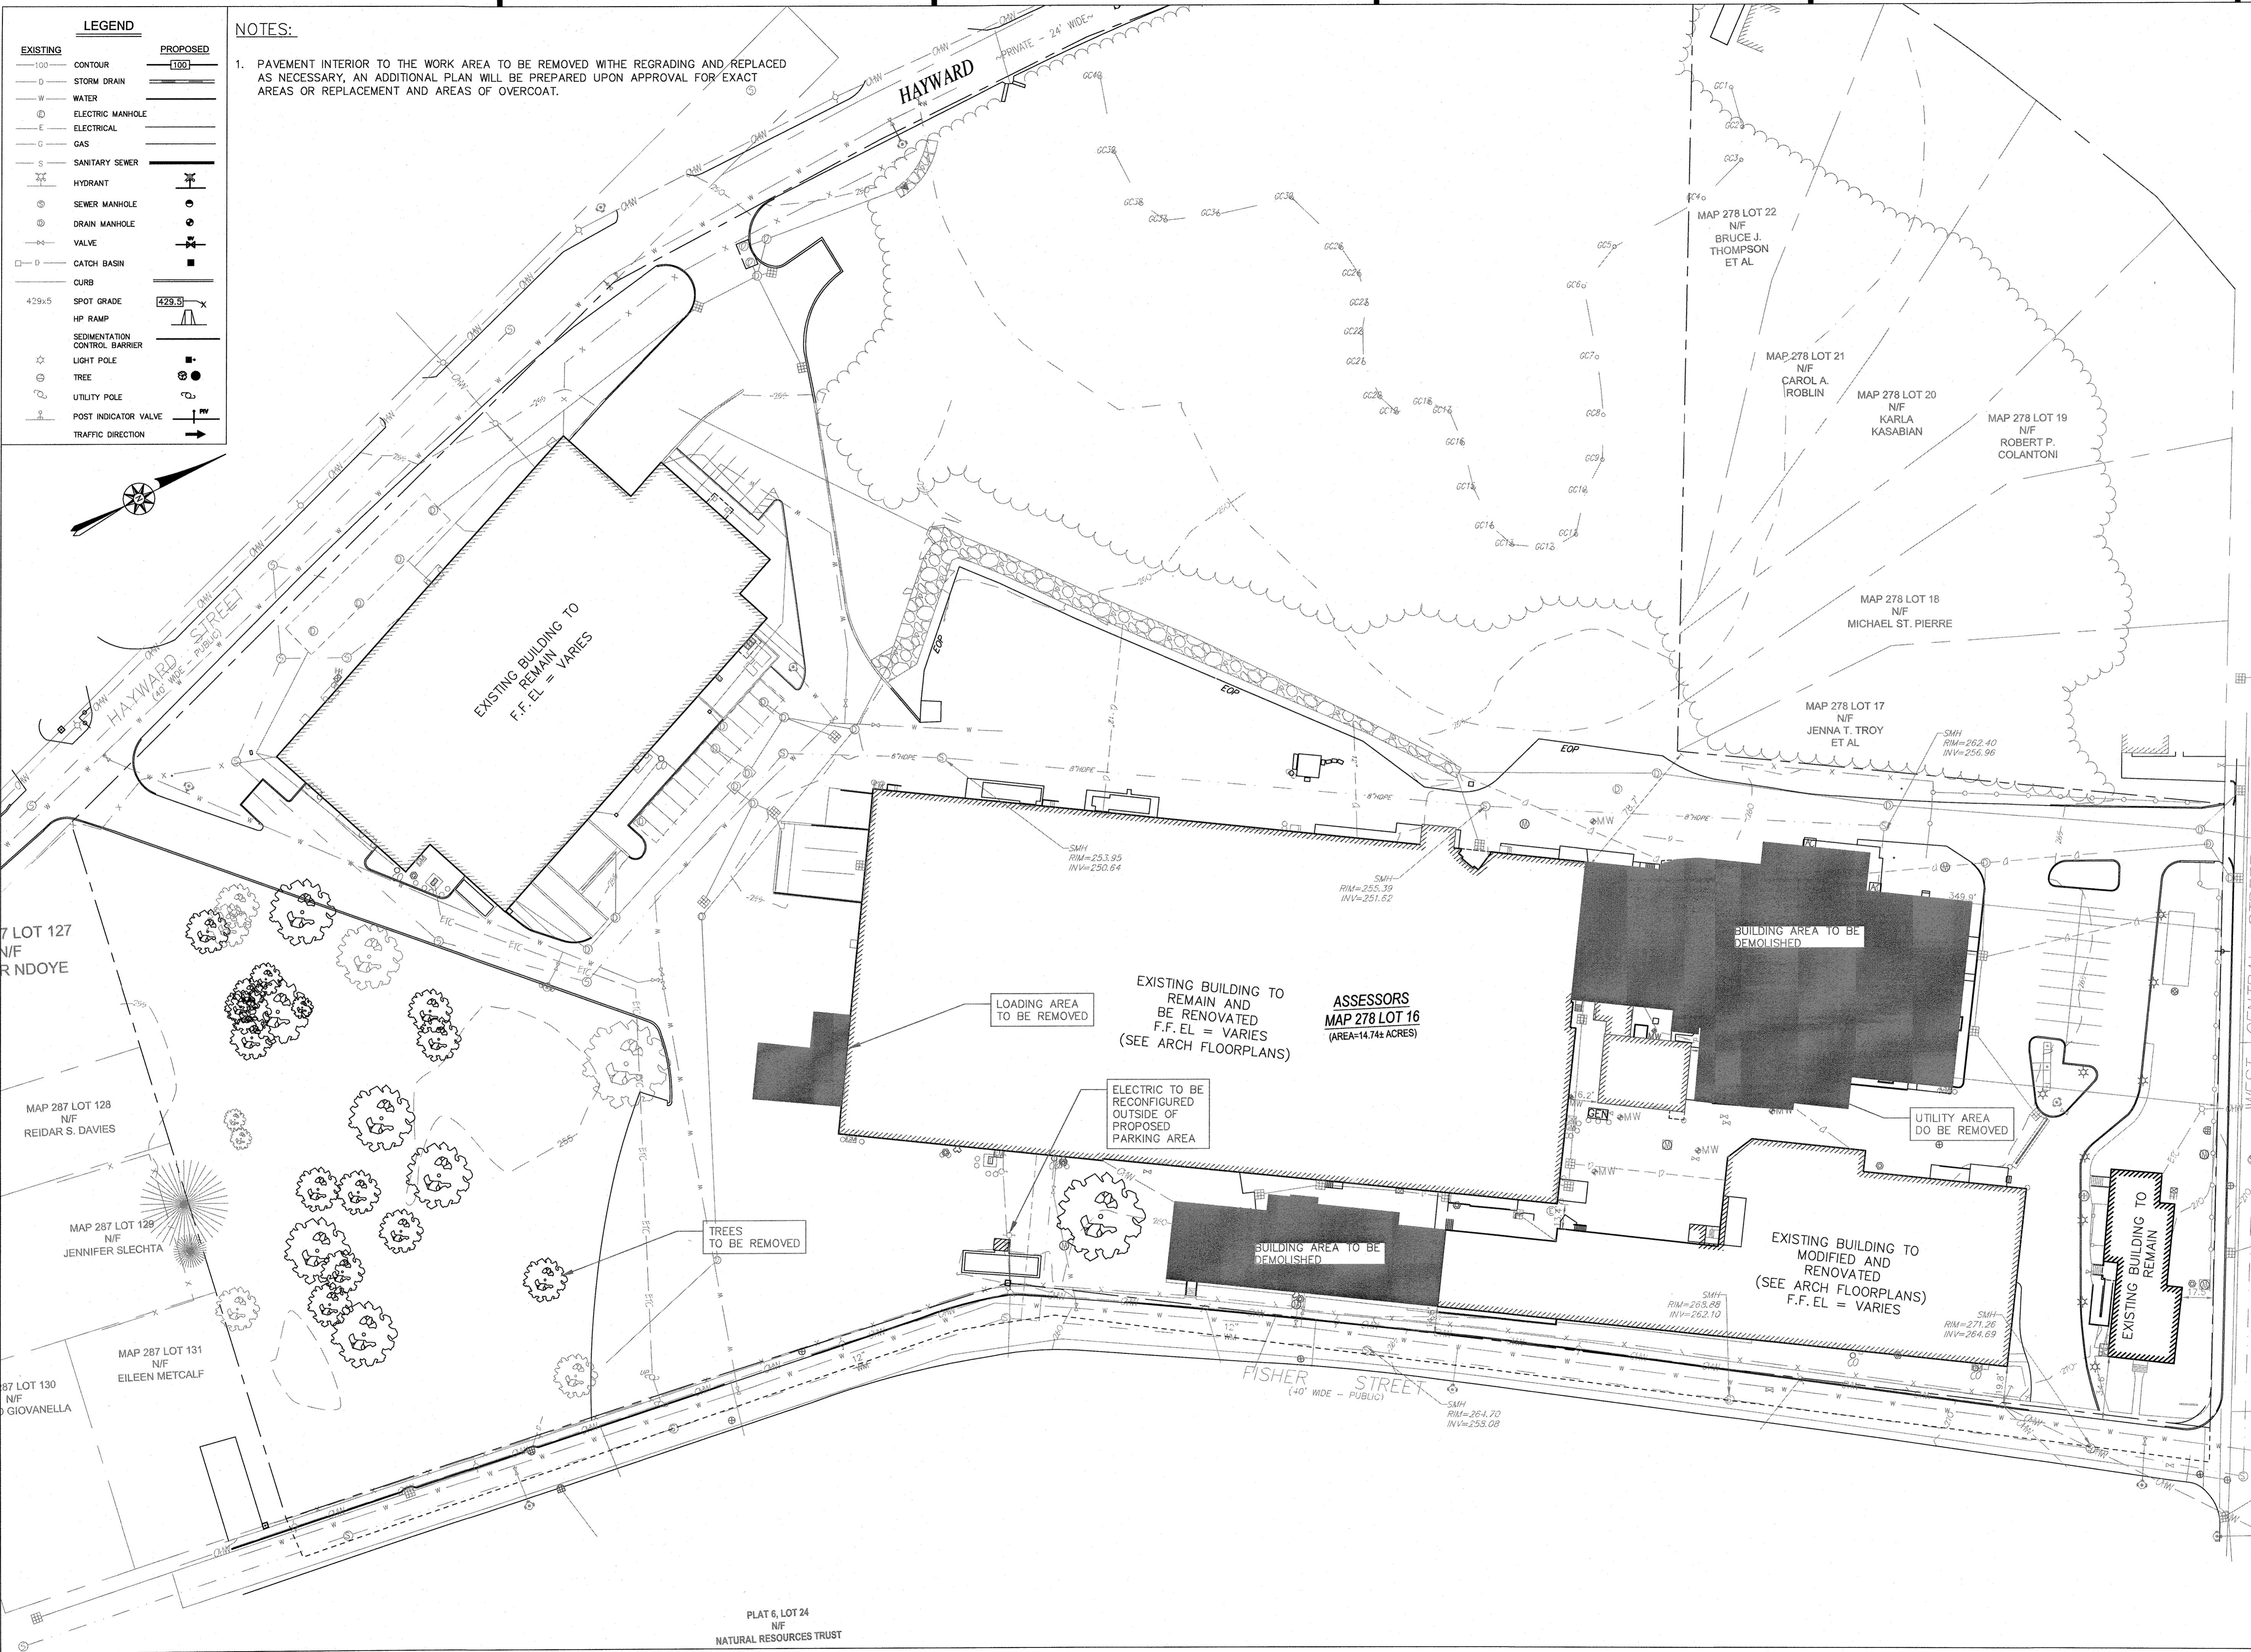

Not For Construction

WARNING: See The Architect, Inc., all drawings and written material herein constitute the original and unpublished work of the architect, and the same may not be duplicated, used, or disclosed without the written consent of the architect. Contractors to use Architectural drawings to get out. Contractors to check and verify all Dimensions on the plan to Construction/Fabrication. Figure Dimensions take precedence over Scaled Dimensions. Any discrepancies should be immediately reported to the Architect. The project manager shall be notified in writing of any discrepancies prior to proceeding with the work. The scale of drawings may change when copied or used. All work to comply with I.B.C. Regulations and relevant American Standards.
 © 2019 - all rights reserved

consultant / contractor information:

LEVEL
 DESIGN GROUP
 CIVIL ENGINEERING / LAND SURVEYING
 249 SOUTH STREET
 UNIT 1
 PLAINVILLE, MA 02762
 TEL. (508) 695-2211 FAX. (508) 695-2219

stamp:

 9/15/21

revision	revision description	date
1	COMMENT RESPONSE	9-15-2021

project title:
FACTORY SQUARE FRANKLIN
 5 FISHER STREET, FRANKLIN, MA 02038
 client information:
 K FISHER STREET LLC
 1 FISHER STREET, FRANKLIN, MA 02038

J t A
JOE THE ARCHITECT
 343 Medford Street, Suite 4C Somerville, MA 02145
 t: +1(617) 764-3593 e: askjoe@joethearchitect.com
 www.joethearchitect.com

project number	drawing scale	approver
1899.00	1" = 40'	
drawing number	revision	
C-1.1		

LEGEND	
EXISTING	PROPOSED
100	100
D	D
W	W
E	E
G	G
S	S
H	H
SM	SM
DM	DM
V	V
CB	CB
429x5	428.5
HP	HP
SB	SB
L	L
T	T
UP	UP
PIV	PIV
TD	TD

ZONING BY-LAW REQUIREMENTS		
ZONING DISTRICT: MIXED BUSINESS INNOVATION		
USE: MULTI-USE REDEVELOPMENT		
	REQUIRED	EXISTING/PROPOSED
MIN. LOT AREA	40,000	642,044
MIN. LOT FRONTAGE	175'	17.5'
FRONT YARD SETBACK	40'	17.5'
SIDE YARD SETBACK	30'	14.8'
REAR YARD SETBACK	30'	297.2'
MAX. BLDG/LOT COVERAGE BLDG	70%	26.1% / 21.8%
MAX. BLDG/LOT COVERAGE IMP.	80%	53.9% / 50.2%
MAX. BUILDING HEIGHT	40'	<40'

PARKING REQUIREMENTS*		
USE: INDUSTRIAL (45,670± S.F.)	REQUIRED	PROVIDED
1 SPACE / 400 S.F.	114.11	000
USE: RETAIL/MD/LEG OFFICE (24,830± S.F.)	124.15	
1 SPACE / 200 S.F.		
USE: OFFICE (OTHER) (2,570± S.F.)	10.28	007
1 SPACE / 250 S.F.		
USE: REST./THEATER/ASSEM (12,580± OR 245)	98	
1 SP / 60 S.F. OR 1SP / 2.5 SEATS		
USE: WAREHOUSE (27,085± S.F.)	27.08	000
1 SPACE / 1,000 S.F.		
USE: MFG/IND AREA (18,075 S.F.)	12	
1 SP / 100 S.F. OR 1SP PER EMP. APPROVED		
USE: WAREHOUSE (18,075± S.F.)	12	
1 SPACE / 1,000 S.F. OR 1SP/EMP (APPROVED)		
REGULAR SPACES	398	376
HANDICAP SPACES	8	9
TOTAL SPACES	406	385


- NOTES:
- EXISTING CONDITIONS WERE OBTAINED FROM FIELD SURVEY PREPARED BY COMMONWEALTH ENGINEERS & CONSULTANTS, INC. PROVIDENCE, RI ENTITLED "SITE PLAN SUBMISSION" DATED JUNE 2, 2003 AS AMENDED AUGUST, 2003.
 - THE WETLANDS WERE FLAGGED BY GODDARD CONSULTING, JUNE 2021.
 - THE LOCATION OF EXISTING UTILITIES IS APPROXIMATE. THE CONTRACTOR SHALL VERIFY THE LOCATION OF ALL UTILITIES IN THE FIELD PRIOR TO THE START OF CONSTRUCTION. NOTIFY "DIG-SAFE" AT 1-888-344-7233 AT LEAST 72 HOURS PRIOR TO ANY SITE DEMOLITION OR EXCAVATION.
 - INTERNAL CURBING SHALL BE BITUMINOUS CONCRETE OR CAPE CAD BERM AT THE SELECTION OF THE DEVELOPER AT A MINIMUM.
 - CURBING AT THE ENTRANCES AND CURB RETURNS AT ENTRANCES SHALL BE GRANITE COMMENSURATE WITH THE SURROUNDING ROADWAY, VERTICAL OR SLOPED, THERE SHALL BE A GRANITE TRANSITION BLOCK PRIOR TO BITUMINOUS CONCRETE CURBING.
 - CURBING WHERE THERE IS CONCRETE SIDEWALK SHALL BE INTEGRATED HAUNCHED CONCRETE CURBING.

Not For Construction

WARNING: Joe The Architect, Inc. all drawings and written material herein constitute the original and copyrighted work of the architect, and the same may not be duplicated, used, or disclosed without the written consent of the architect. Contractors to use Architectural drawings for set out. Contractors to check and verify all dimensions on site prior to construction. Any discrepancies should be immediately referred to the Architect. The project manager shall be notified in writing of any discrepancies prior to proceeding with the work. The scale of drawings may change when copied or based. All work to comply with I.C. Regulations and relevant American Standards. © 2019 - all rights reserved.

consultant / contractor information:

LEVEL
 DESIGN GROUP
 CIVIL ENGINEERING / LAND SURVEYING
 249 SOUTH STREET
 UNIT 1
 PLAINVILLE, MA 02762
 TEL. (508) 695-2221 FAX. (508) 695-2219

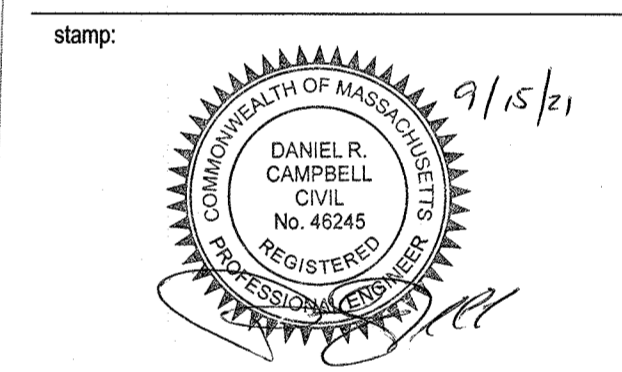

revision	revision description	date
1	COMMENT RESPONSE	9-15-2021


project title:
FACTORY SQUARE FRANKLIN
 5 FISHER STREET, FRANKLIN, MA 02038

client information:
K FISHER STREET LLC
 1 FISHER STREET, FRANKLIN, MA 02038

J t A
JOE THE ARCHITECT
 343 Medford Street, Suite 4C Somerville, MA 02145
 t: +1(617) 784-3593 e: askjoe@joethearchitect.com
 www.joethearchitect.com



drawing title:
LAYOUT & MATERIALS

project number	drawing scale	approver
1899.00	1" = 40'	
drawing number	revision	
C-2.0		

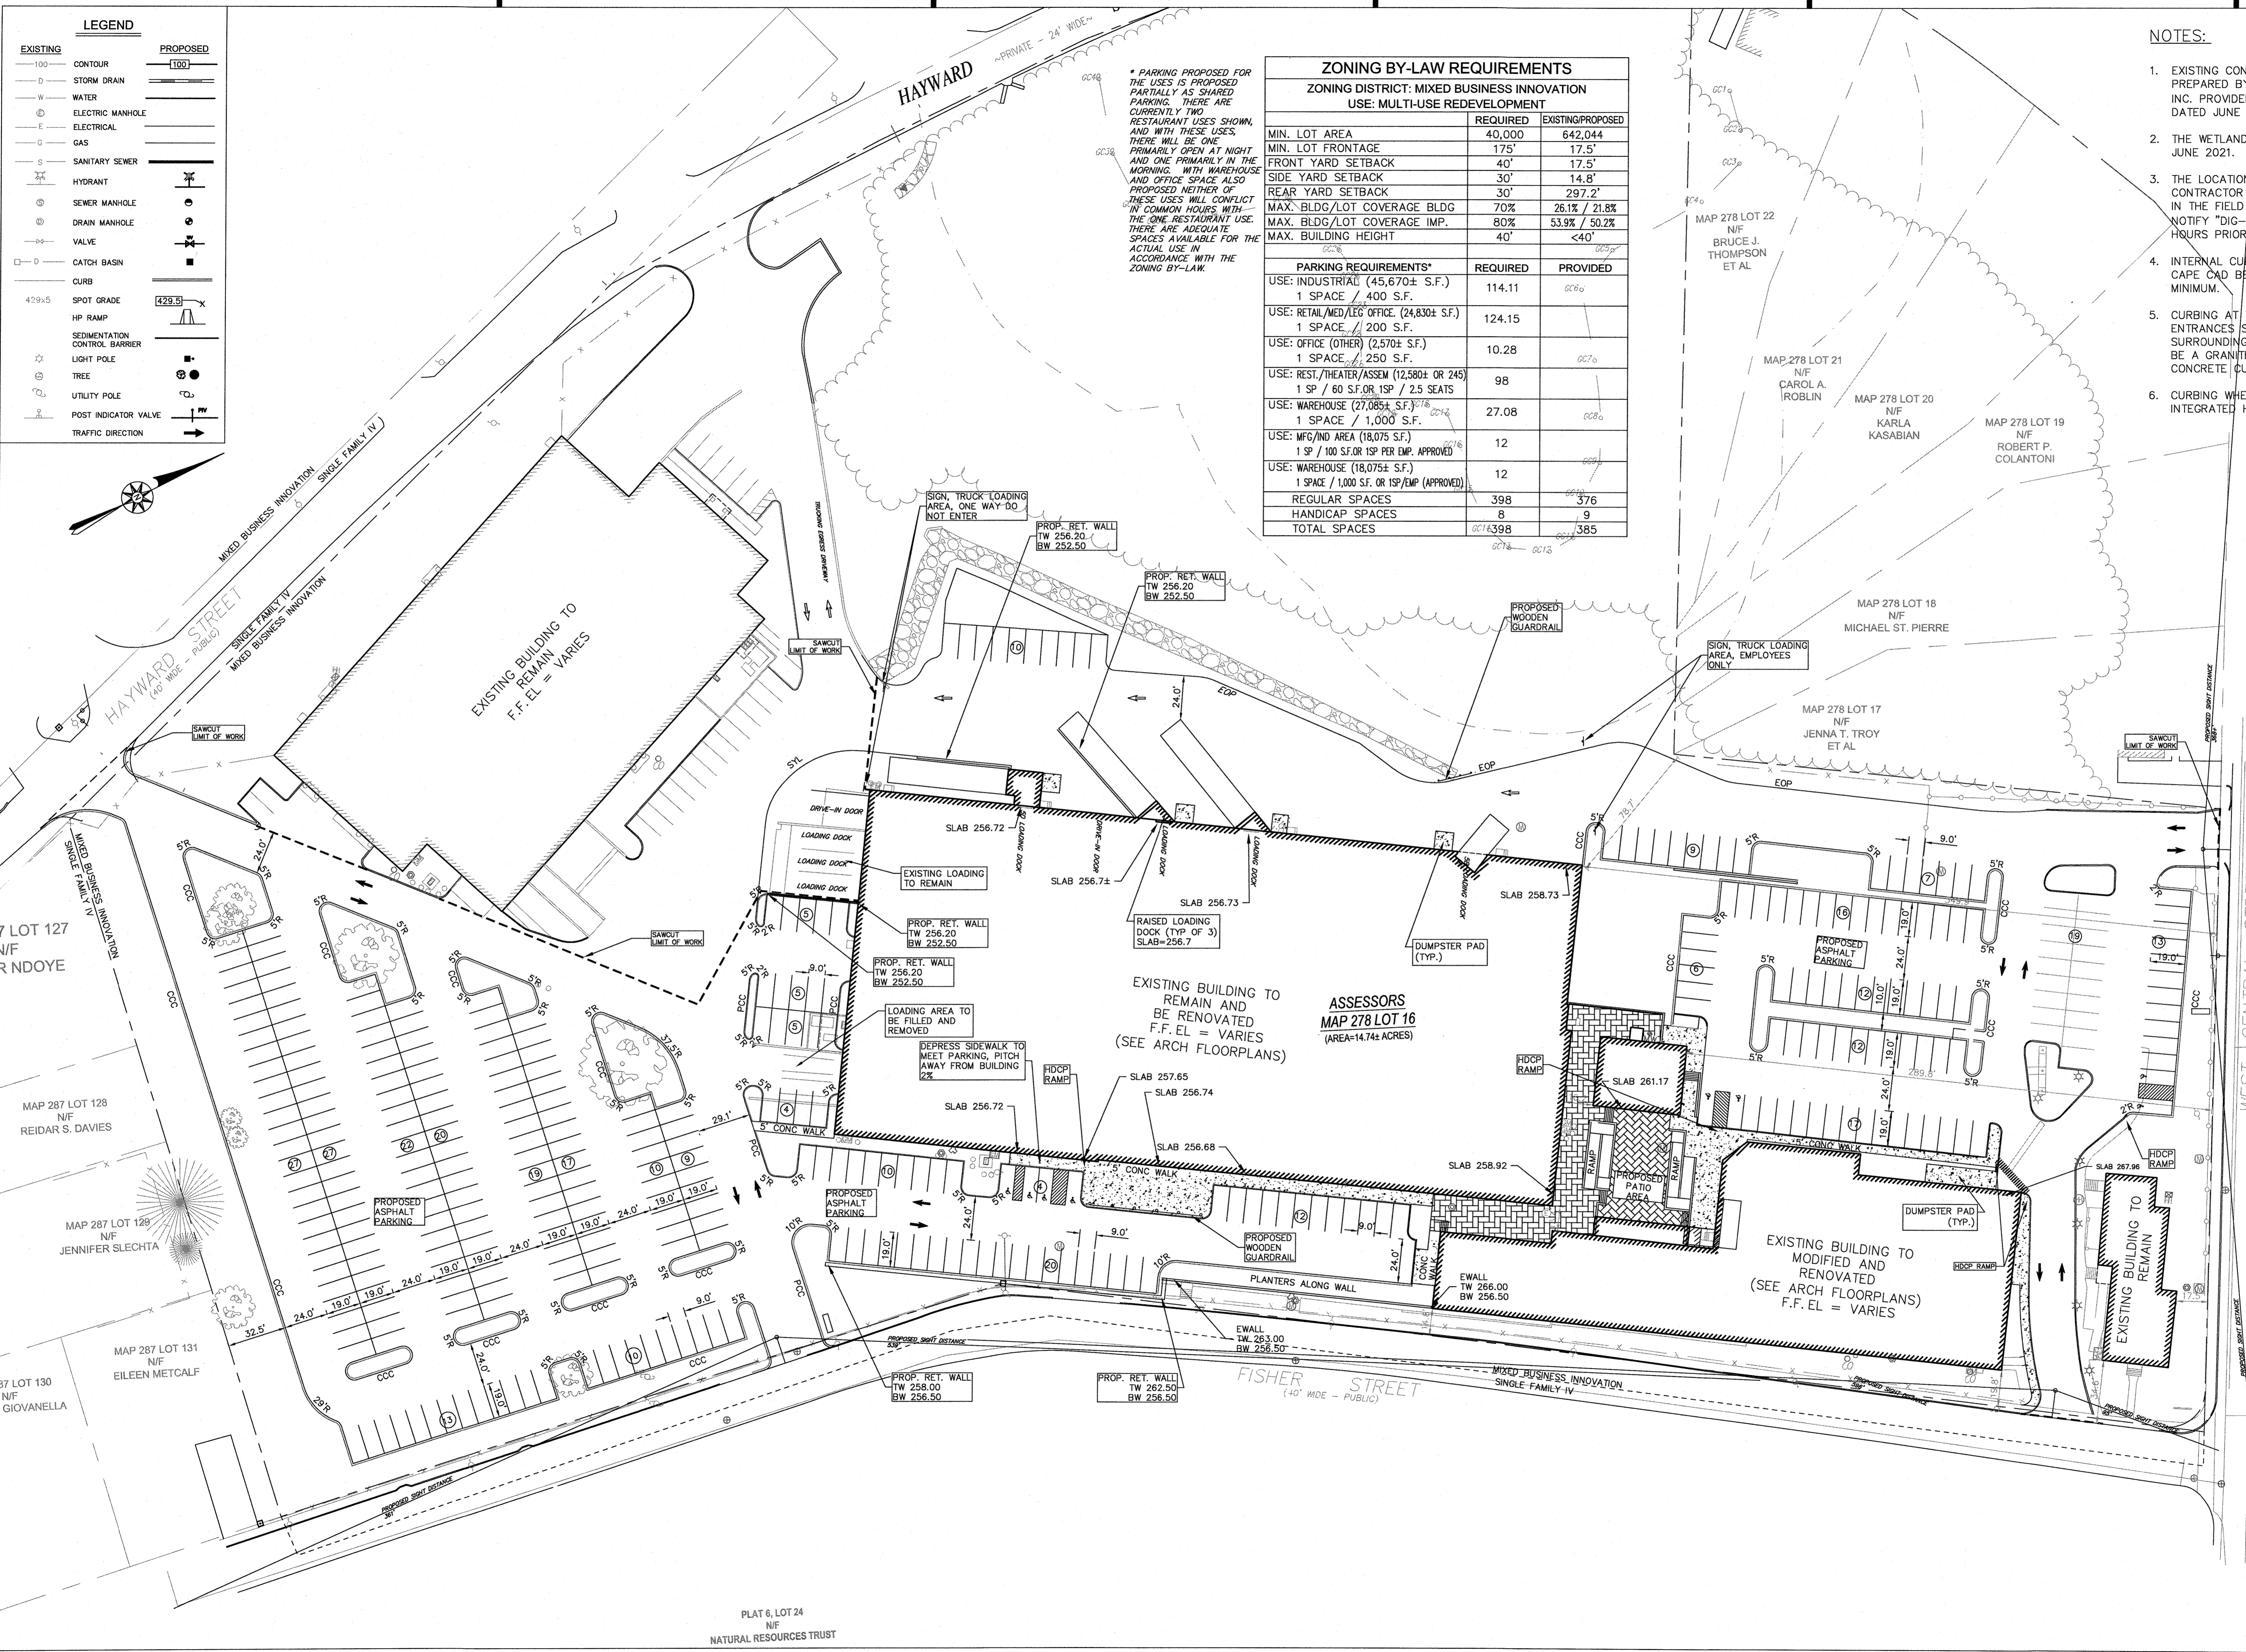

PLAT 6, LOT 24
 N/F
 NATURAL RESOURCES TRUST

LEGEND	
EXISTING	PROPOSED
100	100
D	STORM DRAIN
W	WATER
E	ELECTRIC MANHOLE
E	ELECTRICAL
G	GAS
S	SANITARY SEWER
H	HYDRANT
SM	SEWER MANHOLE
DM	DRAIN MANHOLE
V	VALVE
C	CATCH BASIN
CURB	CURB
429.5	SPOT GRADE
HP	HP RAMP
SCB	SEDIMENTATION CONTROL BARRIER
LP	LIGHT POLE
T	TREE
UP	UTILITY POLE
PIV	POST INDICATOR VALVE
TD	TRAFFIC DIRECTION

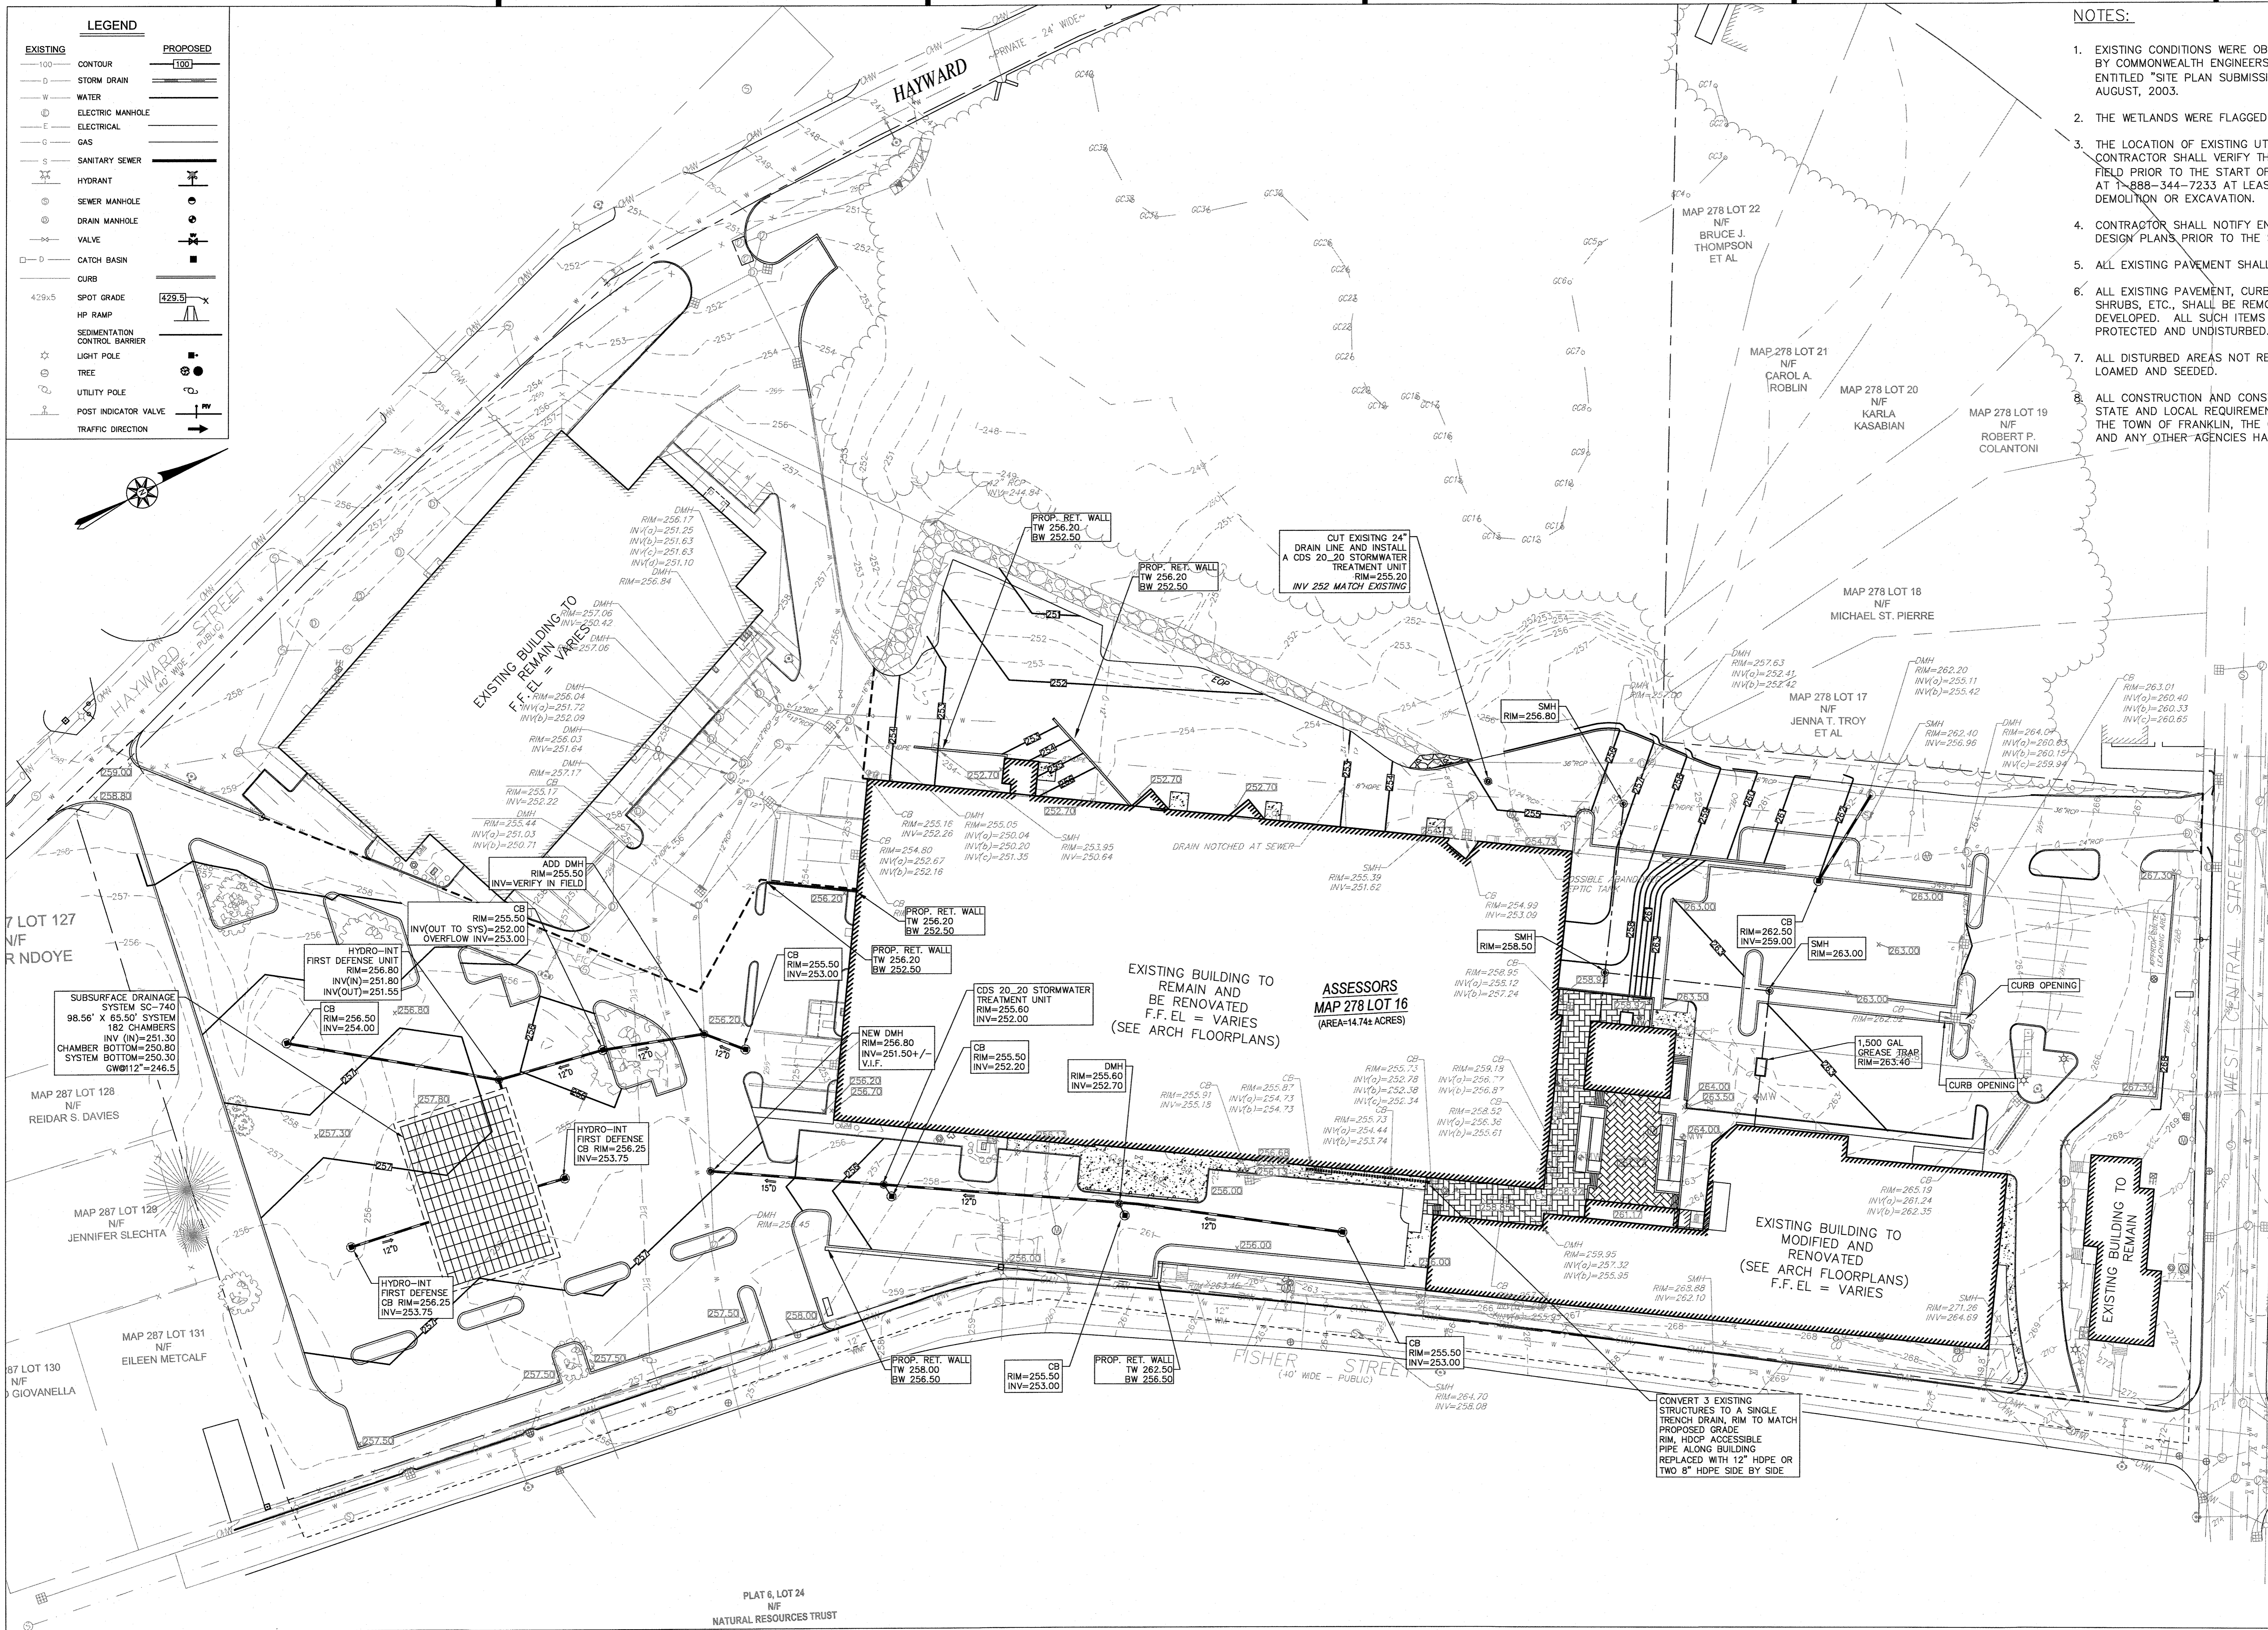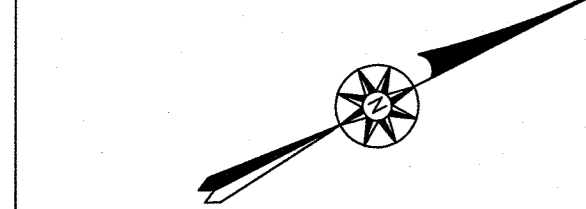

- NOTES:**
- EXISTING CONDITIONS WERE OBTAINED FROM FIELD SURVEY PREPARED BY COMMONWEALTH ENGINEERS & CONSULTANTS, INC. PROVIDENCE, RI ENTITLED "SITE PLAN SUBMISSION" DATED JUNE 2, 2003 AS AMENDED AUGUST, 2003.
 - THE WETLANDS WERE FLAGGED BY GODDARD CONSULTING, JUNE 2021.
 - THE LOCATION OF EXISTING UTILITIES IS APPROXIMATE, THE CONTRACTOR SHALL VERIFY THE LOCATION OF ALL UTILITIES IN THE FIELD PRIOR TO THE START OF CONSTRUCTION. NOTIFY "DIG-SAFE" AT 1-888-344-7233 AT LEAST 72 HOURS PRIOR TO ANY SITE DEMOLITION OR EXCAVATION.
 - CONTRACTOR SHALL NOTIFY ENGINEER OF ANY DISCREPANCIES IN THE DESIGN PLANS PRIOR TO THE START OF CONSTRUCTION.
 - ALL EXISTING PAVEMENT SHALL BE SAWCUT PRIOR TO REMOVAL.
 - ALL EXISTING PAVEMENT, CURB, WALKS, UTILITIES, LIGHT POLES, TREES, SHRUBS, ETC., SHALL BE REMOVED FROM THE AREAS TO BE DEVELOPED. ALL SUCH ITEMS NOT WITHIN THE WORK AREA SHALL BE PROTECTED AND UNDISTURBED.
 - ALL DISTURBED AREAS NOT RECEIVING IMPROVEMENTS SHALL BE LOAMED AND SEEDED.
 - ALL CONSTRUCTION AND CONSTRUCTION ACTIVITIES SHALL CONFORM TO STATE AND LOCAL REQUIREMENTS. INCLUDING BUT NOT LIMITED TO THE TOWN OF FRANKLIN, THE COMMONWEALTH OF MASSACHUSETTS AND ANY OTHER AGENCIES HAVING JURISDICTION.

Not For Construction

WARNING: Joe The Architect, Inc. all drawings and written material herein constitute the original and unaltered work of the architect, and the same may not be duplicated, used, or disclosed without the written consent of the architect. Contractors to use Architectural drawings for use only. Contractors to check and verify all dimensions on site prior to Construction/Fabrication. Field Dimensions take precedence over Scaled Dimensions. Any discrepancies should be immediately referred to the Architect. The project manager shall be notified in writing of any discrepancies prior to proceeding with the work. The scope of drawings may change when copied or used. All work to comply with U.S.C. Regulations and relevant American Standards. © 2019 - all rights reserved.

consultant / contractor information:

LEVEL
DESIGN GROUP
CIVIL ENGINEERING / LAND SURVEYING
249 SOUTH STREET
UNIT 1
PLAINVILLE, MA 02762
TEL. (508) 695-2211 FAX. (508) 695-2219

stamp:

revision	revision description	date
1	COMMENT RESPONSE	9-15-2021

project title:
FACTORY SQUARE FRANKLIN
5 FISHER STREET, FRANKLIN, MA 02038
client information:
K FISHER STREET LLC
1 FISHER STREET, FRANKLIN, MA 02038

J t A
JOE THE ARCHITECT
343 Medford Street, Suite 4C Somerville, MA 02145
t + (617) 764-5559 e. joe@joethearchitect.com
www.joethearchitect.com

drawing title
GRADING & UTILITIES

project number	drawing scale	approver
1899.00	1" = 40'	
drawing number		revision
C-3.0		

PLAT 6, LOT 24
NATURAL RESOURCES TRUST

LEGEND	
EXISTING	PROPOSED
100	100
—	—
D	—
W	—
E	—
G	—
S	—
H	—
SMH	—
DMH	—
V	—
C	—
429.5	429.5
HP	—
SB	—
L	—
T	—
U	—
P	—
TD	—

EROSION CONTROL NOTES

SILTATION CONTROL USING EROSION CONTROL FENCE WITH STRAW WATTLE, OR APPROVED EQUAL
 EROSION CONTROL LINE IS TO BE VISUALLY INSPECTED AFTER EVERY RAIN FALL AND REPAIRS MADE AS REQUIRED TO THE SILTATION CONTROL FENCE AND STRAW WATTLE AFTER EACH RAIN FALL. CLEANOUT OF ACCUMULATED SEDIMENT BEHIND THE WATTLE IS NECESSARY IF 1/2 OF THE ORIGINAL HEIGHT OF THE WATTLE APPEARS TO HAVE BEEN INUNDATED WITH SEDIMENT.

PRESERVE TOPSOIL
 SITE OWNERS AND OPERATORS MUST PRESERVE EXISTING TOPSOIL ON THE CONSTRUCTION SITE TO THE MAXIMUM EXTENT FEASIBLE AND AS NECESSARY TO SUPPORT HEALTHY VEGETATION, PROMOTE SOIL STABILIZATION, AND INCREASE STORMWATER INFILTRATION RATES IN THE POST-CONSTRUCTION PHASE OF THE PROJECT.

STABILIZATION OF SOILS
 UPON COMPLETION AND ACCEPTANCE OF SITE PREPARATION AND INITIAL INSTALLATION OF EROSION, RUNOFF, AND SEDIMENT CONTROLS AND TEMPORARY POLLUTION PREVENTION MEASURES, THE OPERATOR SHALL INITIATE APPROPRIATE TEMPORARY OR PERMANENT STABILIZATION PRACTICES DURING ALL PHASES OF CONSTRUCTION ON ALL DISTURBED AREAS AS SOON AS POSSIBLE, BUT NOT MORE THAN FOURTEEN (14) DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT AREA HAS TEMPORARILY OR PERMANENTLY CEASED. SLOPES IN EXCESS OF 3:1 SHALL HAVE 22 MONTH EROSION CONTROL FABRIC INSTALLED OVER A SLOPE MIX SEED MIX WITH TACKIFIER UNLESS OTHERWISE SPECIFIED.

ANY DISTURBED AREAS THAT WILL NOT HAVE ACTIVE CONSTRUCTION ACTIVITY OCCURRING WITHIN 14 DAYS MUST BE STABILIZED USING THE CONTROL MEASURES DEPICTED IN SITE PLANS, IN ACCORDANCE WITH THE STORMWATER POLLUTION PREVENTION PLAN, AND PER MANUFACTURER PRODUCT SPECIFICATIONS.

ONLY AREAS THAT CAN BE REASONABLY EXPECTED TO HAVE ACTIVE CONSTRUCTION WORK BEING PERFORMED WITHIN 14 DAYS OF DISTURBANCE WILL BE CLEARED/GRUBBED AT ANY ONE TIME. IT IS NOT ACCEPTABLE TO CLEAR AND GRUB THE ENTIRE CONSTRUCTION SITE IF PORTIONS WILL NOT BE ACTIVE WITHIN THE 14-DAY TIME FRAME. PROPER PHASING OF CLEARING AND GRUBBING ACTIVITIES SHALL INCLUDE TEMPORARY STABILIZATION TECHNIQUES FOR AREAS CLEARED AND GRUBBED THAT WILL NOT BE ACTIVE WITHIN THE 14-DAY TIME FRAME.

STORMWATER INLET PROTECTION

INLET PROTECTION — WILL BE UTILIZED TO PREVENT SOIL AND DEBRIS FROM ENTERING STORM DRAIN INLETS AND SHALL BE INSTALLED WITHIN BASINS DOWNSTREAM OF DISTURBANCE WITHIN 200' OF THE PROPOSED DISTURBANCE. THESE MEASURES ARE USUALLY TEMPORARY AND ARE IMPLEMENTED BEFORE A SITE IS DISTURBED.

MAINTENANCE — THE OPERATOR MUST CLEAN, OR REMOVE AND REPLACE THE INLET PROTECTION MEASURES AS SEDIMENT ACCUMULATES, THE FILTER BECOMES CLOGGED, AND/OR AS PERFORMANCE IS COMPROMISED. ACCUMULATED SEDIMENT ADJACENT TO THE INLET PROTECTION MEASURES SHOULD BE REMOVED BY THE END OF THE SAME WORK DAY IN WHICH IT IS FOUND OR BY THE END OF THE FOLLOWING WORK DAY IF REMOVAL BY THE SAME WORK DAY IS NOT FEASIBLE.

STORMWATER BASINS — ALL AREAS CONTAINING STORMWATER BASINS (ABOVE OR BELOW GROUND) SHALL BE PROTECTED THROUGHOUT CONSTRUCTION. THESE AREAS ARE NOT TO BE USED FOR MATERIAL STOCKPILES OR FOR PARKING EQUIPMENT. SURFACE BASINS ARE TO BE ROUGH GRADED AND PROTECTED UNTIL STABILIZED AND BROUGHT ON-LINE FOR STORMWATER MANAGEMENT OF THE STABILIZED SITE.

CONSTRUCTION ENTRANCES
 A STONE CONSTRUCTION ENTRANCE SHALL BE INSTALLED AT WHICH TIME THE EXISTING PAVEMENT IS REMOVED. THE STONE ENTRANCE IS NOT NECESSARY UNTIL SUCH TIME AS THE PAVEMENT IS REMOVED. THE ENTRANCE SHALL BE ESTABLISHED AT ONE MAIN POINT OF ENTRY AT THAT TIME.

CONSTRUCTION ENTRANCES SHALL BE USED IN CONJUNCTION WITH THE STABILIZATION OF CONSTRUCTION ROADS TO REDUCE THE AMOUNT OF SEDIMENT TRACKING OFF THE PROJECT. ANY CONSTRUCTION SITE ACCESS POINT MUST EMPLOY THE CONTROL MEASURES ON THE APPROVED SITE PLANS AND IN ACCORDANCE WITH THE STORMWATER POLLUTION PREVENTION PLAN. CONSTRUCTION ENTRANCES SHALL BE USED IN CONJUNCTION WITH THE STABILIZATION OF CONSTRUCTION ROADS TO REDUCE THE AMOUNT OF MUD PICKED UP BY CONSTRUCTION VEHICLES. ALL CONSTRUCTION ACCESS ROADS SHALL BE CONSTRUCTED PRIOR TO ANY ROADWAY ACCEPTING CONSTRUCTION TRAFFIC.

THE SITE OWNER AND OPERATOR MUST WILL RESTRICT VEHICLE USE TO PROPERLY DESIGNATED EXIT POINTS, USE PROPERLY DESIGNED AND CONSTRUCTED CONSTRUCTION ENTRANCES AT ALL POINTS THAT EXIT ONTO PAVED ROADS SO THAT SEDIMENT REMOVAL OCCURS PRIOR TO VEHICLE EXIT. WHEN AND WHERE NECESSARY, USE ADDITIONAL CONTROLS TO REMOVE SEDIMENT FROM VEHICLE TIRES PRIOR TO EXIT (I.E. WHEEL WASHING RACKS, RUMBLE STRIPS, AND RATTLE PLATES). WHERE SEDIMENT HAS BEEN TRACKED OUT FROM THE CONSTRUCTION SITE ONTO THE SURFACE OF OFF-SITE STREETS, OTHER PAVED AREAS, AND SIDEWALKS, THE DEPOSITED SEDIMENT MUST BE REMOVED BY THE END OF THE SAME WORK DAY IN WHICH THE TRACK OCCURS. TRACK-OUT MUST BE REMOVED BY SWEEPING, SHOVELING, OR VACUUMING THESE SURFACES, OR BY USING OTHER SIMILARLY EFFECTIVE MEANS OF SEDIMENT REMOVAL.

STOCKPILE CONTAINMENT

SHALL BE USED ONSITE TO MINIMIZE OR ELIMINATE THE DISCHARGE OF SOIL, TOPSOIL, BASE MATERIAL OR RUBBLE, FROM ENTERING DRAINAGE SYSTEMS OR SURFACE WATERS. ALL STOCKPILES MUST BE LOCATED WITHIN THE LIMIT OF DISTURBANCE, PROTECTED FROM RUN-ON WITH THE USE OF TEMPORARY SEDIMENT BARRIERS AND PROVIDED WITH COVER OR STABILIZATION TO AVOID CONTACT WITH PRECIPITATION AND WIND WHERE AND WHEN PRACTICAL. STOCK PILE MANAGEMENT CONSISTS OF PROCEDURES AND PRACTICES DESIGNED TO MINIMIZE OR ELIMINATE THE DISCHARGE OF STOCKPILED MATERIAL (SOIL, TOPSOIL, BASE MATERIAL, RUBBLE) FROM ENTERING DRAINAGE SYSTEMS OR SURFACE WATERS.


FOR ANY STOCKPILES OR LAND CLEARING DEBRIS COMPOSED, IN WHOLE OR IN PART, OF SEDIMENT OR SOIL, YOU MUST COMPLY WITH THE FOLLOWING REQUIREMENTS — LOCATE PILES WITHIN THE DESIGNATED LIMITS OF DISTURBANCE OUTSIDE OF THE 100-FOOT BUFFER ZONE, PROTECT FROM CONTACT WITH STORMWATER (INCLUDING RUN-ON) USING A TEMPORARY PERIMETER SEDIMENT BARRIER; WHERE PRACTICABLE, PROVIDE COVER OR APPROPRIATE TEMPORARY VEGETATIVE OR STRUCTURAL STABILIZATION TO AVOID DIRECT CONTACT WITH PRECIPITATION OR TO MINIMIZE SEDIMENT DISCHARGE; NEVER HOSE DOWN OR SWEEP SOIL OR SEDIMENT ACCUMULATED ON PAVEMENT OR OTHER IMPERVIOUS SURFACES INTO ANY STORMWATER CONVEYANCE, STORM DRAIN INLET, OR SURFACE WATER; TO THE MAXIMUM EXTENT PRACTICABLE, CONTAIN AND SECURELY PROTECT FROM WIND.

TEMPORARY SEDIMENT BASINS

IF REQUIRED, ADDITIONAL TEMPORARY SEDIMENT BASINS SHALL BE CONSTRUCTED TO MITIGATE THE POTENTIAL SEDIMENT LOADING TO THE ADJACENT RESOURCE AREAS. TEMPORARY SEDIMENT BASINS ARE TO BE LOCATED OUTSIDE OF THE 50-FOOT BUFFER ZONE TO THE BORDERING VEGETATED WETLANDS AND SHALL NOT BE LOCATED IN AN AREA WHERE AN INFILTRATION BASIN IS PROPOSED. TEMPORARY SEDIMENT BASIN GRADING LOCATION SHALL BE DICTATED BY THE DESIGN ENGINEER. AT A MINIMUM THE VOLUME OF THE TEMPORARY SEDIMENT BASIN, AS MEASURED FROM THE BOTTOM OF THE BASE TO THE ELEVATION OF THE CREST OF THE PRINCIPAL SPILLWAY SHALL BE AT LEAST 3,600 CUBIC FEET PER ACRE OF DRAINAGE AREA. THIS 3,600 CUBIC FEET IS EQUIVALENT TO 1.0 INCH OF SEDIMENT PER ACRE OF DRAINAGE AREA. ADDITIONAL STORAGE IN THE FORM OF A PERMANENT WET POOL SHALL BE PROVIDED WHENEVER PRACTICABLE, BUT MAY NOT BE USED TO FULFILL THE TEMPORARY STORAGE VOLUME REQUIREMENT.

SEDIMENT BASINS SHALL BE CLEANED OUT WHEN THE VOLUME REMAINING AS DESCRIBED ABOVE IS REDUCED BY SEDIMENTATION TO 1,800 CUBIC FEET PER ACRE OF DRAINAGE AREA (50 PERCENT FULL). IN NO CASE SHALL THE SEDIMENT LEVEL BE PERMITTED TO BUILD UP HIGHER THAN ONE FOOT BELOW THE PRINCIPAL SPILLWAY CREST. AT THIS ELEVATION, CLEANOUT SHALL BE PERFORMED TO RESTORE THE ORIGINAL DESIGN VOLUME TO THE SEDIMENT BASIN. THE ELEVATION OF THE MAXIMUM ALLOWABLE SEDIMENT LEVEL SHALL BE DETERMINED AND SHALL BE STATED IN THE DESIGN DATA AS A DISTANCE BELOW THE TOP OF THE RISER AND BE CLEARLY MARKED ON THE RISER. **NO AREA OF DETENTION SHALL BE UTILIZED FOR TEMPORARY EROSION CONTROL OR DEWATERING ACTIVITIES.**

- NOTES:**
- EXISTING CONDITIONS WERE OBTAINED FROM FIELD SURVEY PREPARED BY COMMONWEALTH ENGINEERS & CONSULTANTS, INC. PROVIDENCE, RI ENTITLED "SITE PLAN SUBMISSION" DATED JUNE 2, 2003 AS AMENDED AUGUST, 2003.
 - THE WETLANDS WERE FLAGGED BY GODDARD CONSULTING, JUNE 2021.
 - THE LOCATION OF EXISTING UTILITIES IS APPROXIMATE, THE CONTRACTOR SHALL VERIFY THE LOCATION OF ALL UTILITIES IN THE FIELD PRIOR TO THE START OF CONSTRUCTION. NOTIFY "DIG-SAFE" AT 1-888-344-7233 AT LEAST 72 HOURS PRIOR TO ANY SITE DEMOLITION OR EXCAVATION.

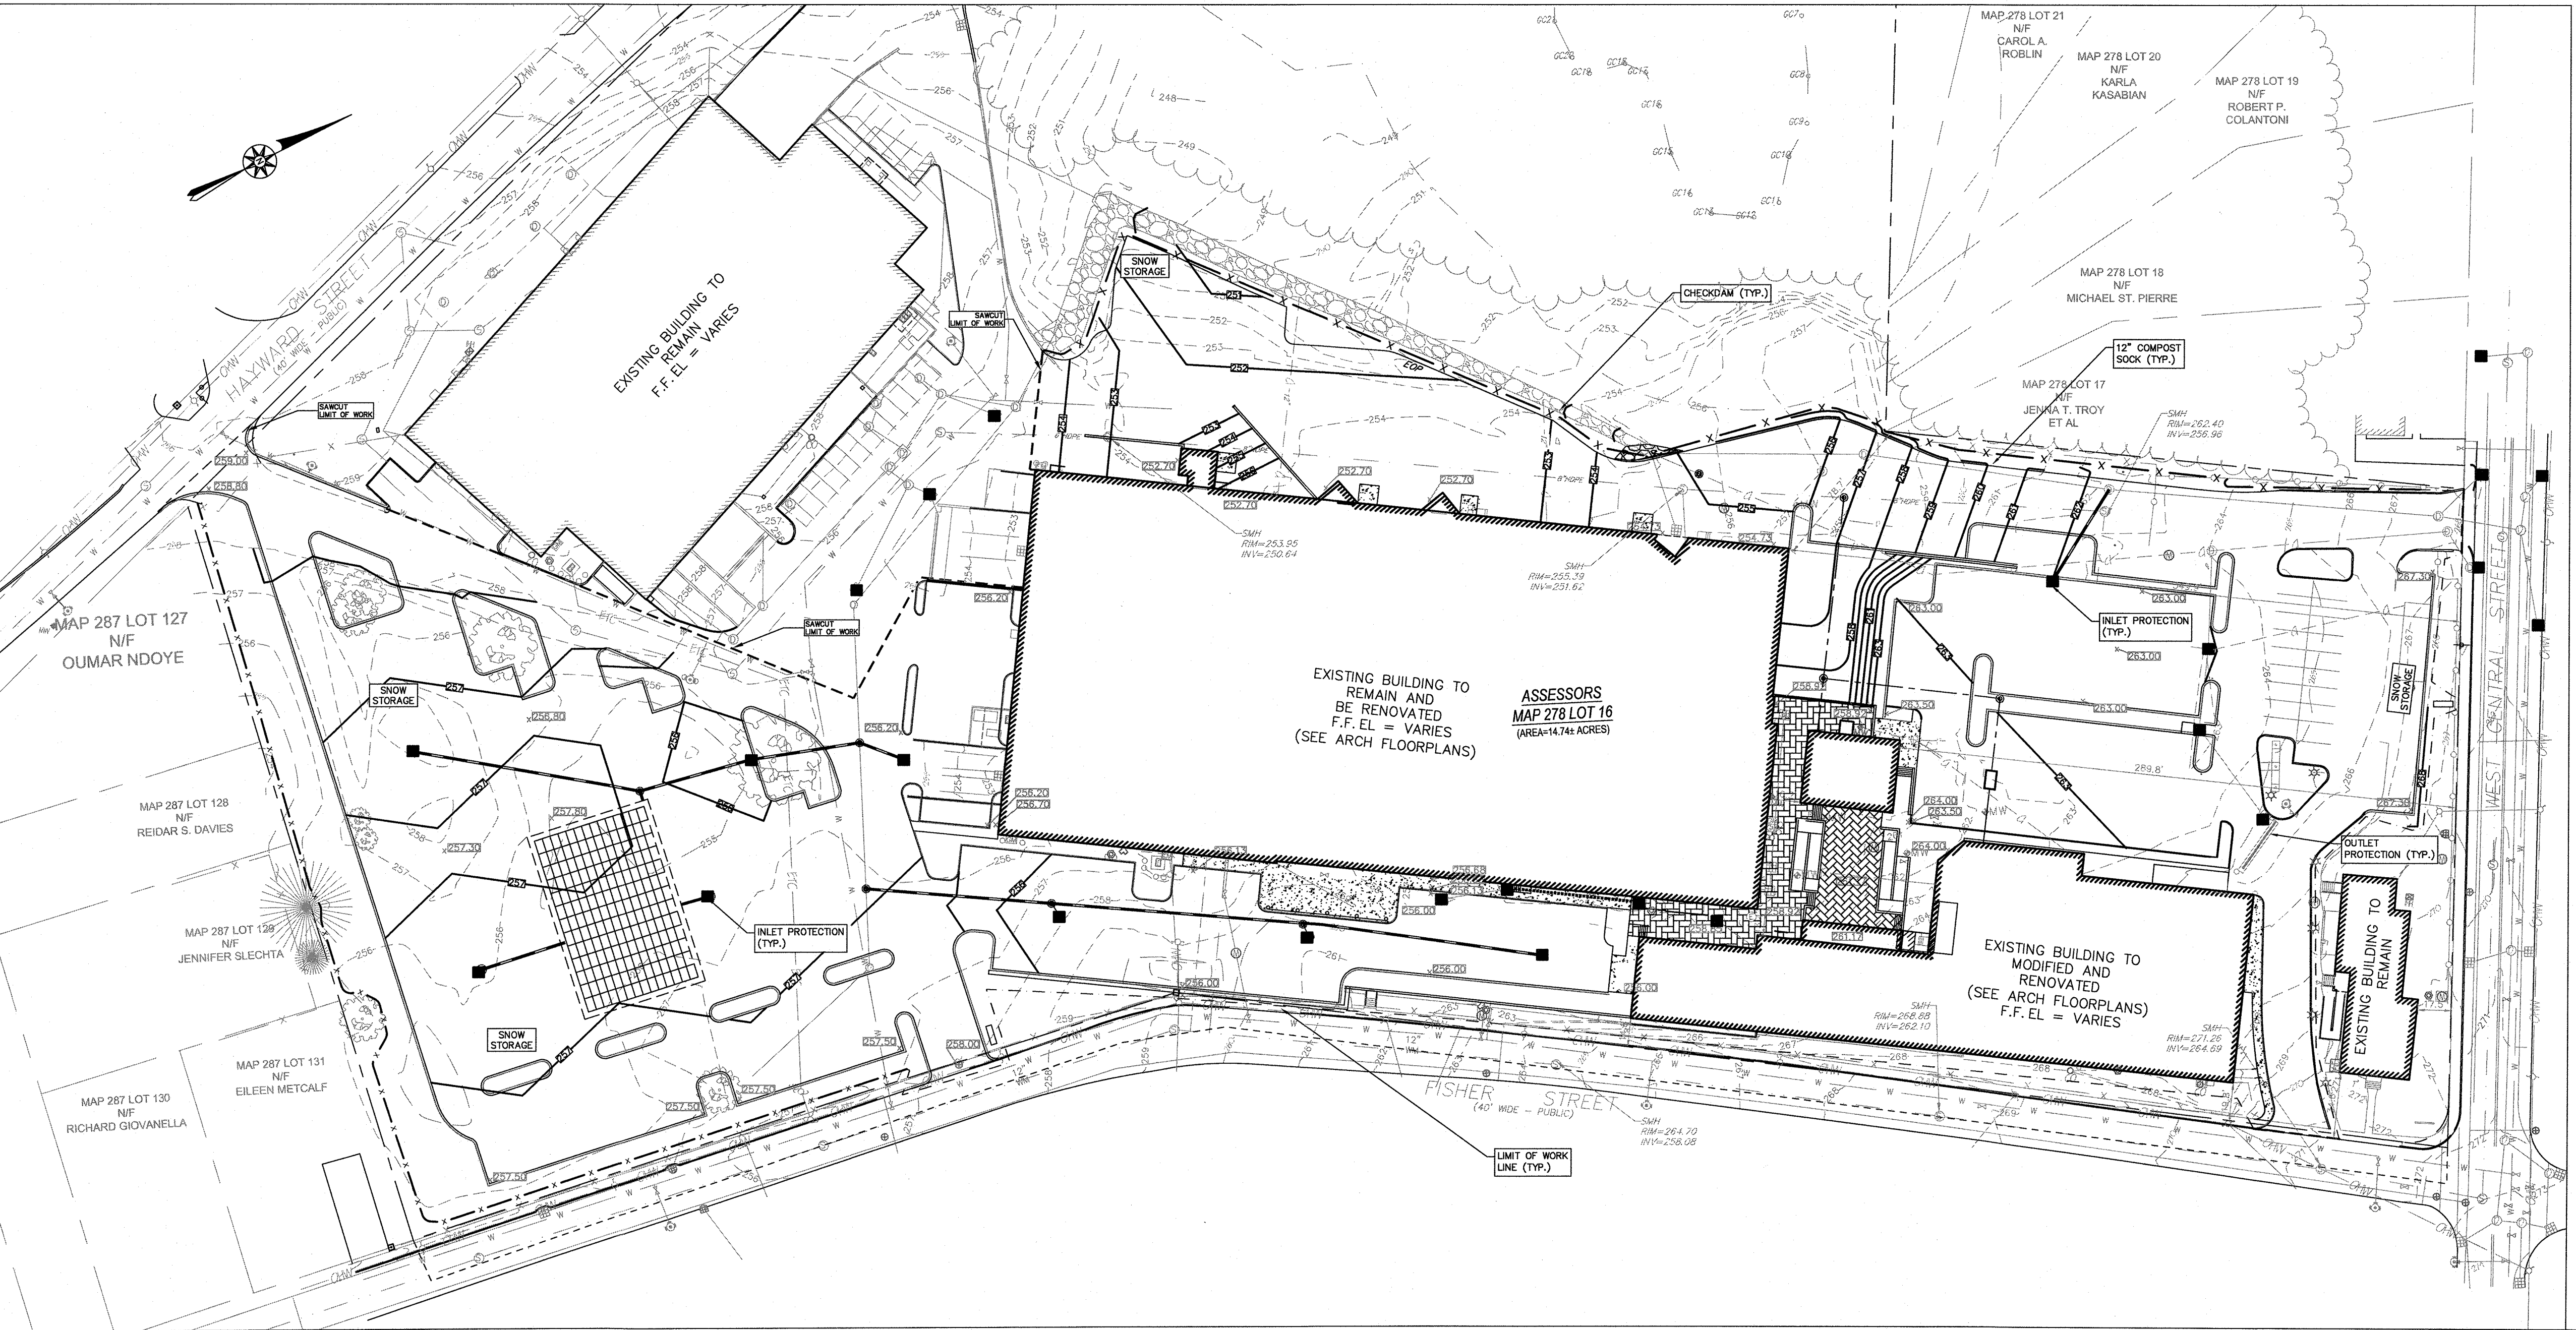


Not For Construction

WARNING: Joe The Architect, Inc., all drawings and written material herein constitute the original and unpublished work of the architect, and the same may not be duplicated, used, or disclosed without the written consent of the architect. Contractors to use Architectural drawings for set out. Contractors to check and verify all Dimensions on the plan to Correspond to Fabrication. Figure Dimensions take precedence over Scale Dimensions. Any discrepancies should be immediately referred to the Architect. The project manager shall be notified in writing of any discrepancies prior to proceeding with the work. The scale of drawings may change when copied or traced. All work to comply with I.B.C. Regulations and related American Standards. © 2019 - all rights reserved.

consultant / contractor information:

LEVEL
 DESIGN GROUP
 CIVIL ENGINEERING / LAND SURVEYING
 249 SOUTH STREET
 UNIT 1
 PLAINVILLE, MA 02762
 TEL. (508) 695-2221 FAX. (508) 695-2219

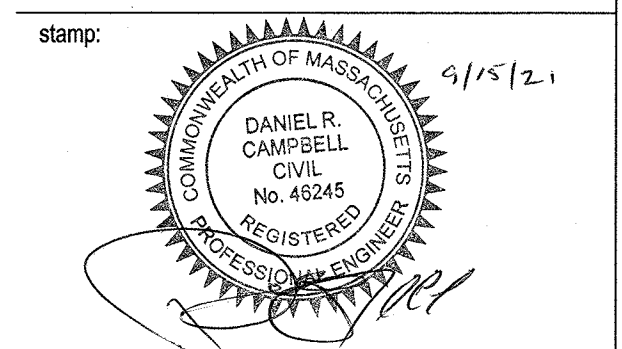

revision	revision description	date
1	COMMENT RESPONSE	9-15-2021

project title:
FACTORY SQUARE FRANKLIN

5 FISHER STREET, FRANKLIN, MA 02038






client information:
 K FISHER STREET LLC

1 FISHER STREET, FRANKLIN, MA 02038

J t A
JOE THE ARCHITECT
 343 Medford Street, Suite 4C Somerville, MA 02145
 t: +1(617) 764-3593 e: askjoe@joethearchitect.com
 www.joethearchitect.com

drawing title
EROSION CONTROL PLAN


project number 1899.00	drawing scale 1" = 50'	approver
drawing number C-3.1		revision

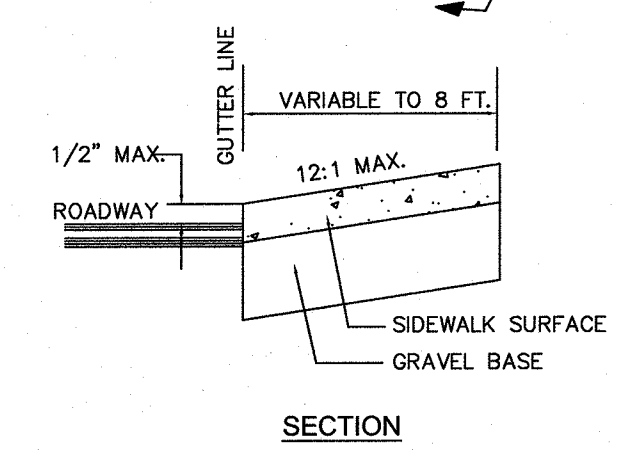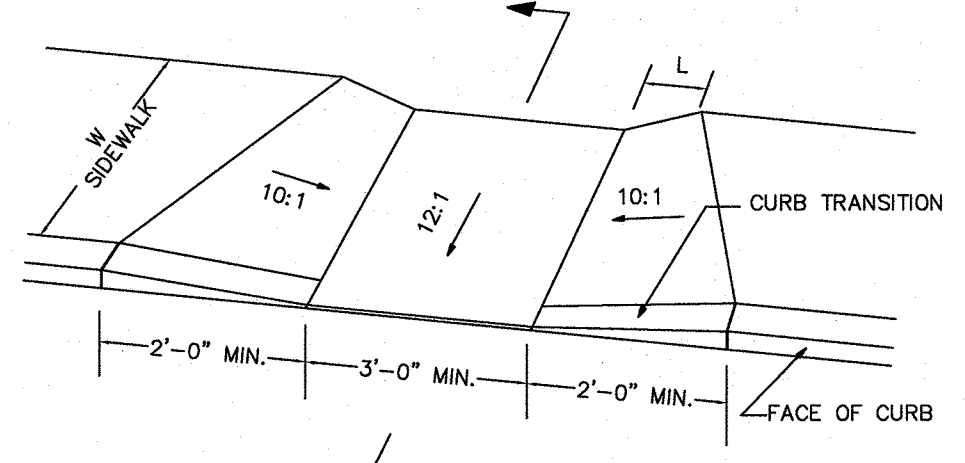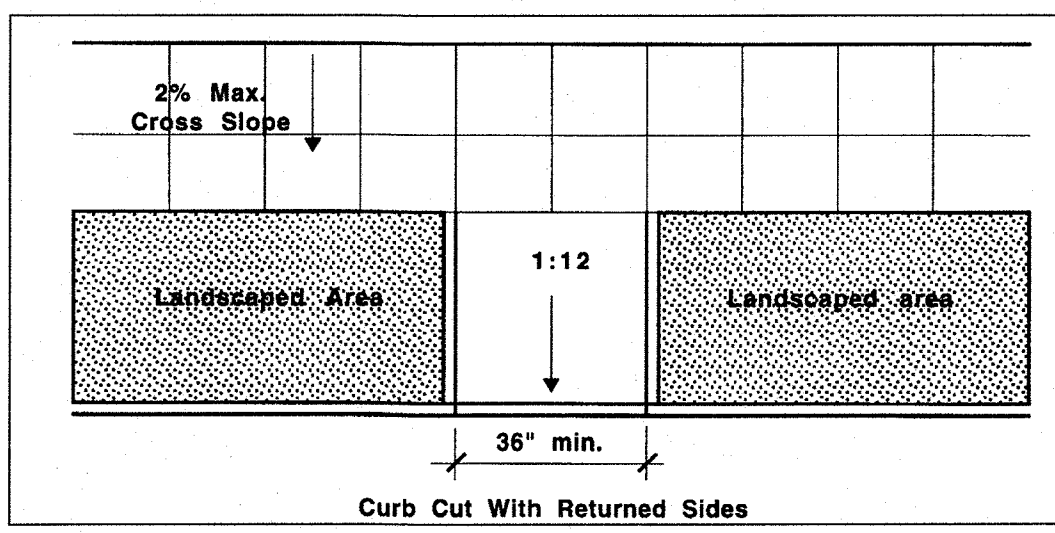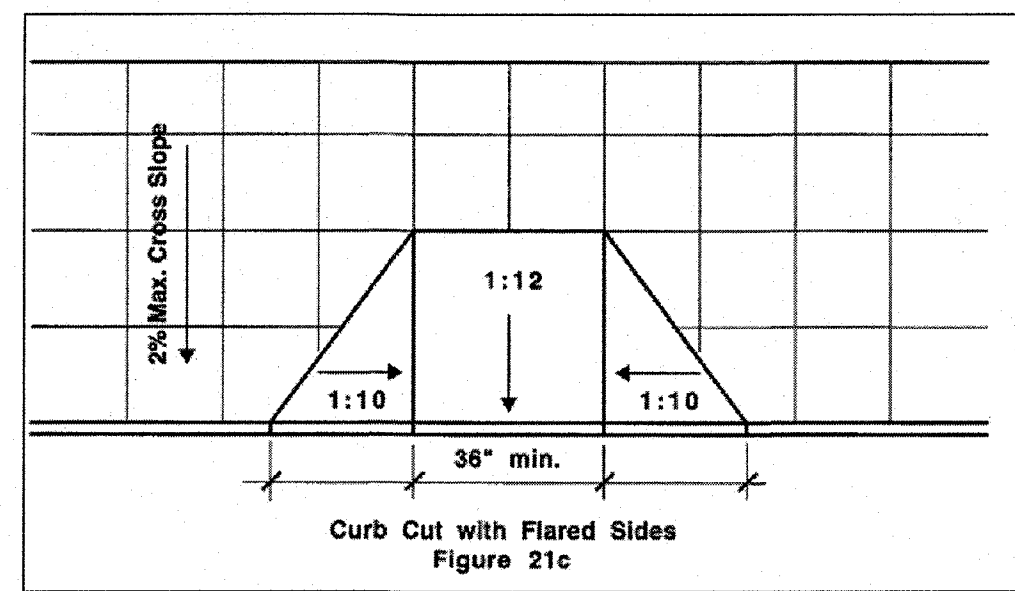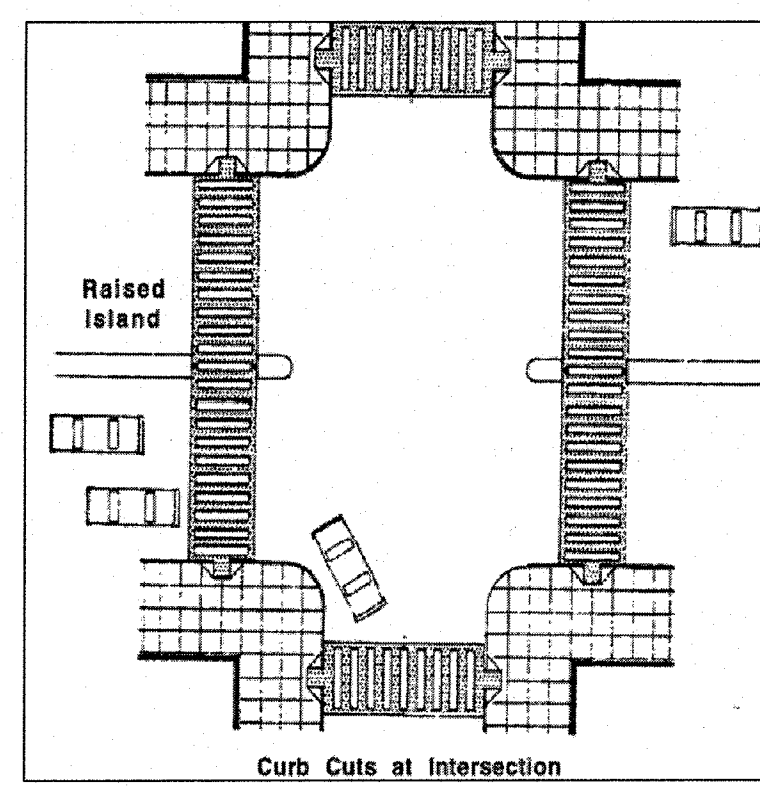


WHEEL CHAIR RAMP
NOT TO SCALE

W	L
4'-0"	3'-6"
5'-0"	2'-9"
6'-0"	2'-0"
7'-0"	1'-0"
8'-0"	0'-0"


NOTE:
CEMENT CONCRETE RAMPS TO BE TEXTURED WITH A STIFF BROOM FINISH.

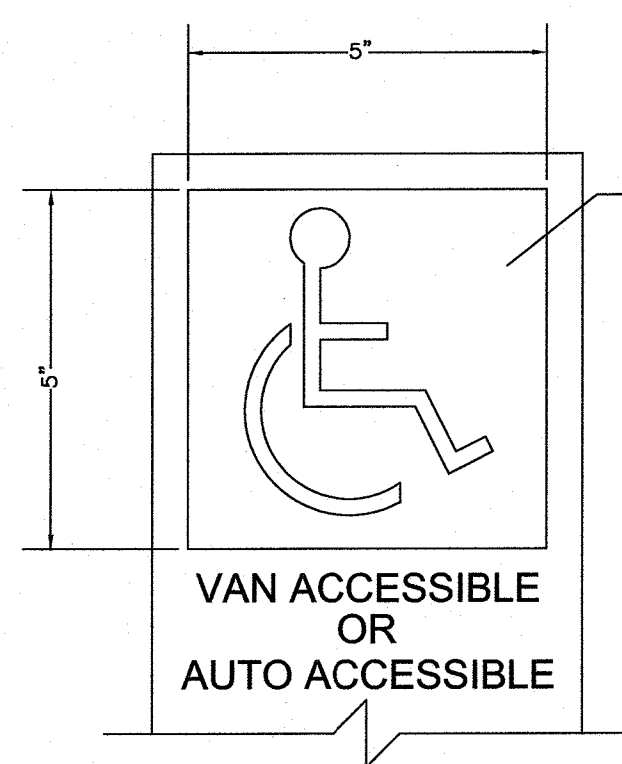

SIGNAGE GRAPHIC
NOT TO SCALE

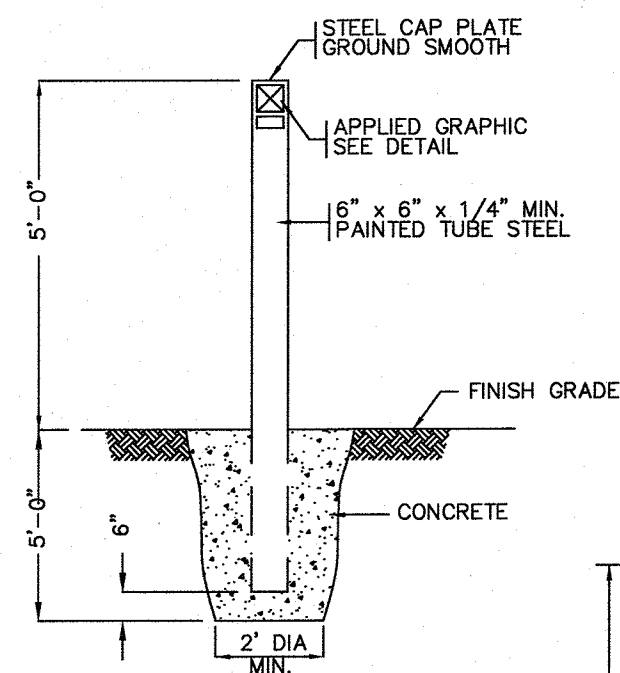


SIGNAGE BOLLARD
NOT TO SCALE

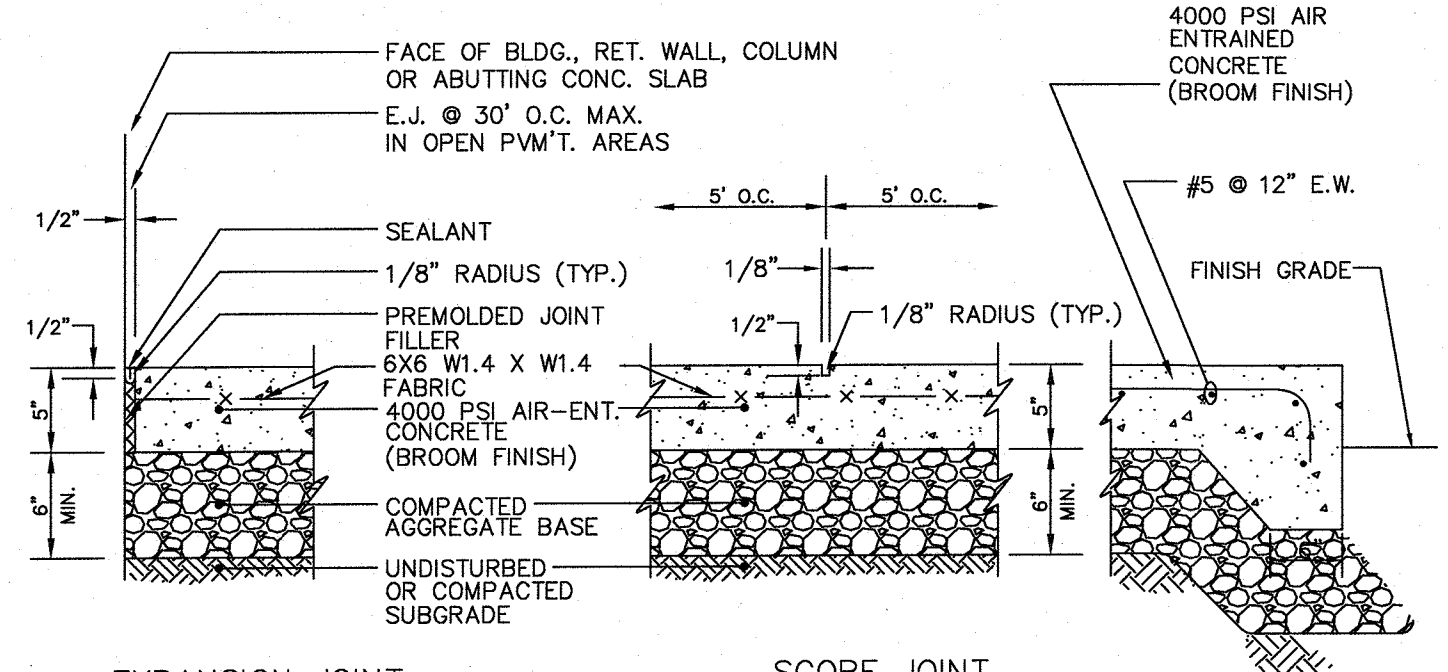


1. MAXIMUM CROSS SLOPE = 2%
2. MAXIMUM GRADIENT = 5%
3. PROVIDE EXPANSION JOINT AT FACE OF ADJUTING SLABS AND STRUCTURES.
4. PROVIDE VERTICAL GRANITE OR PRECAST CONCRETE CURBING PER SHEET C3.


CONCRETE SIDEWALK
NOT TO SCALE

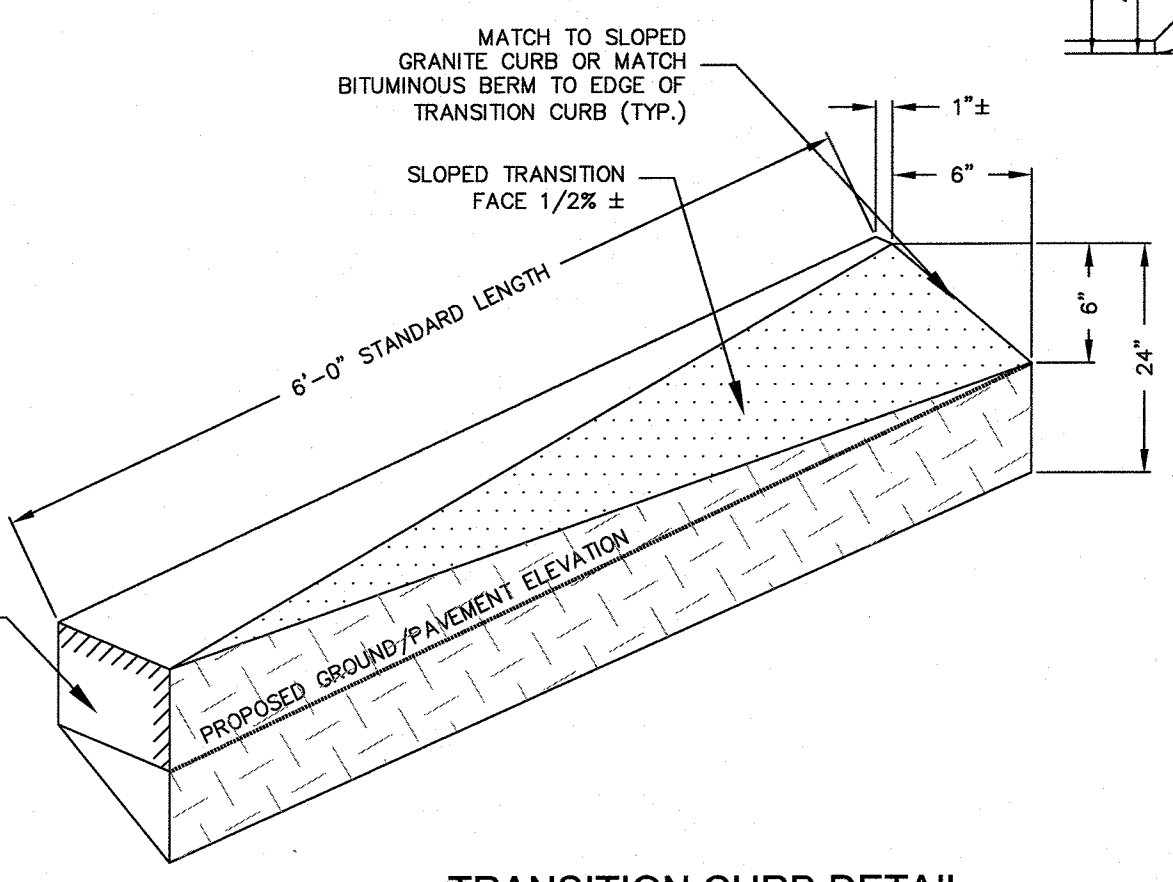


TRANSITION CURB DETAIL
NOT TO SCALE

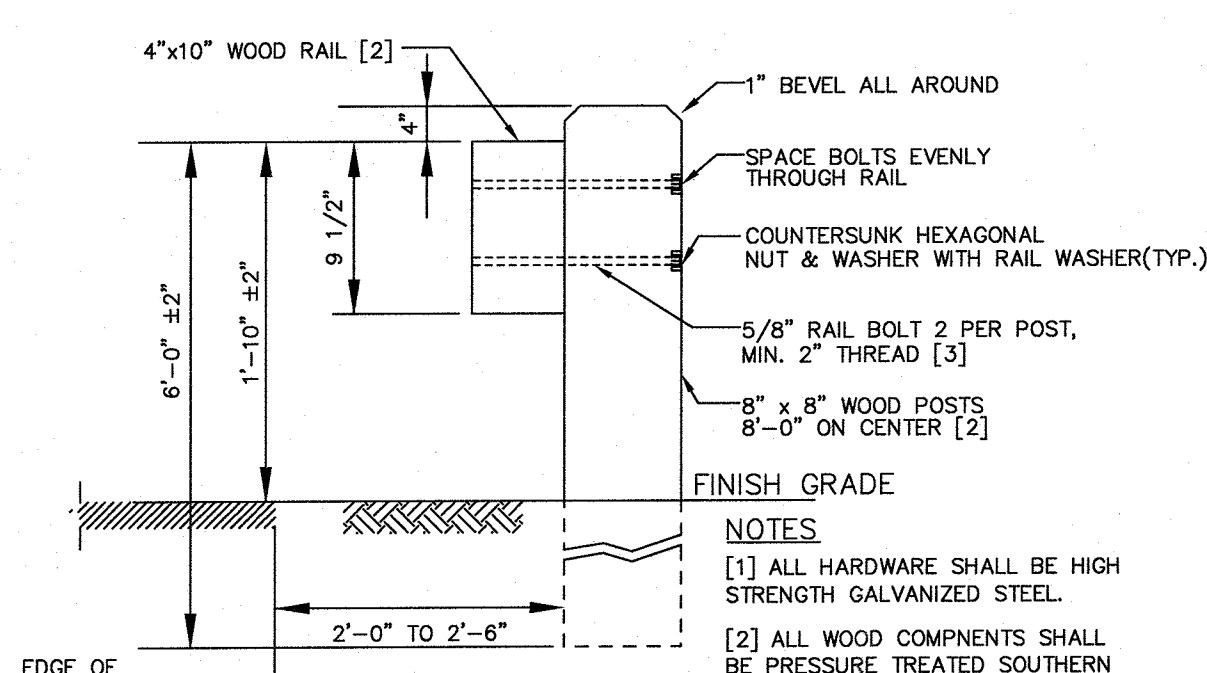


WOOD GUARDRAIL
NOT TO SCALE

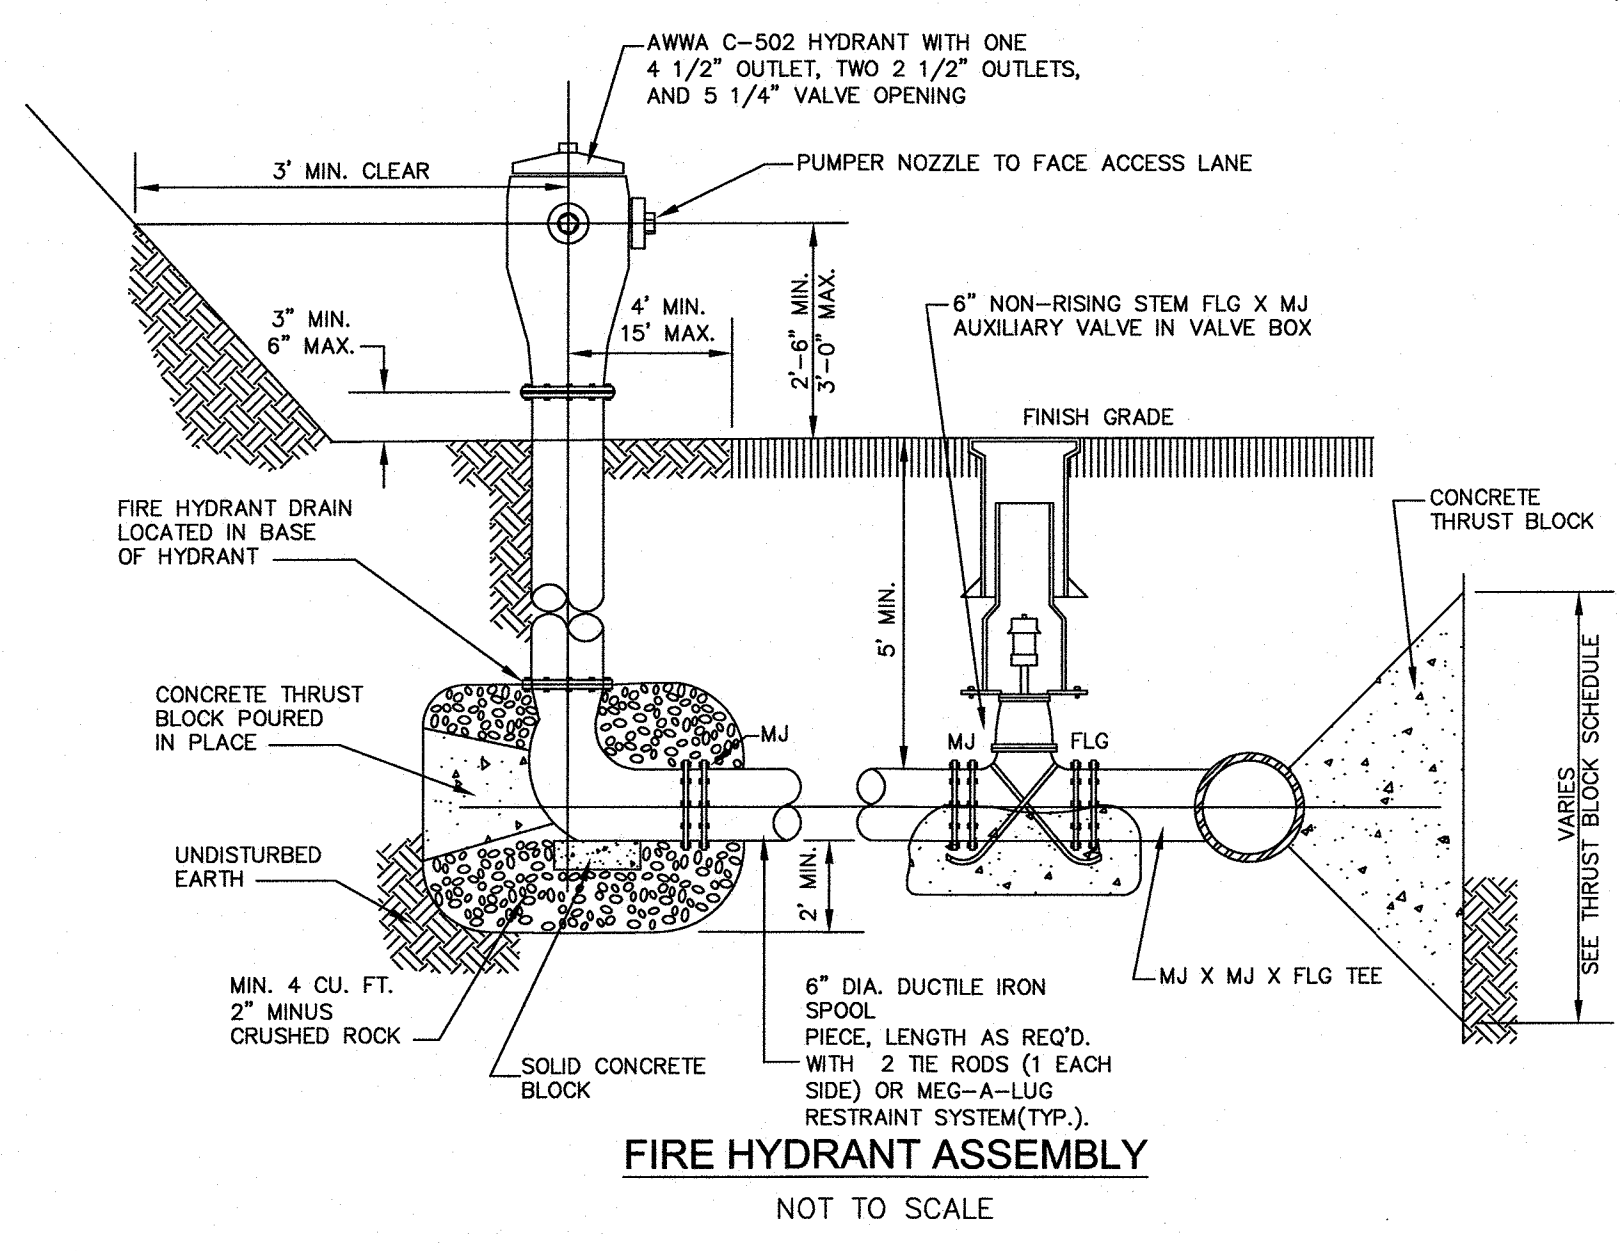

FIRE HYDRANT ASSEMBLY
NOT TO SCALE

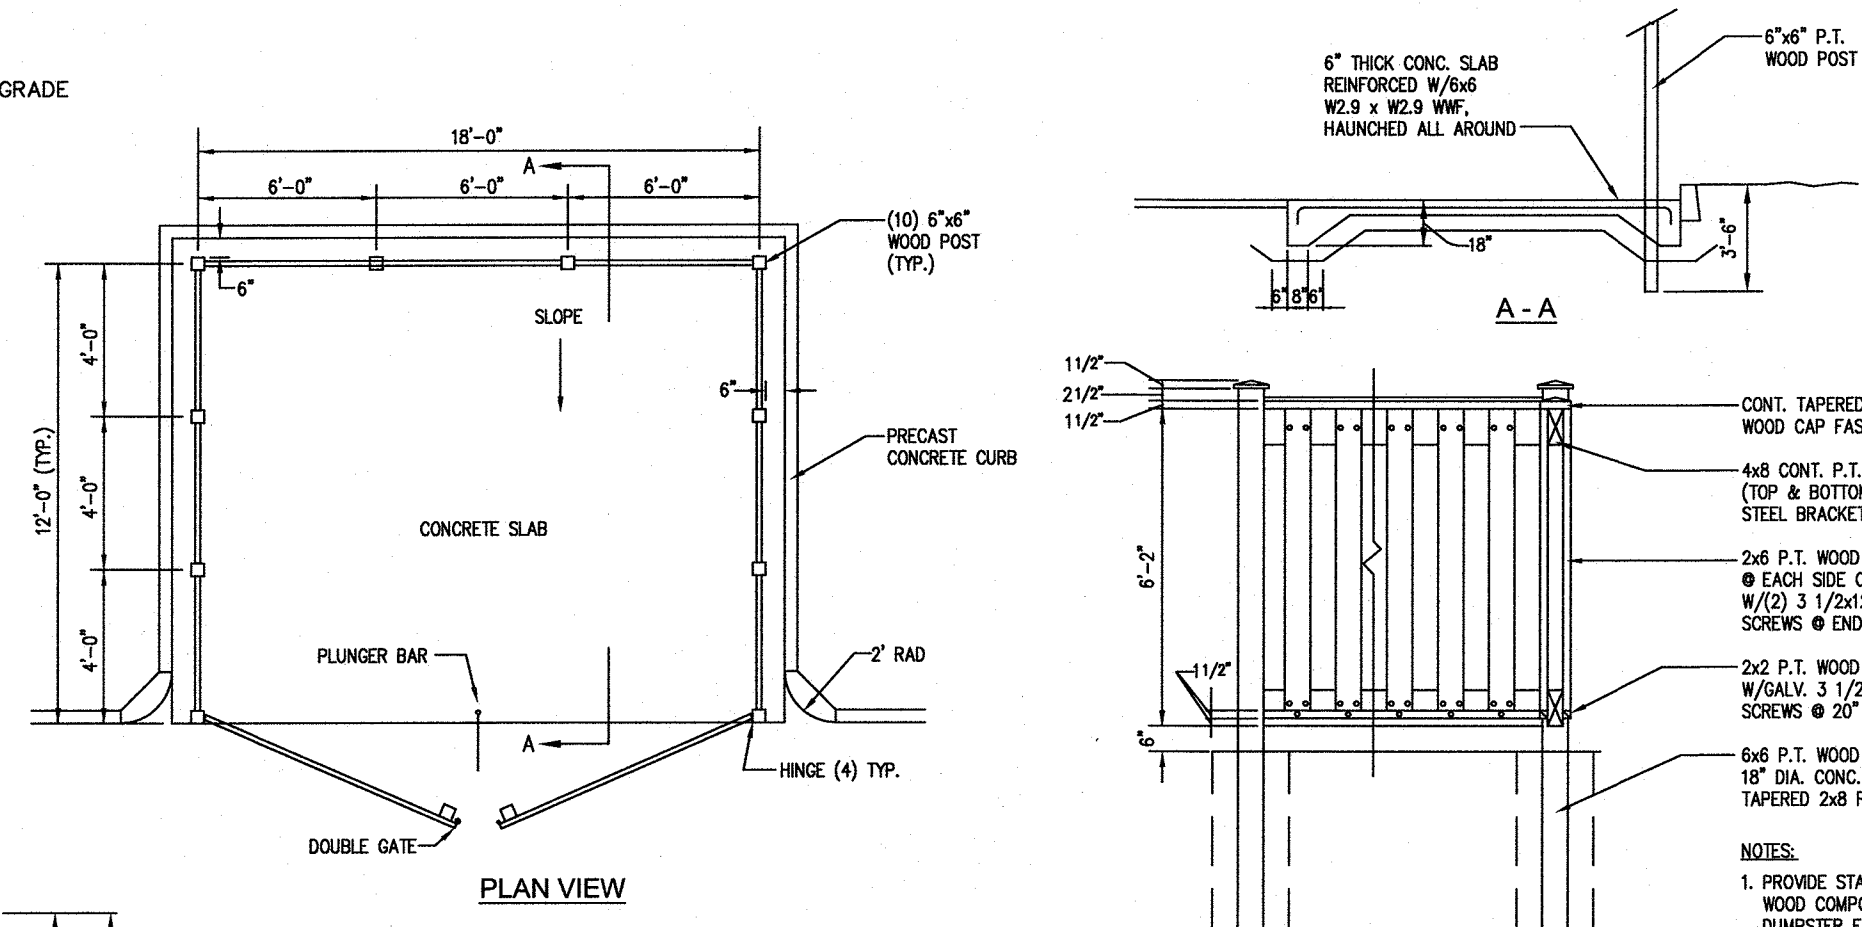

DUMPSTER PAD ENCLOSURE
NOT TO SCALE

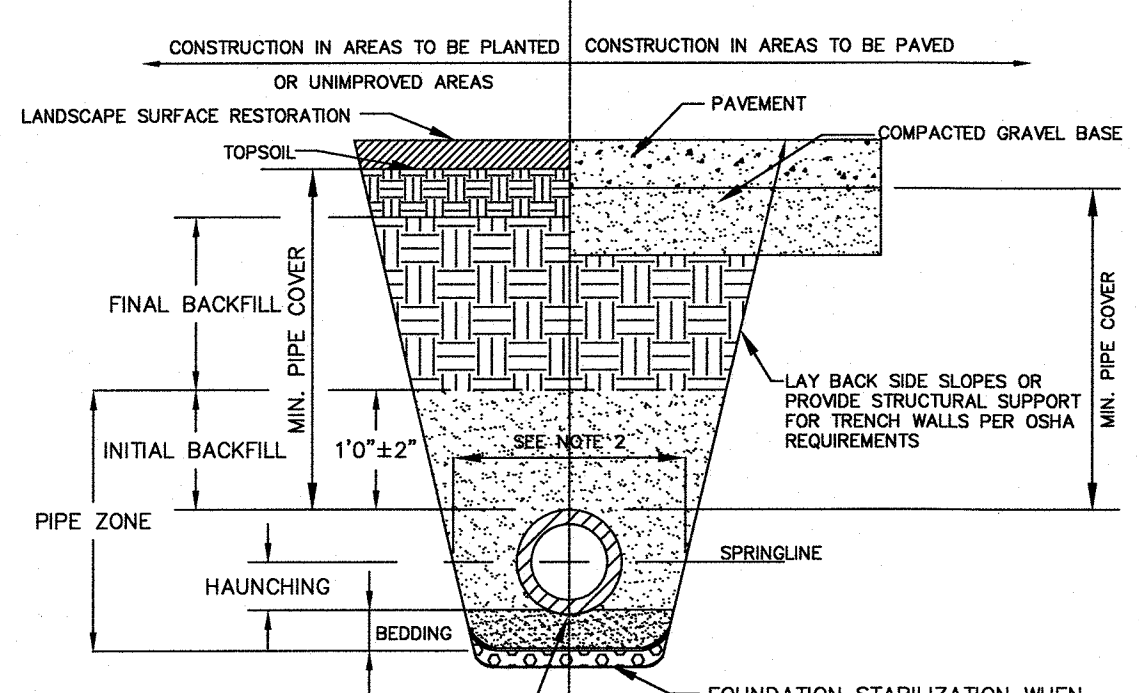


UTILITY TRENCH
NOT TO SCALE


FOUNDATION, BEDDING AND BACKFILL MATERIALS	NO. P.C.	RC. DI.
FOUNDATION STABILIZATION	[6]	[6]
BEDDING	[1]	[1]
HAUNCHING	[1]	[1]
INITIAL BACKFILL	[4]	[4]
FINAL BACKFILL	[4]	[4]
PIPE SLOPE	[5]	[5]

PIPE I.D.	WIDTH
LESS THAN 21"	O.D. + 12"
21" TO 42"	O.D. + 24"
GREATER THAN 42"	O.D. + 30"


- [1] PLACE 3/4" MINUS GRADED GRANULAR BACKFILL AT OPTIMUM MOISTURE IN HORIZONTAL 8" DEEP LOOSE LAYERS, COMPACT TO 95% PER ASTM D-1557
- [2] MINIMUM WIDTH OF TRENCH MEASURED AT SPRINGLINE OF PIPE, INCLUDING ANY NECESSARY SHEATHING
- [3] INSTALL PIPE IN CENTER OF TRENCH.
- [4] IN PLANTED OR UNIMPROVED AREAS, USE ON-SITE EXCAVATED MATERIAL FOR FINAL BACKFILL. COMPACT TO 95% PER ASTM D-1557 IN PAVED AREAS. OBTAIN ENGINEER APPROVAL OF ON-SITE EXCAVATED MATERIALS FOR USE AS FINAL BACKFILL.
- [5] MINIMUM COVER OVER TOP OF PIPE
- [6] FOR FOUNDATION STABILIZATION, USE 2" MINUS CRUSHED STONE

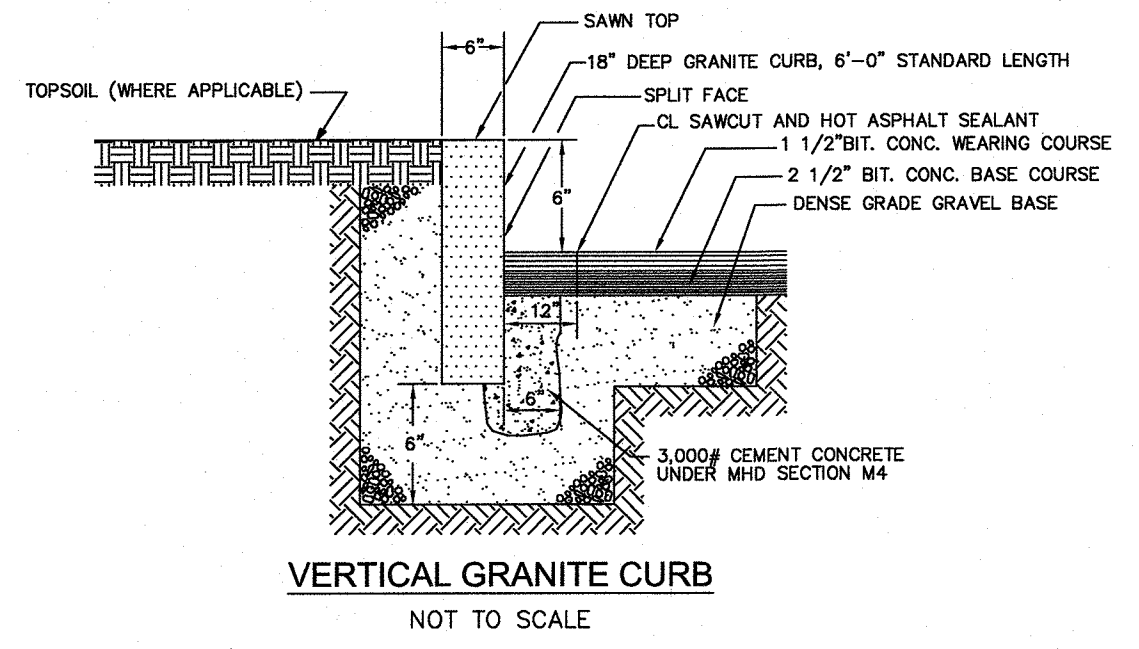


VERTICAL GRANITE CURB
NOT TO SCALE

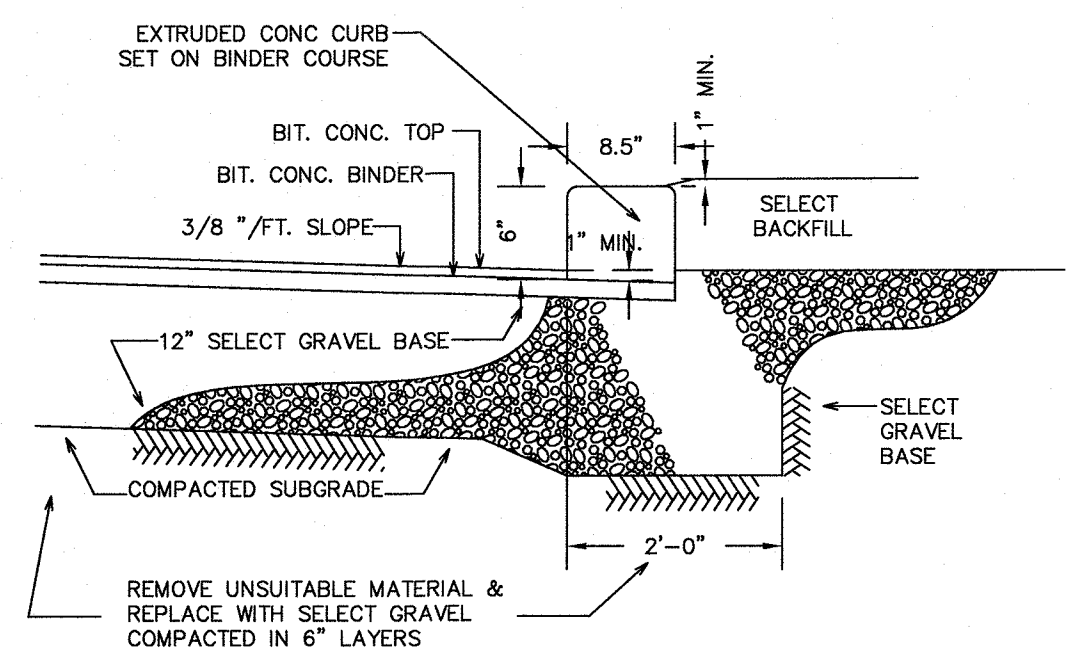


CLEANOUT AT GRADE
NOT TO SCALE

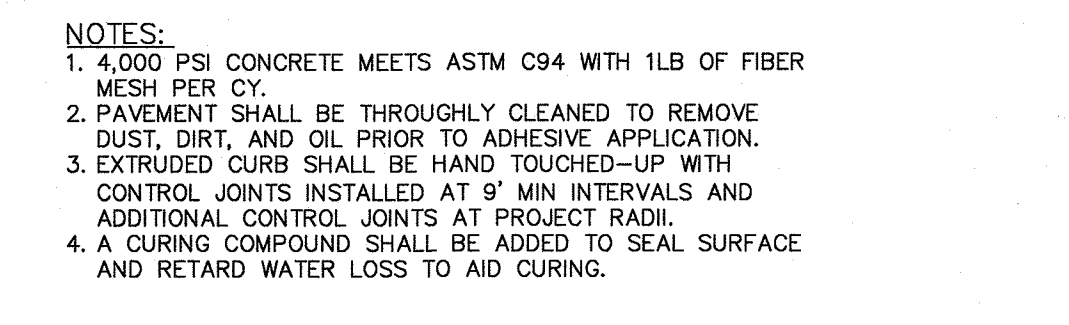

EXTRUDED CONC CURB
NOT TO SCALE

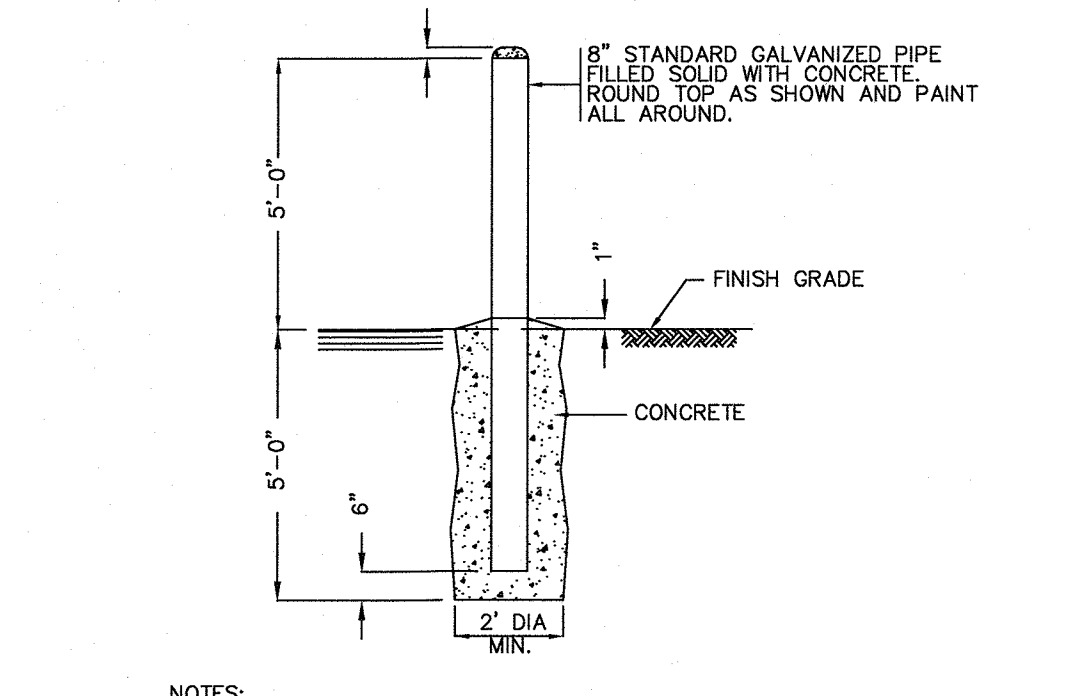

STEEL PIPE BOLLARD
NOT TO SCALE

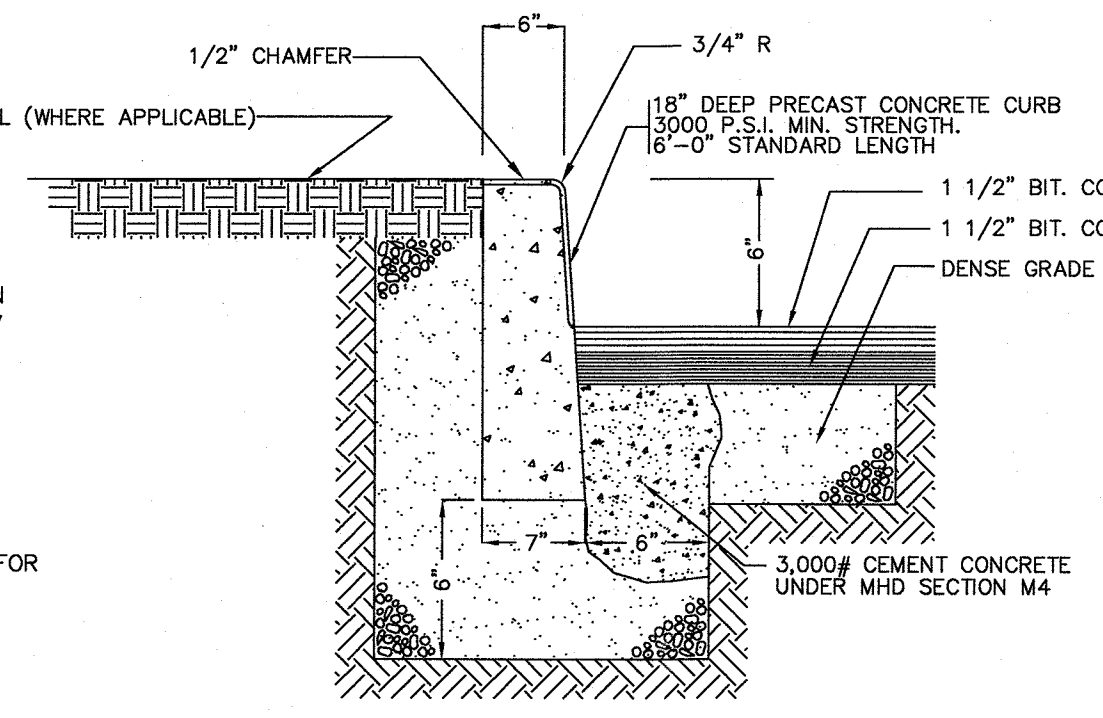


PRECAST CONCRETE CURB
NOT TO SCALE

Not For Construction

WARNING:
Joe The Architect, Inc., all drawings and written material herein constitute the original and copyrighted work of the architect. Contractors to use Architectural drawings for set out. Contractors to check and verify all dimensions on site prior to Construction/Installation. Pinned Dimensions take precedence over Scaled Dimensions. Any discrepancies should be immediately referred to the Architect. The project manager shall be notified in writing of any discrepancies prior to proceeding with the work. The scale of drawings may change when copied or leased. All work to comply with I.B.C. Regulations and relevant American Standards.
© 2019 - all rights reserved

consultant / contractor information:

LEVEL
DESIGN GROUP
CIVIL ENGINEERING / LAND SURVEYING
249 SOUTH STREET
PLAINVILLE, MA 02762
TEL. (508) 685-2211 FAX. (508) 685-2219

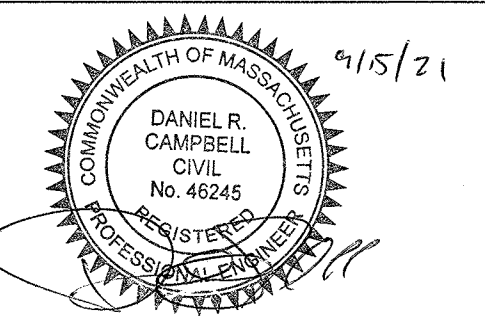

revision	revision description	date
1	COMMENT RESPONSE	9-15-2021

project title:
FACTORY SQUARE FRANKLIN

5 FISHER STREET, FRANKLIN, MA 02038

client information:
K FISHER STREET LLC


1 FISHER STREET, FRANKLIN, MA 02038

J t A


JOE THE ARCHITECT
343 Medford Street, Suite 4C Scituate, MA 02545
t: (617) 764-3553 e: as@joethearchitect.com
www.joethearchitect.com

drawing title	drawing scale	approver
TYPICAL DETAILS	AS SHOWN	


drawing number: **C-4.0**

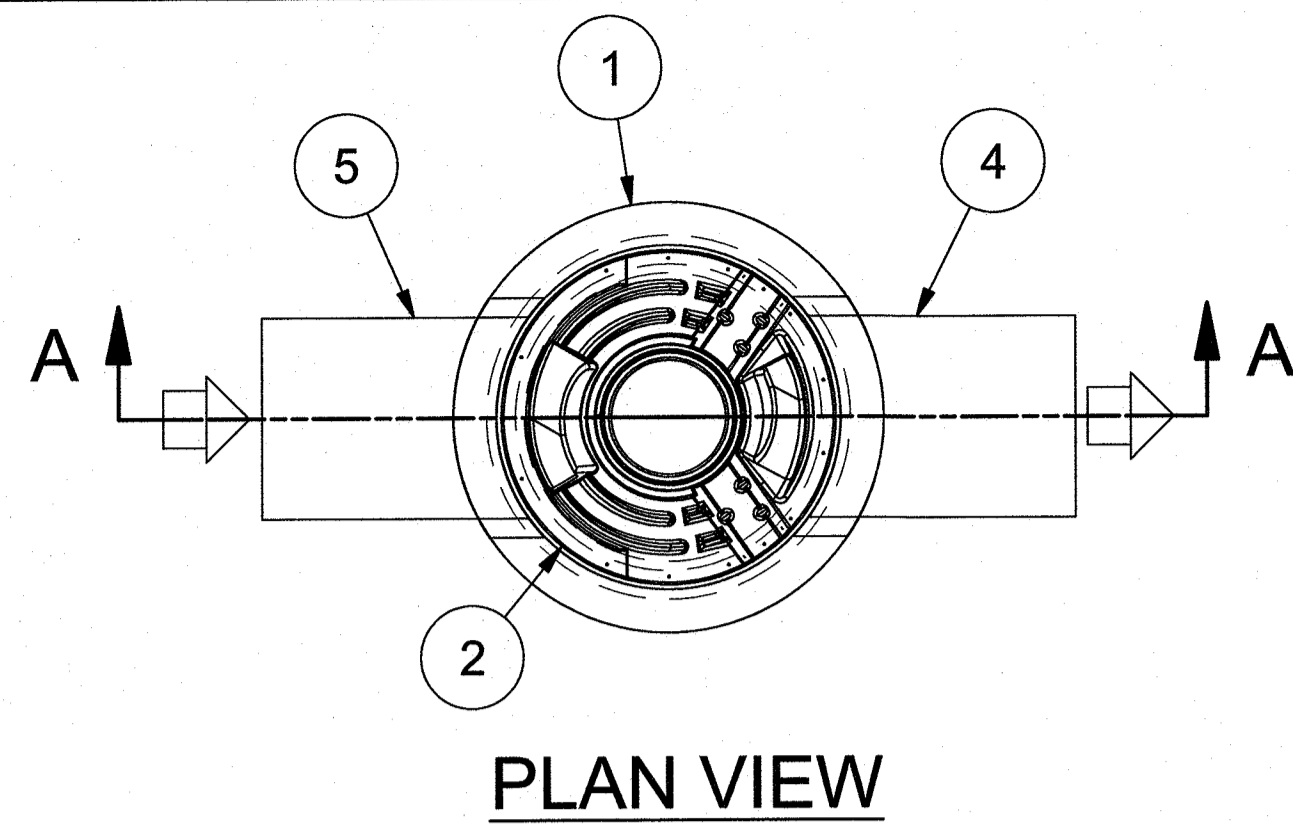

PLAN VIEW

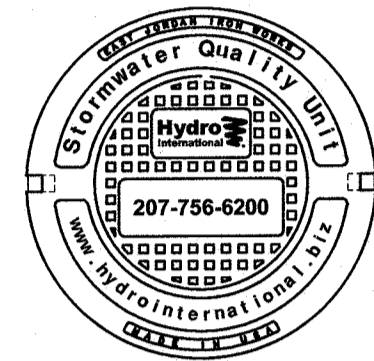

HYDRO FRAME AND COVER (INCLUDED)
GRADE RINGS BY OTHERS AS REQUIRED

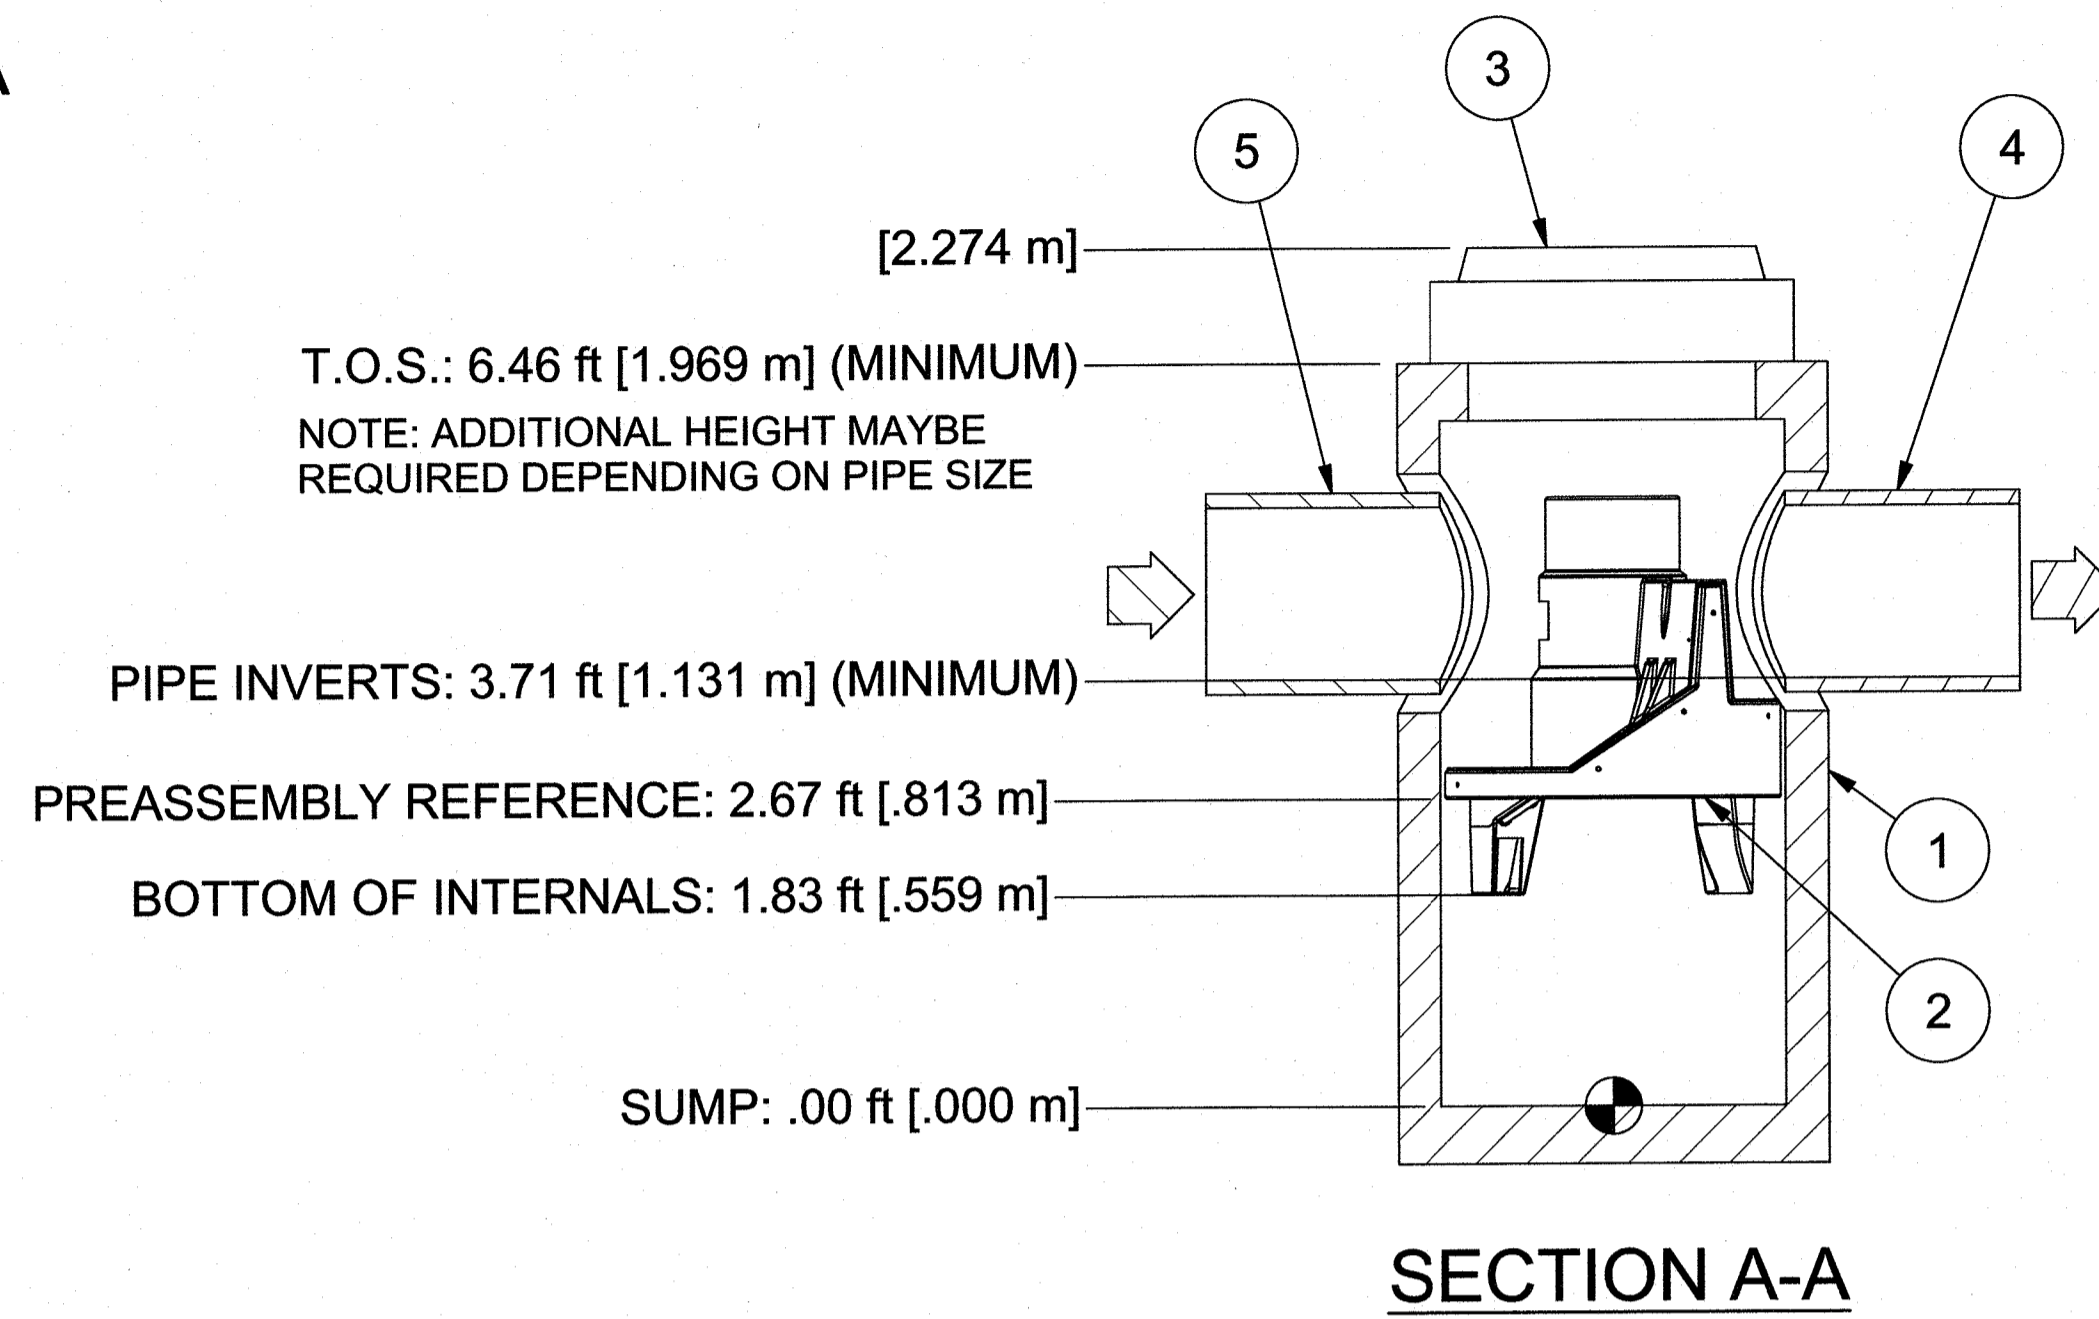

SECTION A-A

1. MANHOLE WALL AND SLAB THICKNESSES ARE NOT TO SCALE.
2. CONTACT HYDRO INTERNATIONAL FOR A BOTTOM OF STRUCTURE ELEVATION PRIOR TO SETTING FIRST DEFENSE MANHOLE.
3. CONTRACTOR TO CONFIRM RIM, PIPE INVERTS, PIPE DIA. AND PIPE ORIENTATION PRIOR TO RELEASE OF UNIT TO FABRICATION.

T.O.S.: 6.46 ft [1.969 m] (MINIMUM)
NOTE: ADDITIONAL HEIGHT MAYBE REQUIRED DEPENDING ON PIPE SIZE

PIPE INVERTS: 3.71 ft [1.131 m] (MINIMUM)

PREASSEMBLY REFERENCE: 2.67 ft [.813 m]

BOTTOM OF INTERNALS: 1.83 ft [.559 m]


SUMP: .00 ft [.000 m]

PRODUCT SPECIFICATION:

1. PEAK HYDRAULIC FLOW: 15.0 cfs (424 l/s)
2. MIN SEDIMENT STORAGE CAPACITY: 0.4 cu. yd. (0.3 cu. m.)
3. OIL STORAGE CAPACITY: 125 gal. (473 liters)
4. MAXIMUM INLET/OUTLET PIPE DIAMETERS: 18 in. (450 mm)
5. THE TREATMENT SYSTEM SHALL USE AN INDUCED VORTEX TO SEPARATE POLLUTANTS FROM STORMWATER RUNOFF.
6. FOR MORE PRODUCT INFORMATION INCLUDING REGULATORY ACCEPTANCES, PLEASE VISIT <https://hydro-int.com/en/products/first-defense>

GENERAL NOTES:

1. General Arrangement drawings only. Contact Hydro International for site specific drawings.
2. The diameter of the inlet and outlet pipes may be no more than 18".
3. Multiple inlet pipes possible (refer to project plan).
4. Inlet/outlet pipe angle can vary to align with drainage network (refer to project plan.s)
5. Peak flow rate and minimum height limited by available cover and pipe diameter.
6. Larger sediment storage capacity may be provided with a deeper sump depth.

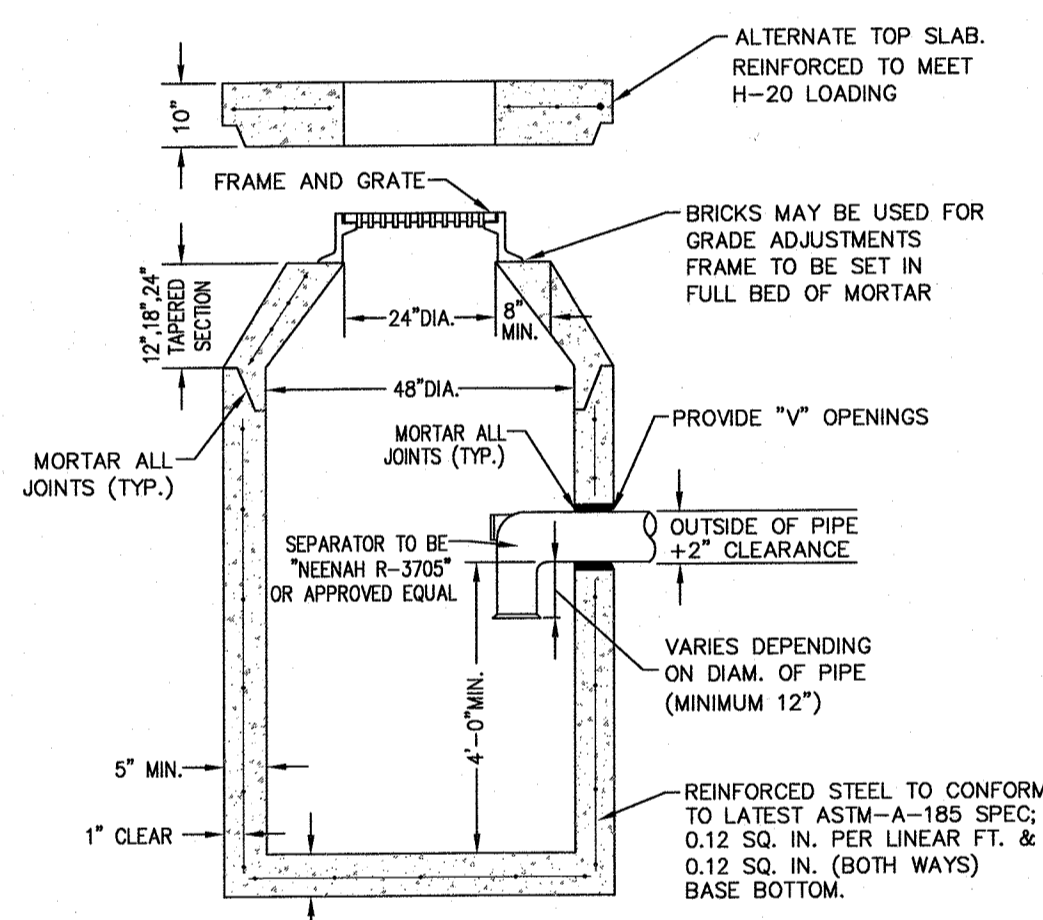

STANDARD MANHOLE FRAME & COVER

NOT TO SCALE


NOTES:

1. STANDARD COVER MIN. WEIGHT 200 LBS.
2. TYPE-A FRAME MIN. WEIGHT 285 LBS. MATERIAL—CAST IRON
3. STAMPED TO READ "DRAIN" FOR DRAIN MANHOLE INSTALLATION & "SEWER" FOR SEWER MANHOLE INSTALLATION

- NOTES:**
1. CONCRETE TO BE 4,000 PSI MIN. PER ASTM C-478(6.1).
 2. REINFORCING TO MEET OR EXCEED H-20 LOADING REQUIREMENTS.

PRECAST CONCRETE CATCH BASIN WITH GAS AND OIL SEPARATOR


NOT TO SCALE

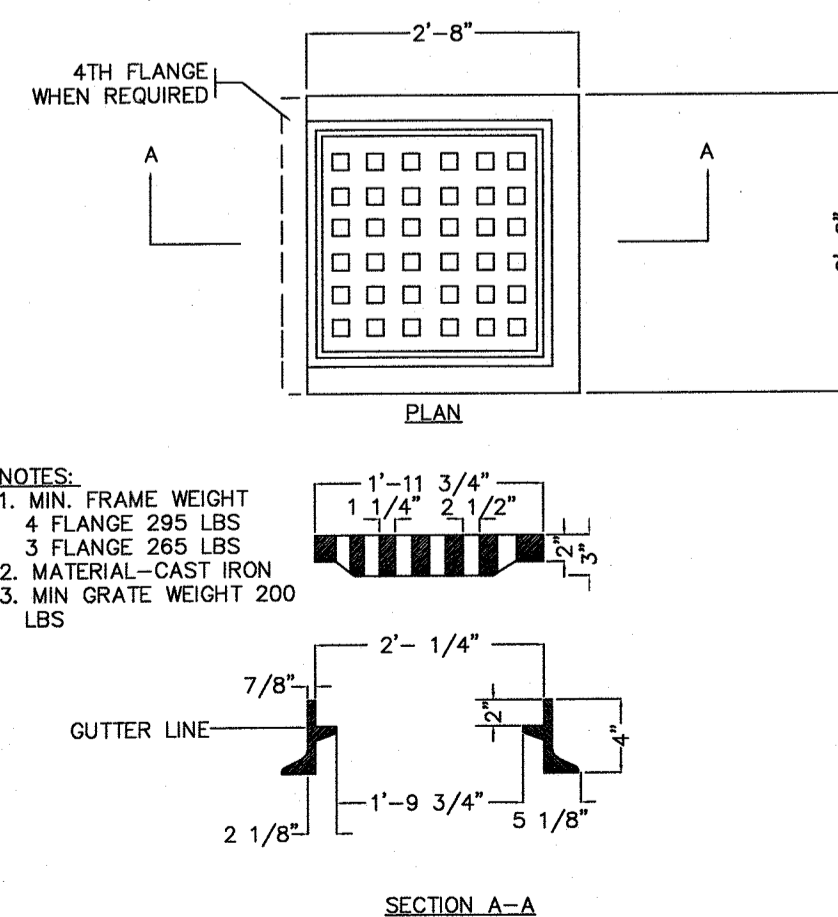

STANDARD CATCH BASIN FRAME & GRATE


NOT TO SCALE

- NOTES:**
1. MIN. FRAME WEIGHT 4 FLANGE 285 LBS
 2. MATERIAL—CAST IRON
 3. MIN. GRADE WEIGHT 200 LBS

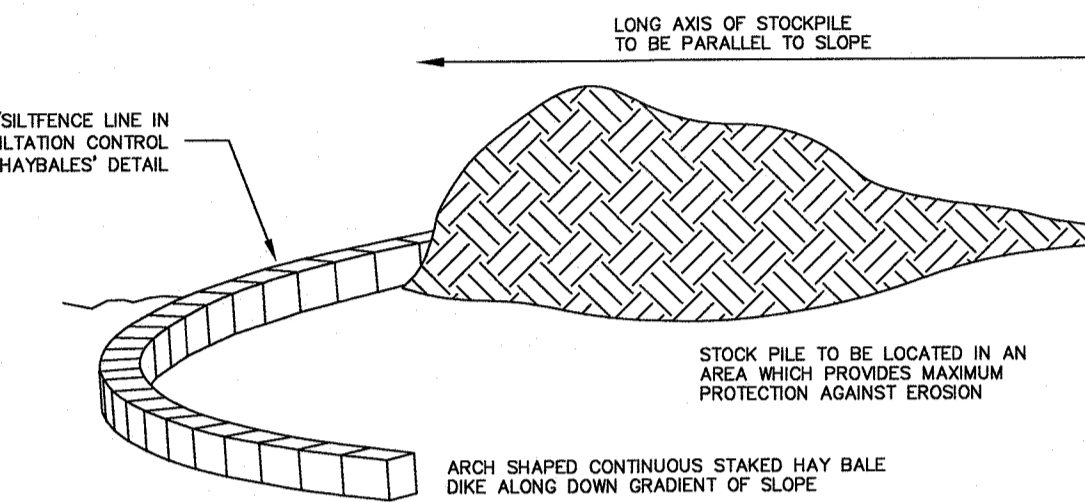


TEMPORARY MATERIAL STOCKPILE

NOT TO SCALE

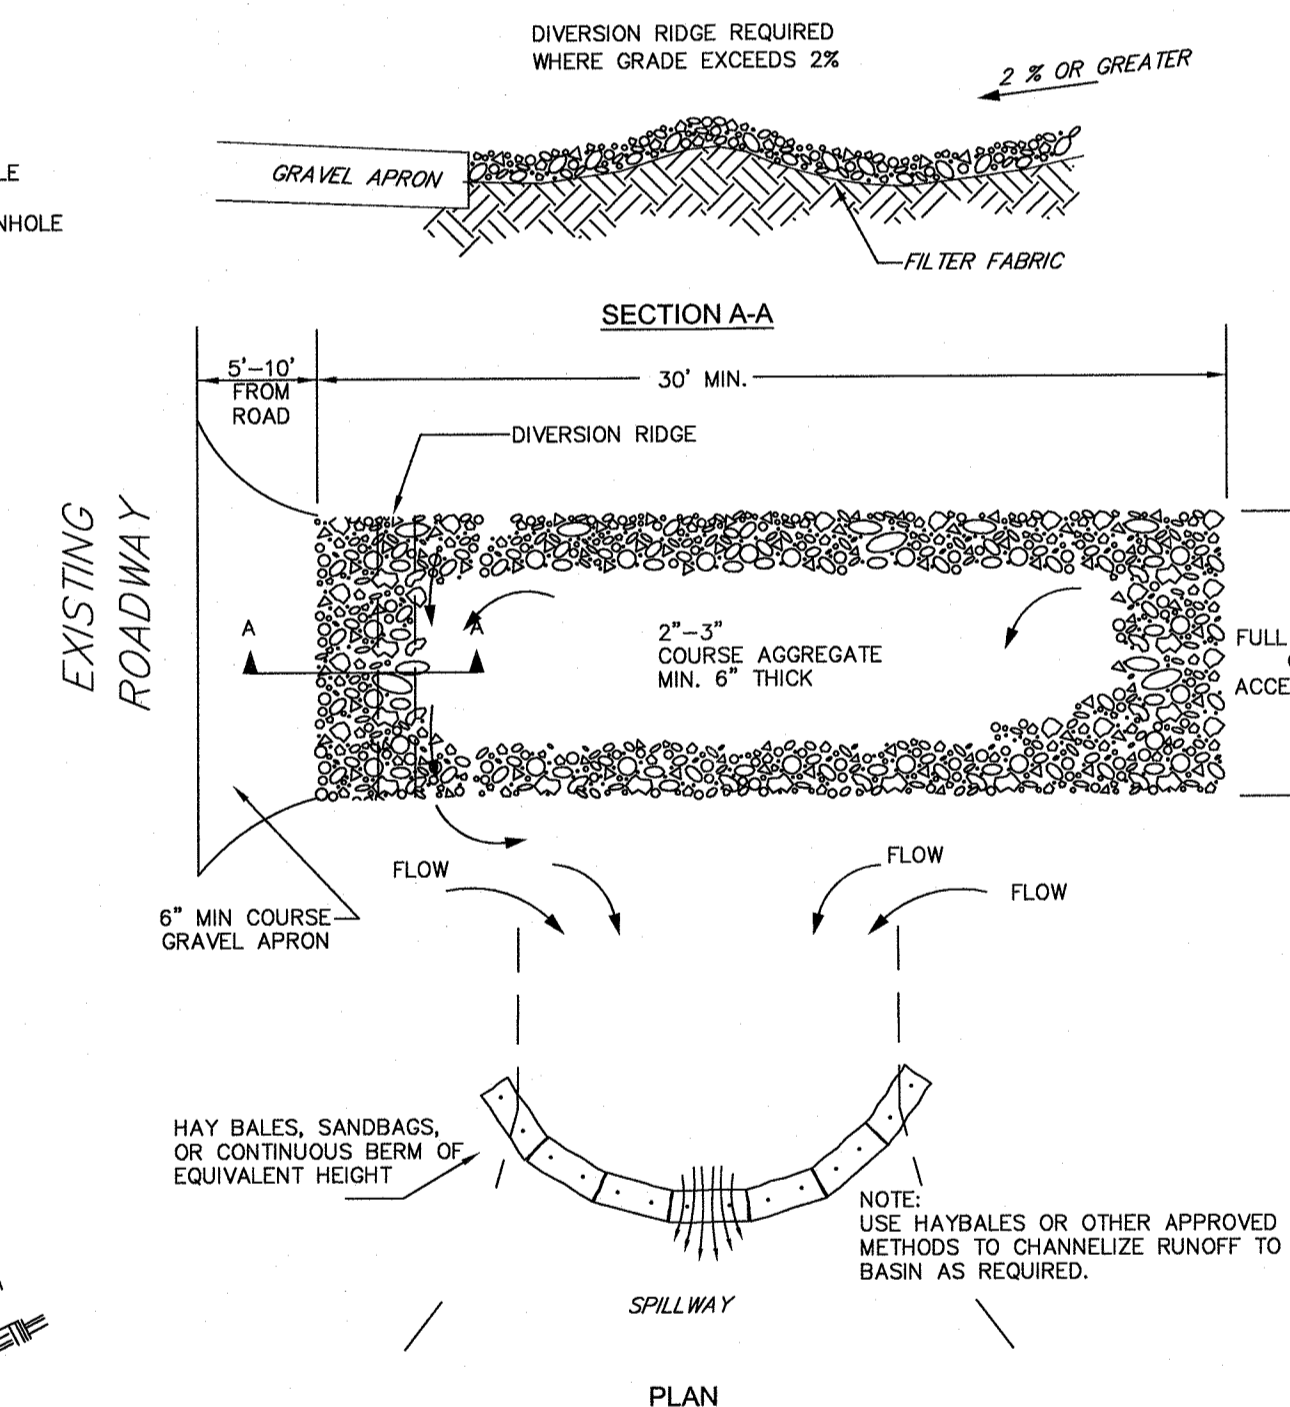

PLACEMENT OF STRAW BALE EROSION CHECK

NOT TO SCALE

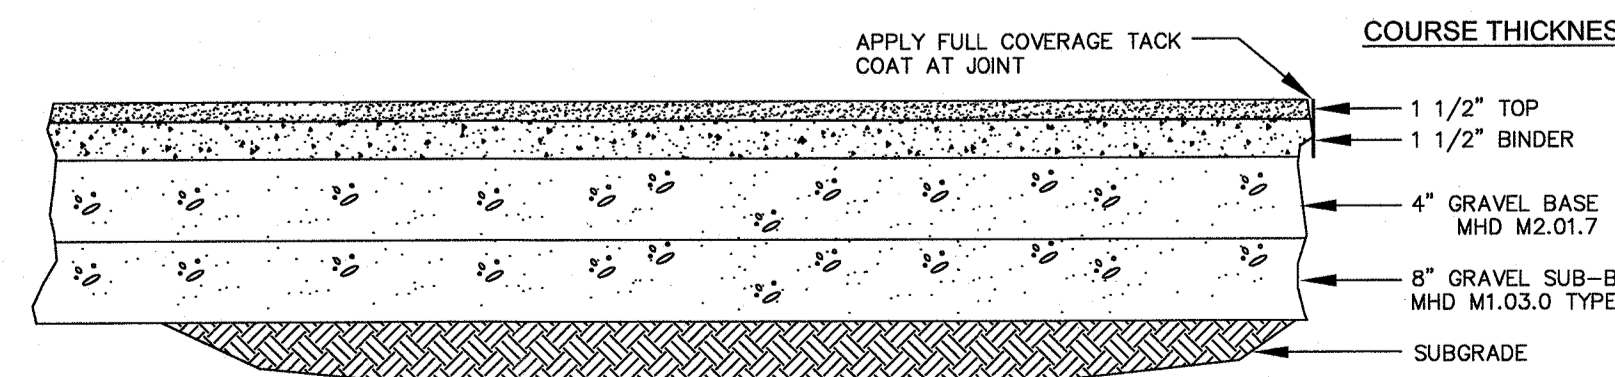

AUTOMOTIVE AREAS - BITUMINOUS CONCRETE PAVEMENT

NOT TO SCALE


TEMPORARY CONSTRUCTION ENTRANCE/EXIT DETAIL

NOT TO SCALE

- NOTES:**
1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITIONS THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHT-OF-WAYS. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT.
 2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTRANCE ONTO PUBLIC RIGHT-OF-WAY.
 3. WHEN WASHING IS REQUIRED IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE WHICH DRAINS TO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASIN.


COURSE THICKNESS

- 1 1/2" TOP
- 1 1/2" BINDER
- 4" GRAVEL BASE MHD M2.01.7
- 8" GRAVEL SUB-BASE MHD M1.03.0 TYPE B
- SUBGRADE

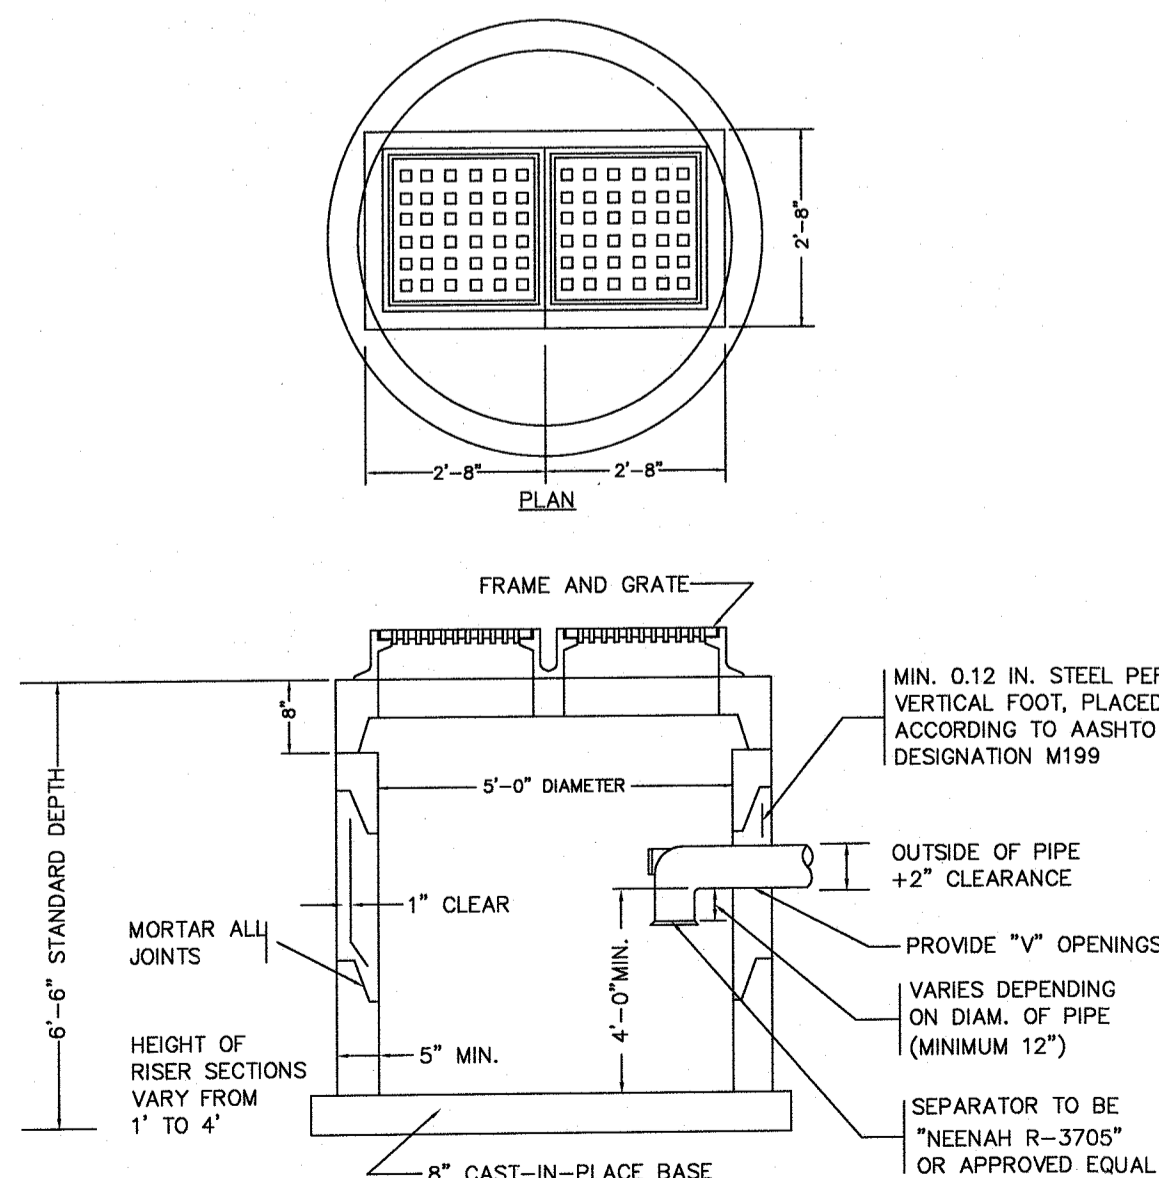

PRECAST CONCRETE DOUBLE CATCH BASIN WITH GAS AND OIL SEPARATOR

NOT TO SCALE

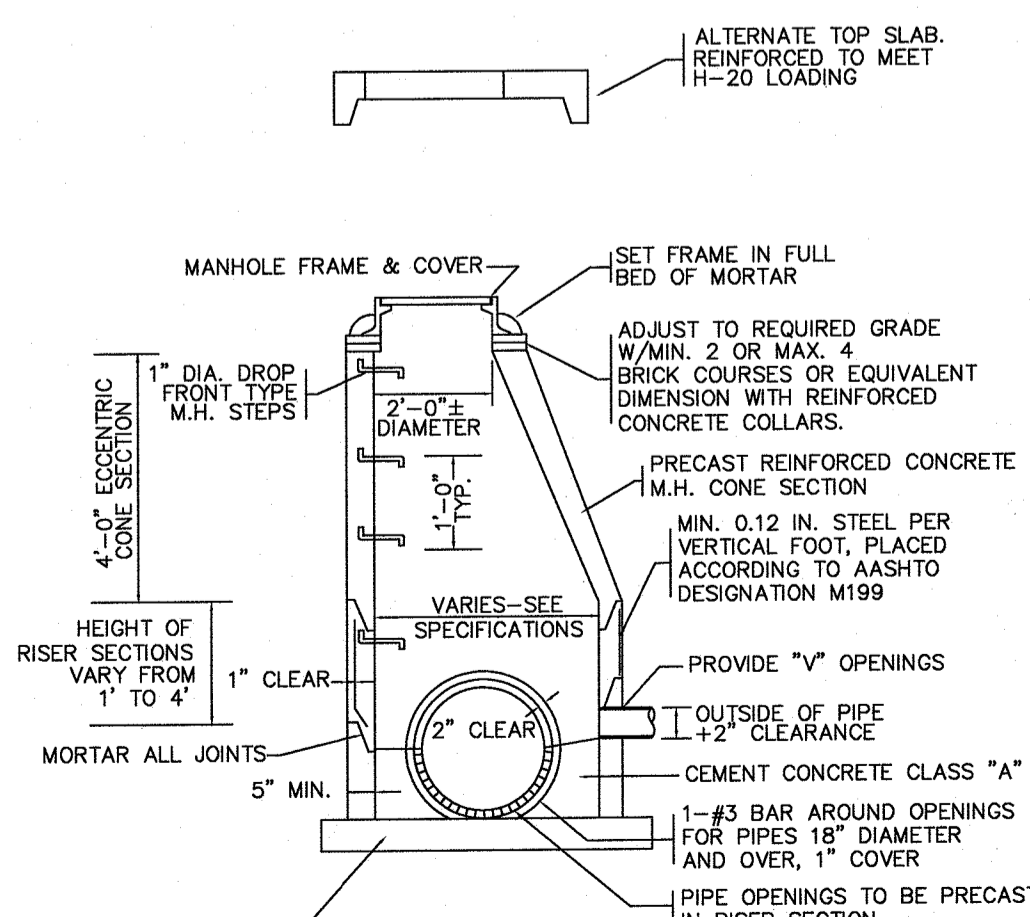


PRECAST CONCRETE DRAIN MANHOLE

NOT TO SCALE

Not For Construction

WARNING: Use The Architect, Inc., all drawings and written material herein constitute the original and unpublished work of the architect, and the same may not be duplicated, used, or disclosed without the written consent of the architect. Contractors to use Architectural drawings for set out. Contractors to check and verify all Dimensions on Site prior to Construction. Fabrication. Fugate Dimensions take precedence over Scale Dimensions. Any discrepancies should be immediately referred to the Architect. The project manager shall be notified in writing of any discrepancies prior to proceeding with the work. The scale of drawings may change when copied or filed. All work to comply with U.S.C. Regulations and relevant American Standards. © 2019 - all rights reserved.

consultant / contractor information:

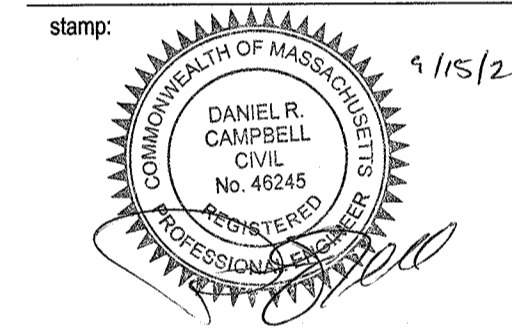

revision	revision description	date
1	COMMENT RESPONSE	9-15-2021

project title:
FACTORY SQUARE FRANKLIN

5 FISHER STREET, FRANKLIN, MA 02038

client information:
K FISHER STREET LLC


1 FISHER STREET, FRANKLIN, MA 02038



JOE THE ARCHITECT
343 Medford Street, Suite 4C Somerville, MA 02145
t: +1(617) 764-3593 e: askjoe@joethearchitect.com
www.joethearchitect.com


drawing title
TYPICAL DETAILS

project number	drawing scale	approver
1899.00	AS SHOWN	
drawing number	revision	
C-4.1		

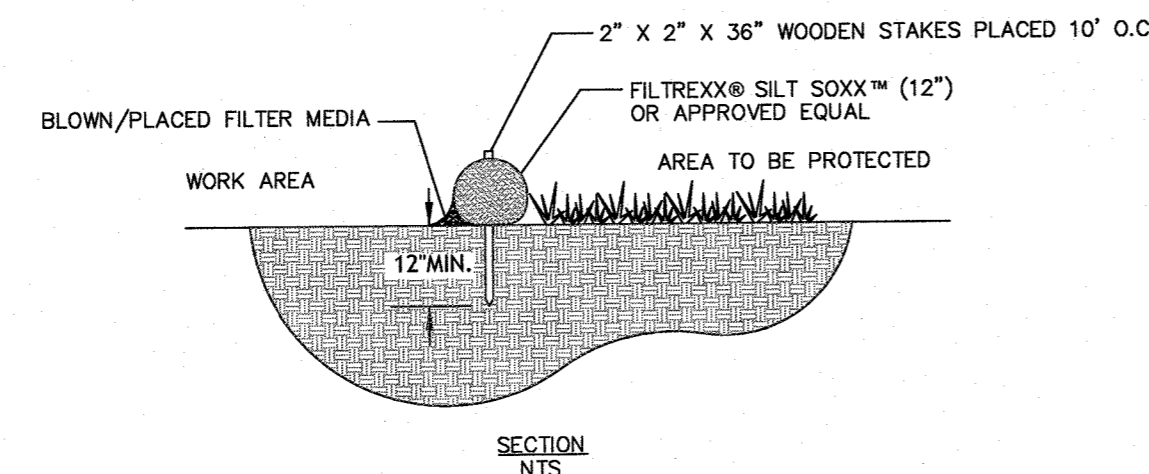


- NOTES:**
1. ALL MATERIAL TO MEET FILTREXX® SPECIFICATIONS.
 2. SILT SOXX™ FILL TO MEET APPLICATION REQUIREMENTS.
 3. COMPOST MATERIAL TO BE DISPERSED ON SITE.

FILTREXX SILT SOXX
NOT TO SCALE

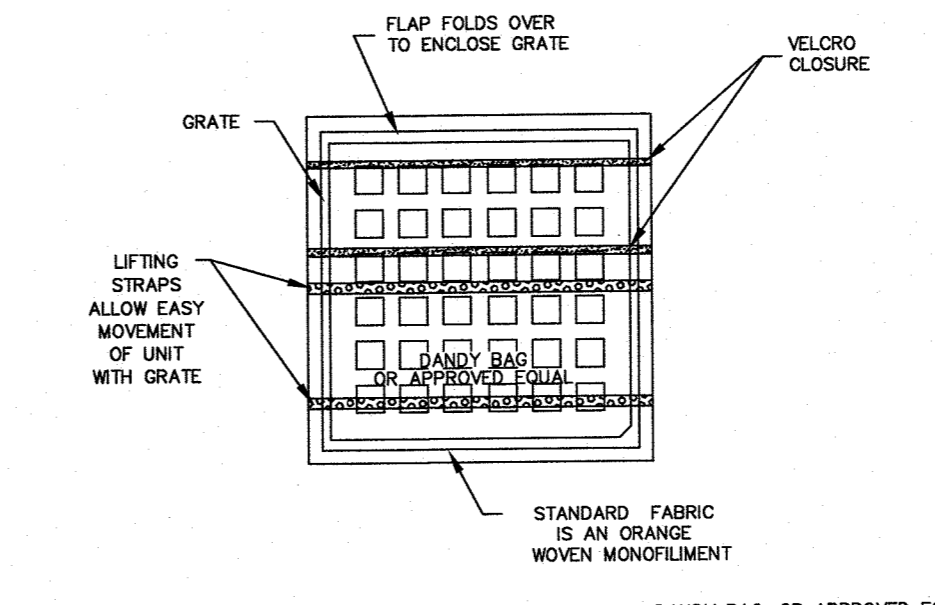


- NOTES:**
- INSTALLATION:** THE EMPTY DANDY BAG, OR APPROVED EQUAL, SHOULD BE PLACED OVER THE GRATE AS THE GRATE STANDS ON END. IF USING OPTIONAL OIL ABSORBENTS, PLACE ABSORBENT PILLOW IN POUCH ON THE BOTTOM (BELOW-GRADE SIDE) OF THE UNIT. ATTACH ABSORBENT PILLOW TO TETHER LOOP. TUCK THE ENCLOSURE FLAP INSIDE TO COMPLETELY ENCLOSE THE GRATE. HOLDING THE LIFTING DEVICES (DO NOT REST ON LIFTING DEVICES TO SUPPORT THE ENTIRE WEIGHT OF THE GRATE), PLACE THE GRATE INTO ITS FRAME.
- MAINTENANCE:** REMOVE ALL ACCUMULATED SEDIMENT AND DEBRIS FROM SURFACE AND VICINITY OF UNIT AFTER EACH STORM EVENT. REMOVE SEDIMENT THAT HAS ACCUMULATED WITHIN THE CONTAINMENT AREA OF THE DANDY BAG AS NEEDED. IF USING OPTIONAL OIL ABSORBENTS, REMOVE AND REPLACE ABSORBENT PILLOW WHEN NEAR SATURATION.


CATCH BASIN INLET PROTECTION
NOT TO SCALE

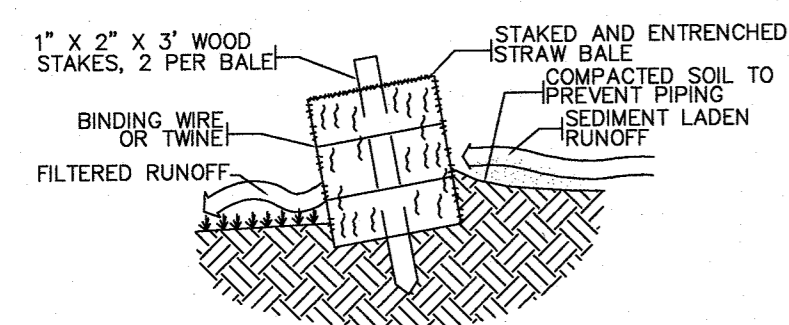

**CROSS-SECTION OF STRAW BALE
EROSION CHECK**
NOT TO SCALE

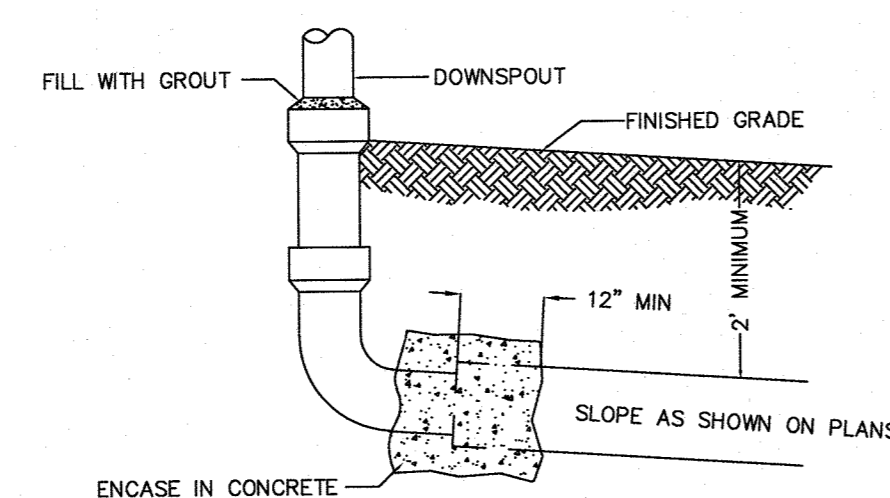

DOWNSPOUT CONNECTION TO DRAINAGE OUTLET
NOT TO SCALE

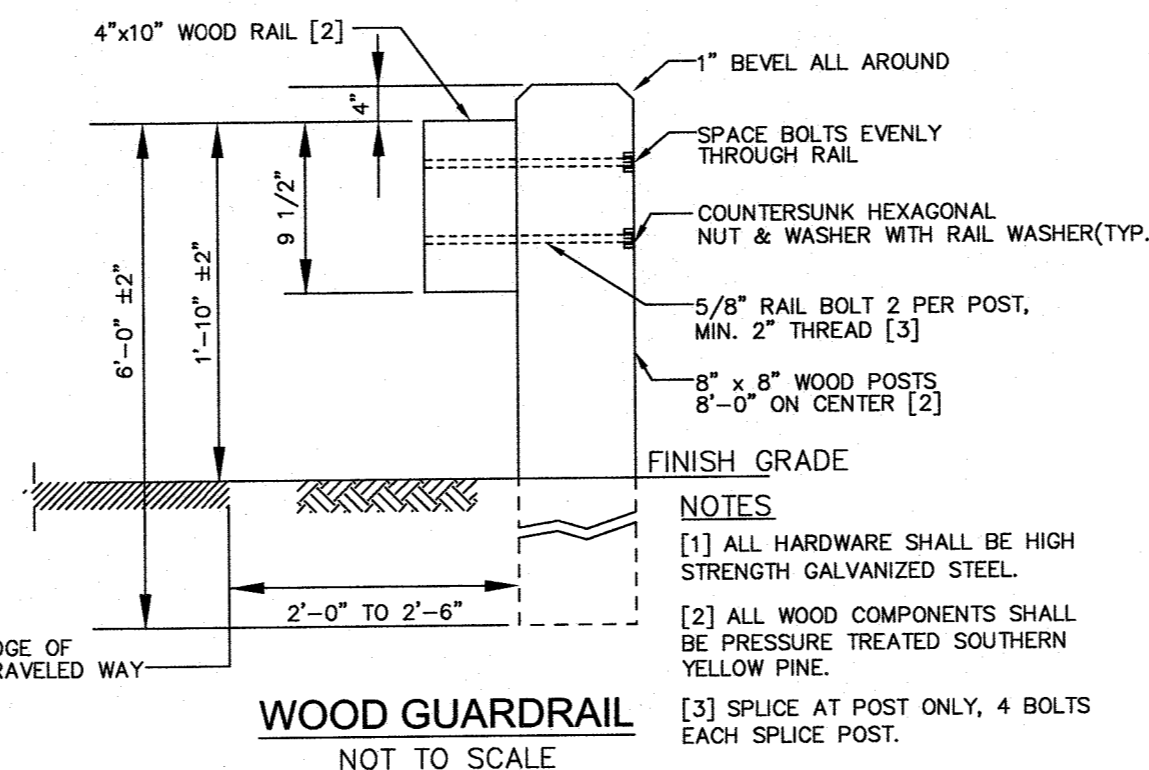

WOOD GUARDRAIL
NOT TO SCALE

SC-740 STORMTECH CHAMBER SPECIFICATIONS

1. CHAMBERS SHALL BE STORMTECH SC-740.
2. CHAMBERS SHALL BE ARCH-SHAPED AND SHALL BE MANUFACTURED FROM VIRGIN, IMPACT-MODIFIED POLYPROPYLENE OR POLYETHYLENE COPOLYMERS.
3. CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F2922 (POLETHYLENE) OR ASTM F2418-16a (POLYPROPYLENE), "STANDARD SPECIFICATION FOR CORRUGATED WALL STORMWATER COLLECTION CHAMBERS".
4. CHAMBER ROWS SHALL PROVIDE CONTINUOUS, UNOBSTRUCTED INTERNAL SPACE WITH NO INTERNAL SUPPORTS THAT WOULD IMPEDE FLOW OR LIMIT ACCESS FOR INSPECTION.
5. THE STRUCTURAL DESIGN OF THE CHAMBERS, THE STRUCTURAL BACKFILL, AND THE INSTALLATION REQUIREMENTS SHALL ENSURE THAT THE LOAD FACTORS SPECIFIED IN THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, SECTION 12.12, ARE MET FOR: 1) LONG-DURATION DEAD LOADS AND 2) SHORT-DURATION LIVE LOADS, BASED ON THE AASHTO DESIGN TRUCK WITH CONSIDERATION FOR IMPACT AND MULTIPLE VEHICLE PRESENCES.
6. CHAMBERS SHALL BE DESIGNED, TESTED AND ALLOWABLE LOAD CONFIGURATIONS DETERMINED IN ACCORDANCE WITH ASTM F2787, "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". LOAD CONFIGURATIONS SHALL INCLUDE: 1) INSTANTANEOUS (1 MIN) AASHTO DESIGN TRUCK LIVE LOAD ON MINIMUM COVER 2) MAXIMUM PERMANENT (75-YR) COVER LOAD AND 3) ALLOWABLE COVER WITH PARKED (1-WEEK) AASHTO DESIGN TRUCK.
7. REQUIREMENTS FOR HANDLING AND INSTALLATION:
 - TO MAINTAIN THE WIDTH OF CHAMBERS DURING SHIPPING AND HANDLING, CHAMBERS SHALL HAVE INTEGRAL, INTERLOCKING STACKING LUGS.
 - TO ENSURE A SECURE JOINT DURING INSTALLATION AND BACKFILL, THE HEIGHT OF THE CHAMBER JOINT SHALL NOT BE LESS THAN 2".
 - TO ENSURE THE INTEGRITY OF THE ARCH SHAPE DURING INSTALLATION, a) THE ARCH STIFFNESS CONSTANT AS DEFINED IN SECTION 6.2.8 OF ASTM F2922 SHALL BE GREATER THAN OR EQUAL TO 400 LBS/IN. AND b) TO RESIST CHAMBER DEFORMATION DURING INSTALLATION AT ELEVATED TEMPERATURES (ABOVE 73° F / 23° C), CHAMBERS SHALL BE PRODUCED FROM REFLECTIVE GOLD OR YELLOW COLORS.
8. ONLY CHAMBERS THAT ARE APPROVED BY THE SITE DESIGN ENGINEER WILL BE ALLOWED. UPON REQUEST BY THE SITE DESIGN ENGINEER OR OWNER, THE CHAMBER MANUFACTURER SHALL SUBMIT A STRUCTURAL EVALUATION FOR APPROVAL BEFORE DELIVERING CHAMBERS TO THE PROJECT SITE AS FOLLOWS:
 - THE STRUCTURAL EVALUATION SHALL BE SEALED BY A REGISTERED PROFESSIONAL ENGINEER.
 - THE STRUCTURAL EVALUATION SHALL DEMONSTRATE THAT THE SAFETY FACTORS ARE GREATER THAN OR EQUAL TO 1.95 FOR DEAD LOAD AND 1.75 FOR LIVE LOAD, THE MINIMUM REQUIRED BY ASTM F2787 AND BY SECTIONS 3 AND 12.12 OF THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS FOR THERMOPLASTIC PIPE.
 - THE TEST DERIVED MODULUS AS SPECIFIED IN ASTM F2922 SHALL BE USED FOR PERMANENT DEAD LOAD DESIGN EXCEPT THAT IT SHALL BE THE 75-YEAR MODULUS USED FOR DESIGN.
9. CHAMBERS AND END CAPS SHALL BE PRODUCED AT AN ISO 9001 CERTIFIED MANUFACTURING FACILITY.

ACCEPTABLE FILL MATERIALS: STORMTECH SC-740 CHAMBER SYSTEMS

MATERIAL LOCATION	DESCRIPTION	AASHTO MATERIAL CLASSIFICATIONS	COMPACTION / DENSITY REQUIREMENT
D	FINAL FILL: FILL MATERIAL FOR LAYER 'D' STARTS FROM THE TOP OF THE 'C' LAYER TO THE BOTTOM OF FLEXIBLE PAVEMENT OR UNPAVED FINISHED GRADE ABOVE. NOTE THAT PAVEMENT SUBBASE MAY BE PART OF THE 'D' LAYER.	N/A	PREPARE PER SITE DESIGN ENGINEER'S PLANS. PAVED INSTALLATIONS MAY HAVE STRINGENT MATERIAL AND PREPARATION REQUIREMENTS.
C	INITIAL FILL: FILL MATERIAL FOR LAYER 'C' STARTS FROM THE TOP OF THE EMBEDMENT STONE ('B' LAYER) TO 18" (450 mm) ABOVE THE TOP OF THE CHAMBER. NOTE THAT PAVEMENT SUBBASE MAY BE A PART OF THE 'C' LAYER.	GRANULAR WELL-GRADED SOIL/AGGREGATE MIXTURES, <35% FINES OR PROCESSED AGGREGATE. OR AASHTO M43 ¹	BEGIN COMPACTIONS AFTER 12" (300 mm) OF MATERIAL OVER THE CHAMBERS IS REACHED. COMPACT ADDITIONAL LAYERS IN 6" (150 mm) MAX LIFTS TO A MIN. 95% PROCTOR DENSITY FOR WELL GRADED MATERIAL AND 95% RELATIVE DENSITY FOR PROCESSED AGGREGATE MATERIALS. ROLLER GROSS VEHICLE WEIGHT NOT TO EXCEED 12,000 lbs (53 kN). DYNAMIC FORCE NOT TO EXCEED 20,000 lbs (89 kN).
B	EMBEDMENT STONE: FILL SURROUNDING THE CHAMBERS FROM THE FOUNDATION STONE ('A' LAYER) TO THE 'C' LAYER ABOVE.	AASHTO M43 ¹ 3, 357, 4, 467, 5, 56, 57, 6, 67, 68, 7, 78, 8, 89, 9, 10	NO COMPACTION REQUIRED.
A	FOUNDATION STONE: FILL BELOW CHAMBERS FROM THE SUBGRADE UP TO THE FOOT (BOTTOM) OF THE CHAMBER.	AASHTO M43 ¹ 3, 357, 4, 467, 5, 56, 57	PLATE COMPACT OR ROLL TO ACHIEVE A FLAT SURFACE. ^{2,3}

- PLEASE NOTE:**
1. THE LISTED AASHTO DESIGNATIONS ARE FOR GRADATIONS ONLY. THE STONE MUST ALSO BE CLEAN, CRUSHED, ANGULAR. FOR EXAMPLE, A SPECIFICATION FOR #4 STONE WOULD STATE: "CLEAN, CRUSHED, ANGULAR NO. 4 (AASHTO M43) STONE".
 2. STORMTECH COMPACTION REQUIREMENTS ARE MET FOR 1" (25 mm) LOCAL MATERIALS WHEN PLACED AND COMPACTED IN 6" (150 mm) (MAX) LIFTS USING TWO FULL COVERAGES WITH A VIBRATORY COMPACTOR.
 3. WHERE INFILTRATION SURFACES MAY BE COMPROMISED BY COMPACTION, FOR STANDARD DESIGN LOAD CONDITIONS, A FLAT SURFACE MAY BE ACHIEVED BY RAKING OR DRAGGING WITHOUT COMPACTION EQUIPMENT. FOR SPECIAL LOAD DESIGNS, CONTACT STORMTECH FOR COMPACTION REQUIREMENTS.
 4. ONCE LAYER 'C' IS PLACED, ANY SOIL/MATERIAL CAN BE PLACED IN LAYER 'D' UP TO THE FINISHED GRADE. MOST PAVEMENT SUBBASE SOILS CAN BE USED TO REPLACE THE MATERIAL REQUIREMENTS OF LAYER 'C' OR 'D' AT THE SITE DESIGN ENGINEER'S DISCRETION.


IMPORTANT - NOTES FOR THE BIDDING AND INSTALLATION OF THE SC-740 SYSTEM

1. STORMTECH SC-740 CHAMBERS SHALL NOT BE INSTALLED UNTIL THE MANUFACTURER'S REPRESENTATIVE HAS COMPLETED A PRE-CONSTRUCTION MEETING WITH THE INSTALLERS.
2. STORMTECH SC-310 CHAMBERS SHALL BE INSTALLED IN ACCORDANCE WITH THE "STORMTECH SC-310/SC-740/DC-780 CONSTRUCTION GUIDE".
3. CHAMBERS ARE NOT TO BE BACKFILLED WITH A DOZER OR AN EXCAVATOR SITUATED OVER THE CHAMBERS. STORMTECH RECOMMENDS 3 BACKFILL METHODS:
 - STONEHOOKER LOCATED OFF THE CHAMBER BED.
 - BACKFILL AS ROWS ARE BUILT USING AN EXCAVATOR ON THE FOUNDATION STONE OR SUBGRADE.
 - BACKFILL FROM OUTSIDE THE EXCAVATION USING A LONG BOOM HOE OR EXCAVATOR.
4. THE FOUNDATION STONE SHALL BE LEVELED AND COMPACTED PRIOR TO PLACING CHAMBERS.
5. JOINTS BETWEEN CHAMBERS SHALL BE PROPERLY SEATED PRIOR TO PLACING STONE.
6. MAINTAIN MINIMUM - 6" (150 mm) SPACING BETWEEN THE CHAMBER ROWS.
7. EMBEDMENT STONE SURROUNDING CHAMBERS MUST BE A CLEAN, CRUSHED, ANGULAR STONE 3/4" (20-50 mm).
8. THE CONTRACTOR MUST REPORT ANY DISCREPANCIES WITH CHAMBER FOUNDATION MATERIALS BEARING CAPACITIES TO THE SITE DESIGN ENGINEER.
9. ADS RECOMMENDS THE USE OF "FLEXSTORM CATCH IT" INSERTS DURING CONSTRUCTION FOR ALL INLETS TO PROTECT THE SUBSURFACE STORMWATER MANAGEMENT SYSTEM FROM CONSTRUCTION SITE RUNOFF.

NOTES FOR CONSTRUCTION EQUIPMENT


1. STORMTECH SC-740 CHAMBERS SHALL BE INSTALLED IN ACCORDANCE WITH THE "STORMTECH SC-310/SC-740/DC-780 CONSTRUCTION GUIDE".
2. THE USE OF CONSTRUCTION EQUIPMENT OVER SC-310 & SC-740 CHAMBERS IS LIMITED:
 - NO EQUIPMENT IS ALLOWED ON BARE CHAMBERS.
 - NO RUBBER TIRE LOADERS, DUMP TRUCKS, OR EXCAVATORS ARE ALLOWED UNTIL PROPER FILL DEPTHS ARE REACHED IN ACCORDANCE WITH THE "STORMTECH SC-310/SC-740/DC-780 CONSTRUCTION GUIDE".
 - WEIGHT LIMITS FOR CONSTRUCTION EQUIPMENT CAN BE FOUND IN THE "STORMTECH SC-310/SC-740/DC-780 CONSTRUCTION GUIDE".
3. FULL 36" (900 mm) OF STABILIZED COVER MATERIALS OVER THE CHAMBERS IS REQUIRED FOR DUMP TRUCK TRAVEL OR DUMPING.

USE OF A DOZER TO PUSH EMBEDMENT STONE BETWEEN THE ROWS OF CHAMBERS MAY CAUSE DAMAGE TO THE CHAMBERS AND IS NOT AN ACCEPTABLE BACKFILL METHOD. ANY CHAMBERS DAMAGED BY THE "DUMP AND PUSH" METHOD ARE NOT COVERED UNDER THE STORMTECH STANDARD WARRANTY.
CONTACT STORMTECH AT 1-888-982-2684 WITH ANY QUESTIONS ON INSTALLATION REQUIREMENTS OR WEIGHT LIMITS FOR CONSTRUCTION EQUIPMENT.

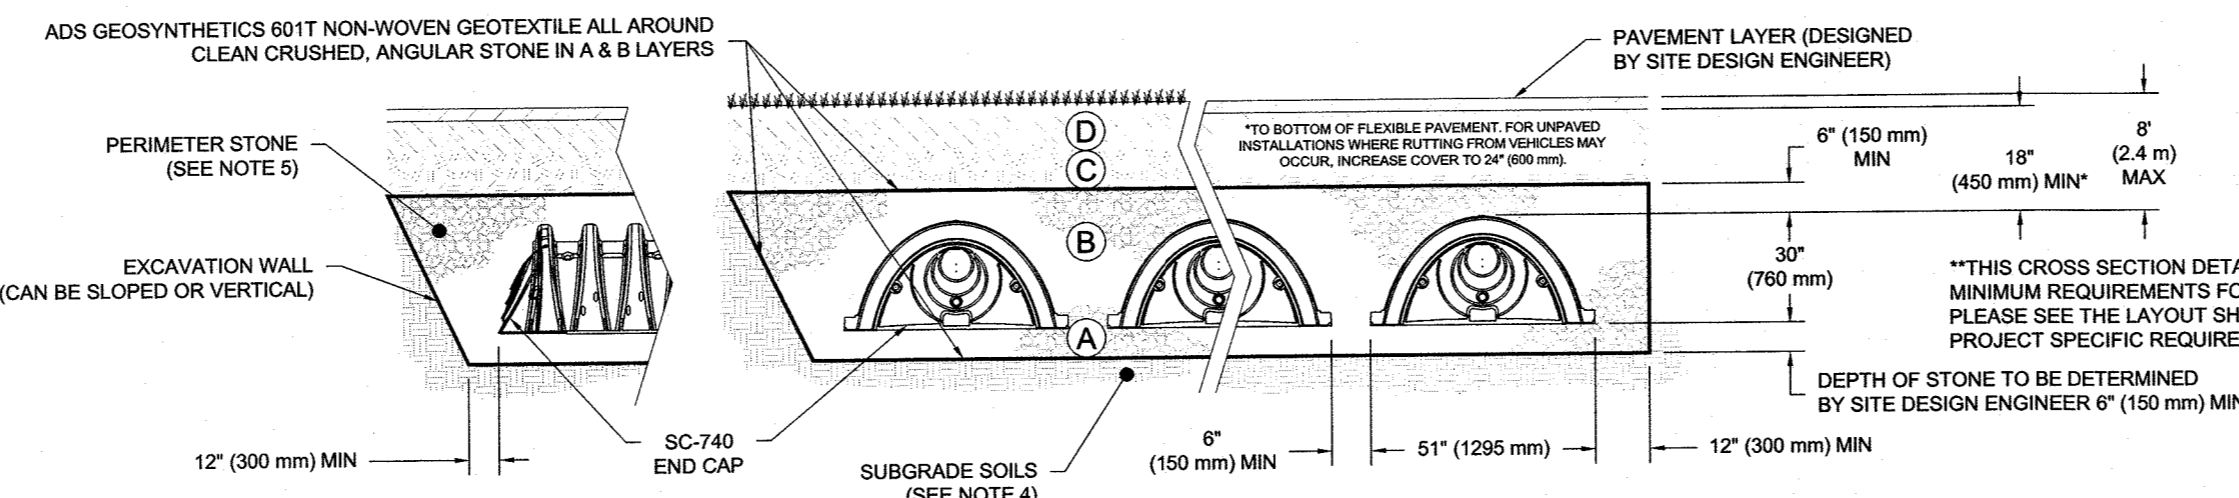


NOTES:

1. CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F2922 (POLETHYLENE) OR ASTM F2418-16a (POLYPROPYLENE), "STANDARD SPECIFICATION FOR CORRUGATED WALL STORMWATER COLLECTION CHAMBERS".
2. SC-740 CHAMBERS SHALL BE DESIGNED IN ACCORDANCE WITH ASTM F2787 "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS".
3. THE SITE DESIGN ENGINEER IS RESPONSIBLE FOR ASSESSING THE BEARING RESISTANCE (ALLOWABLE BEARING CAPACITY) OF THE SUBGRADE SOILS AND THE DEPTH OF FOUNDATION STONE WITH CONSIDERATION FOR THE RANGE OF EXPECTED SOIL MOISTURE CONDITIONS.
4. PERIMETER STONE MUST BE EXTENDED HORIZONTALLY TO THE EXCAVATION WALL FOR BOTH VERTICAL AND SLOPED EXCAVATION WALLS.
5. REQUIREMENTS FOR HANDLING AND INSTALLATION:
 - TO MAINTAIN THE WIDTH OF CHAMBERS DURING SHIPPING AND HANDLING, CHAMBERS SHALL HAVE INTEGRAL, INTERLOCKING STACKING LUGS.
 - TO ENSURE A SECURE JOINT DURING INSTALLATION AND BACKFILL, THE HEIGHT OF THE CHAMBER JOINT SHALL NOT BE LESS THAN 2".
 - TO ENSURE THE INTEGRITY OF THE ARCH SHAPE DURING INSTALLATION, a) THE ARCH STIFFNESS CONSTANT AS DEFINED IN SECTION 6.2.8 OF ASTM F2922 SHALL BE GREATER THAN OR EQUAL TO 400 LBS/IN. AND b) TO RESIST CHAMBER DEFORMATION DURING INSTALLATION AT ELEVATED TEMPERATURES (ABOVE 73° F / 23° C), CHAMBERS SHALL BE PRODUCED FROM REFLECTIVE GOLD OR YELLOW COLORS.

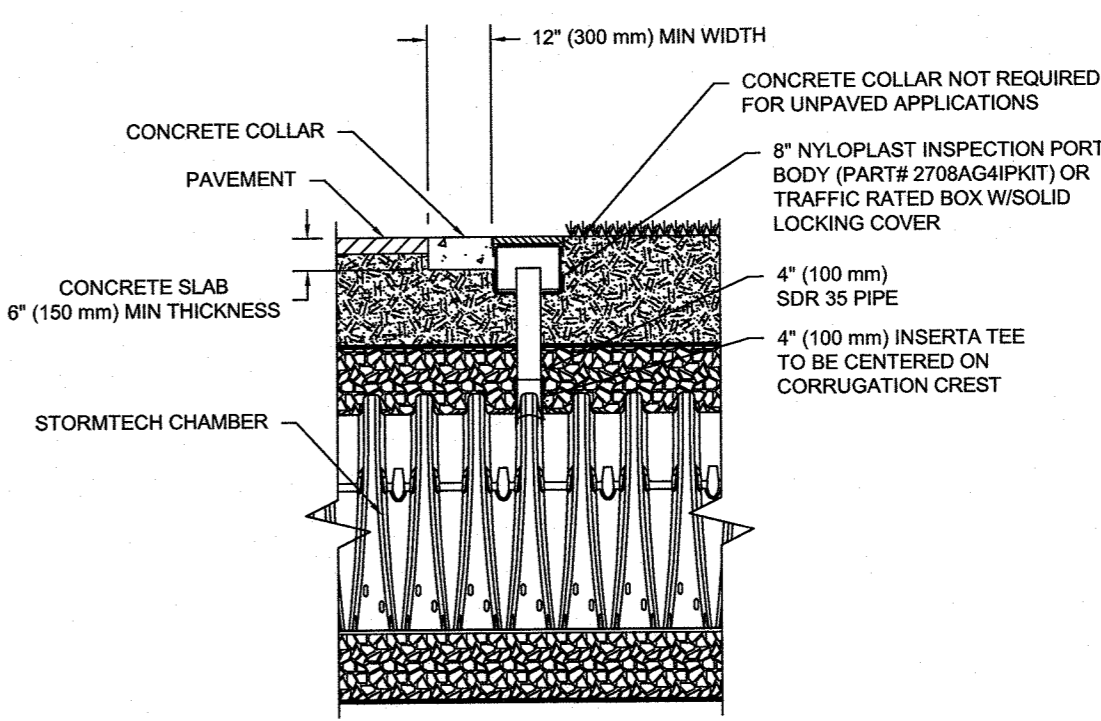

NOTE: INSPECTION PORTS MAY BE CONNECTED THROUGH ANY CHAMBER CORRUGATION CREST.

4\"/>

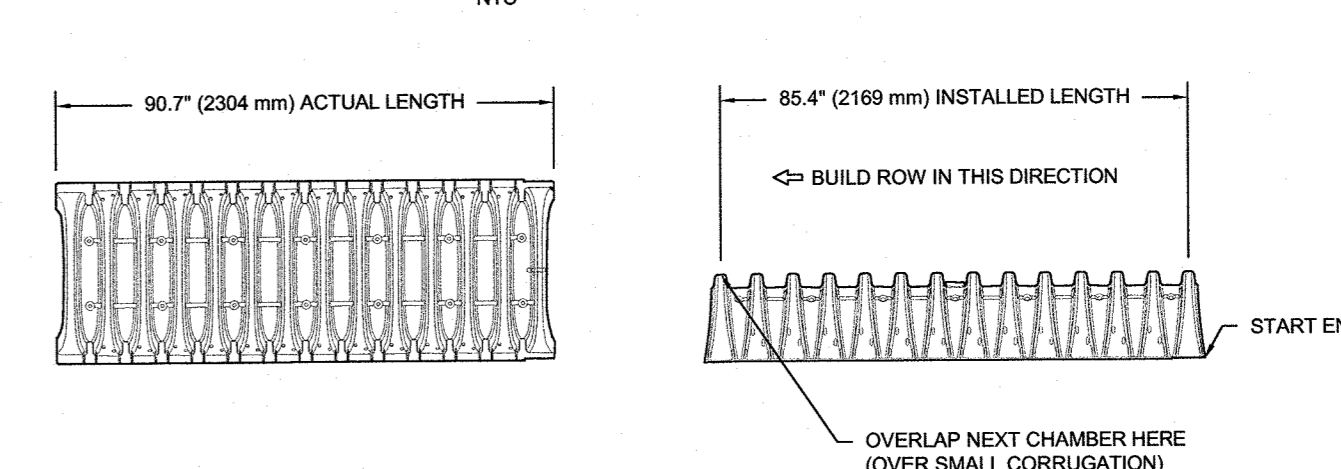

NOMINAL CHAMBER SPECIFICATIONS

SIZE (W X H X INSTALLED LENGTH)	51.0\"/>	(1295 mm X 762 mm X 2170 mm)
CHAMBER STORAGE	45.9 CUBIC FEET	(1.30 m ³)
MINIMUM INSTALLED STORAGE*	74.90 CUBIC FEET	(2.12 m ³)
WEIGHT	74.0 lbs.	(33.6 kg)

*ASSUMES 6\"/>

Not For Construction

WARNING: Use The Architect, Inc. all drawings and written material herein constitute the original and unaltered work of the architect, and the same may not be duplicated, used, or disclosed without the written consent of the architect. Contractors to use Architectural drawings for set out. Contractors to check and verify all dimensions on site prior to construction. Fabrication. Figure Dimensions take precedence over Section Dimensions. Any discrepancies should be immediately referred to the architect. The project manager shall be notified in writing of any discrepancies prior to proceeding with the work. The scale of drawings may change when copied or filed. All work to comply with U.S. Regulations and relevant American Standards. © 2019 - all rights reserved.

consultant / contractor information:

LEVEL
DESIGN GROUP
CIVIL ENGINEERING / LAND SURVEYING
249 SOUTH STREET
UNIT 1
PLAINVILLE, MA 02762
TEL. (508) 695-2221 FAX. (508) 695-2219

stamp:

revision	revision description	date
1	COMMENT RESPONSE	9-15-2021

project title:
FACTORY SQUARE FRANKLIN

5 FISHER STREET, FRANKLIN, MA 02038

client information:
K FISHER STREET LLC


1 FISHER STREET, FRANKLIN, MA 02038

J t A
JOE THE ARCHITECT
343 Medford Street, Suite 4C Somerville, MA 02145
t: +1(617) 764-3593 e: askjoe@joethearchitect.com
www.joethearchitect.com

drawing title
**TYPICAL
DETAILS**

project number 1899.00	drawing scale AS SHOWN	approver
drawing number C-4.2	revision	



SC-740 CROSS SECTION DETAIL

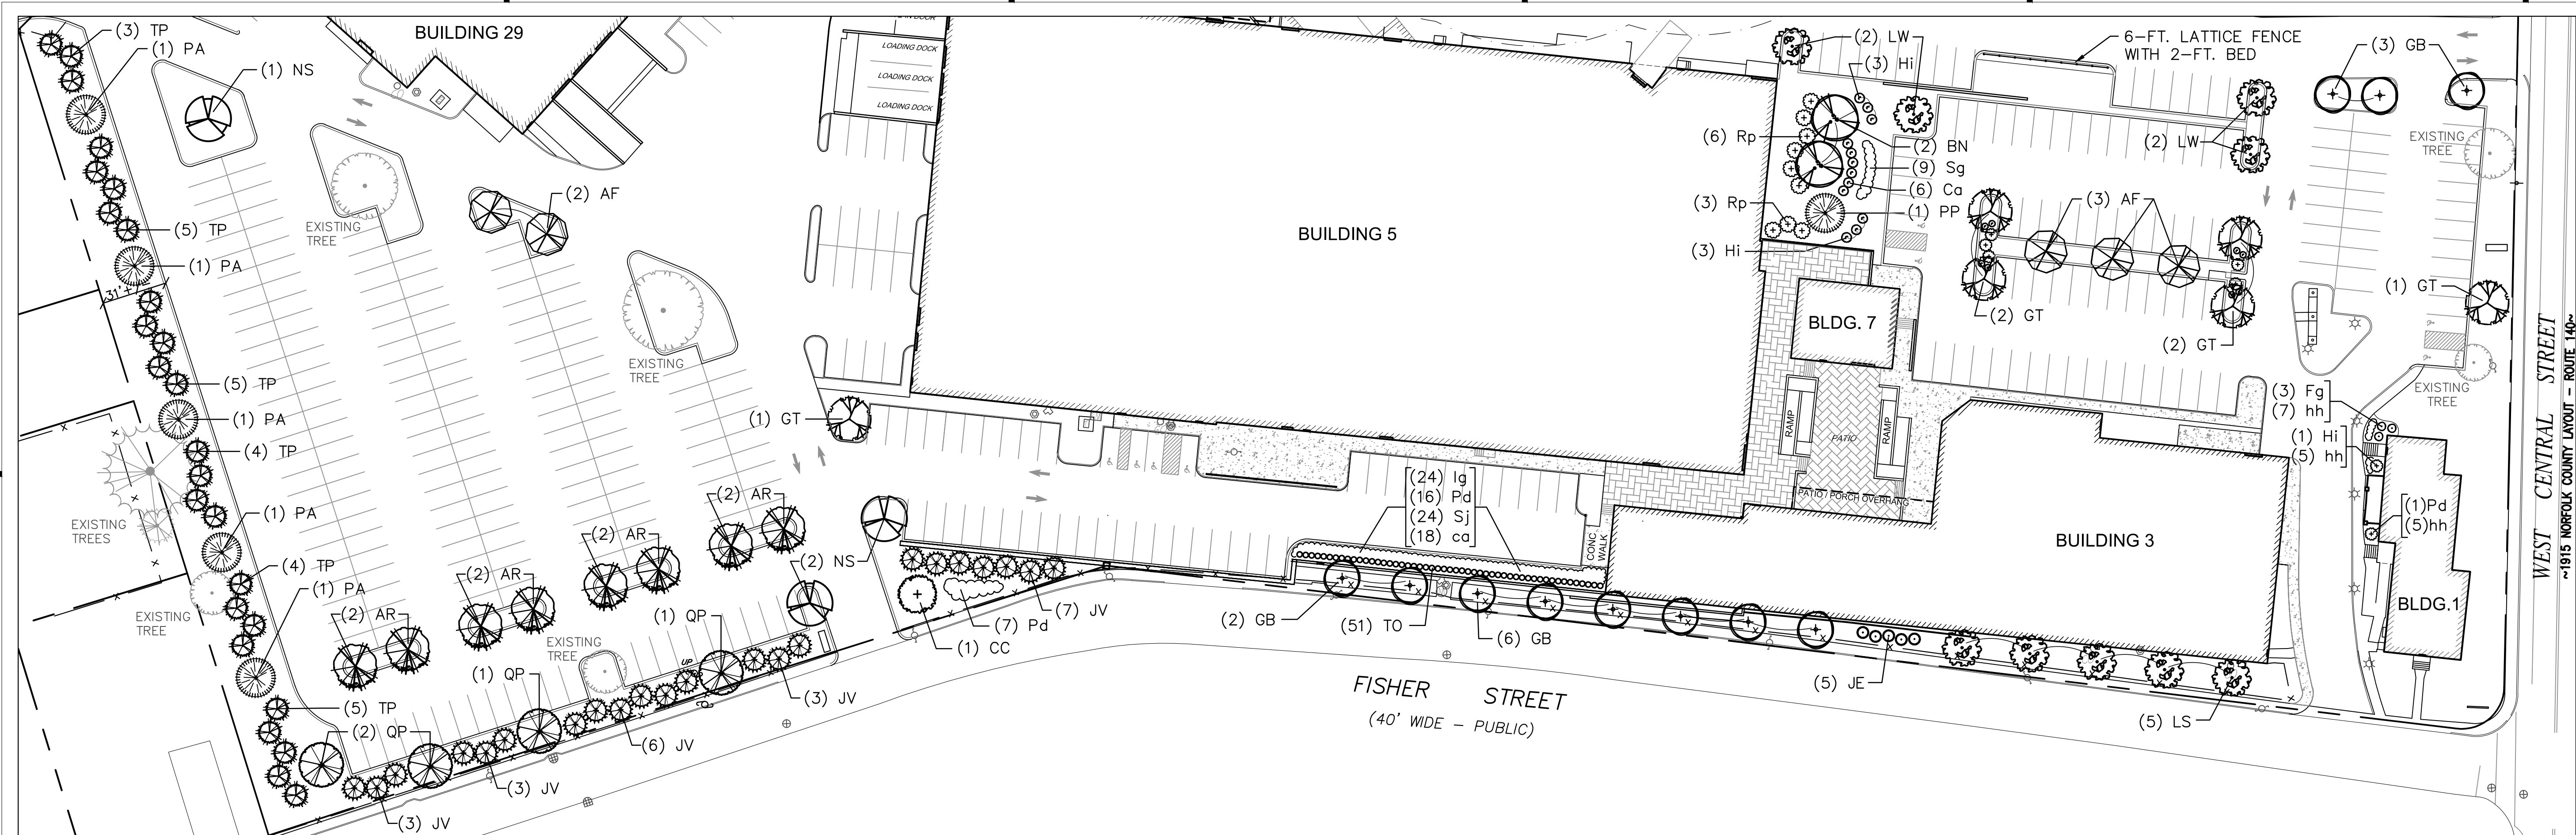

LANDSCAPE PLAN:

Scale: 1" = 40' - 0"


SCALE: 1" = 40'-0"

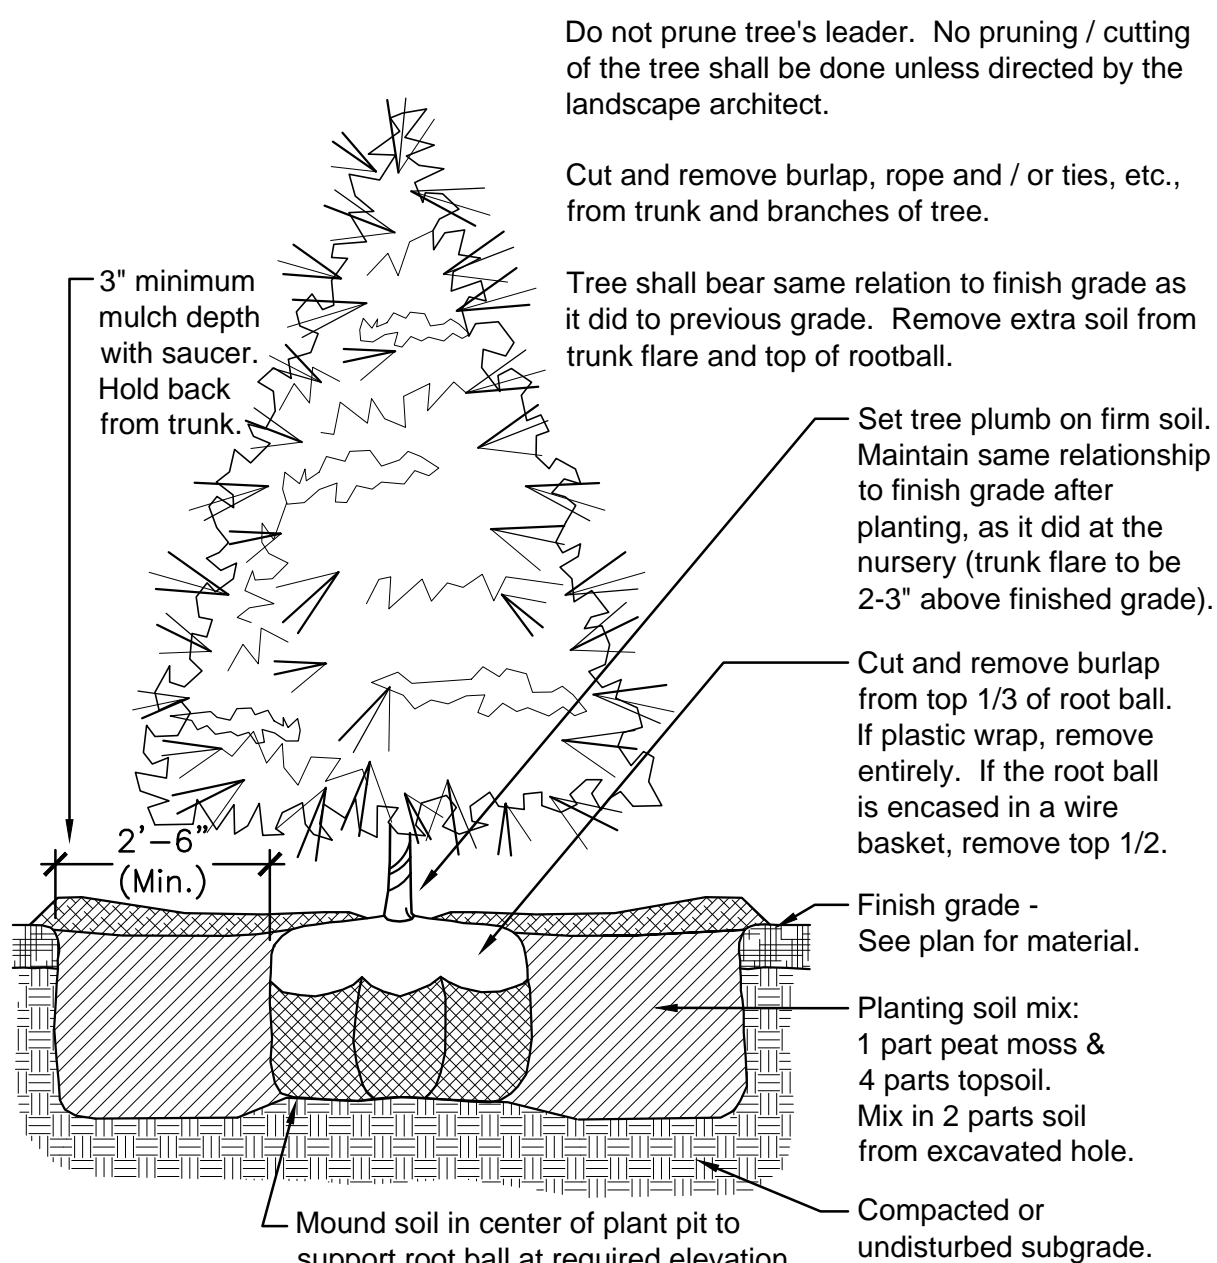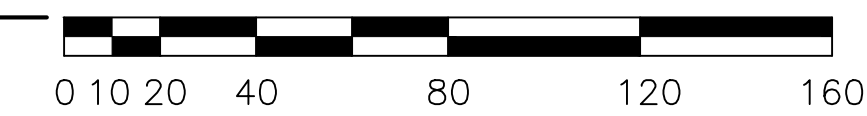

- NOTES:**
1. Flood saucer twice during the first 24-hours after planting.
 2. Soak each tree twice weekly, for (3) weeks after fall planting.
 3. Soak each tree twice weekly, during spring and summer planting.

1 TYP. EVERGREEN TREE PLANTING


Scale: 1/2" = 1' - 0"

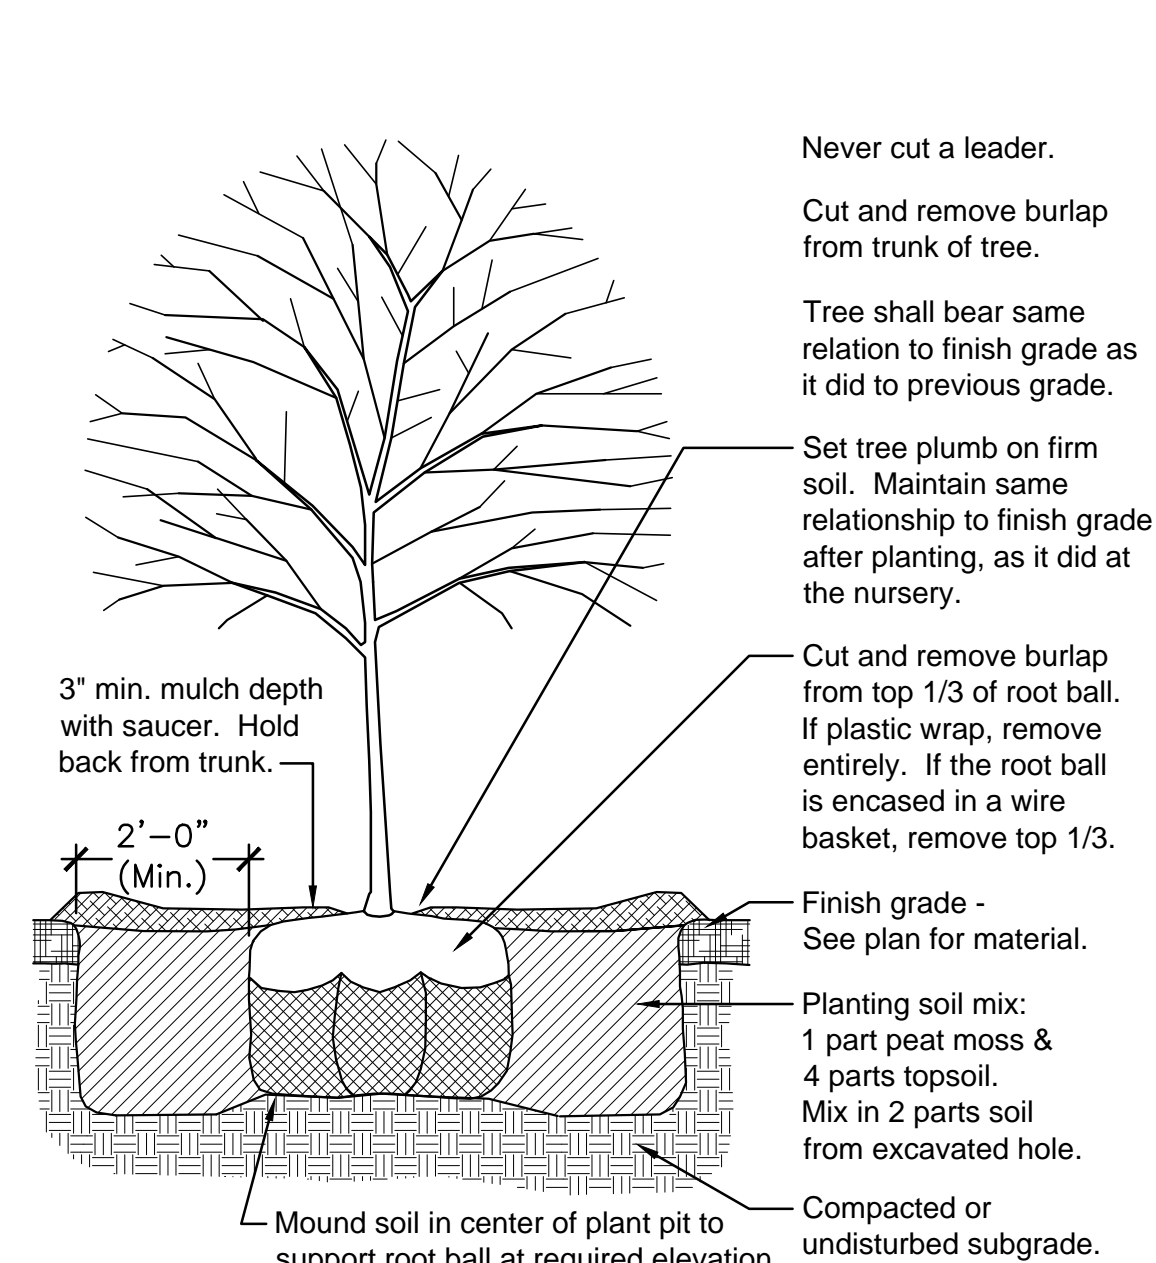

- NOTES:**
1. Soak each tree twice weekly, for (3) weeks after fall planting
 2. Soak each tree twice weekly, during spring and summer planting.
 3. Contractor to provide a price for staking of each individual tree.

2 TYP. DECIDUOUS TREE PLANTING

Scale: 1/2" = 1' - 0"

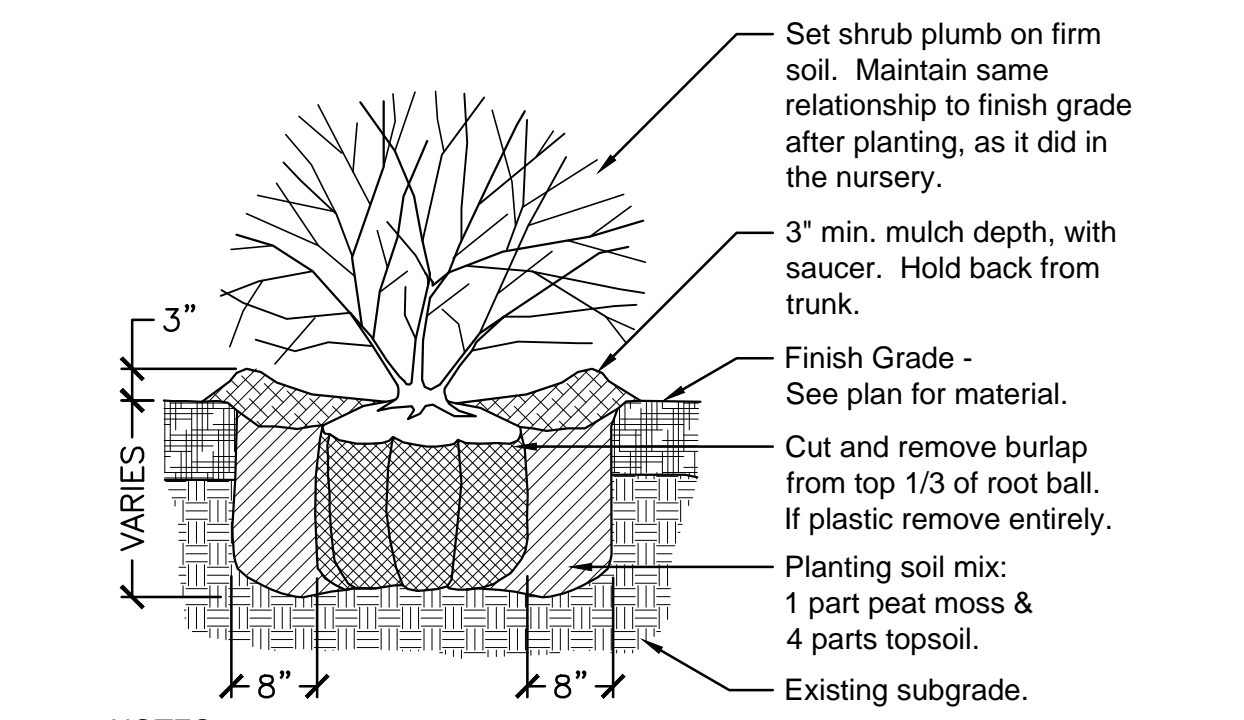

- NOTES:**
1. New shrub beds to have a minimum of one foot planting soil.
 2. Shrubs to be full and bushy.

3 TYPICAL SHRUB PLANTING

Scale: 3/4" = 1' - 0"

PLANTING NOTES:


1. Trees and shrubs shall be uniform, full and bushy, and well branched specimen plants. All plants to be approved by the Landscape Architect.
2. Plants shall be balled and burlapped or container grown.
3. Plants to conform to the requirements established in the 'American Standards For Nursery Stock', latest edition.
4. Plant beds to receive 3-inch minimum depth of shredded bark mulch. Contractor to submit bark samples for approval.
5. Plant materials shall be guaranteed for one year (1-year) after installation.
6. Plant materials shall be field located & approved by the Landscape Architect.
7. Plant beds at perennials to have a 6-in. min. depth of loam. Loam at trees, shrubs, and ornamental grass locations to be depth of root ball.
8. Loam (6" minimum depth) and seed all lawn areas and disturbed areas not noted to receive other treatment.
9. Plant substitutions will be allowed based on best availability of nursery stock, with all substitutions to be approved by the Landscape Architect.

PLANT LIST (TREES):

Qty.	Sym.	Botanical Name	Common Name	Size
5	AF	Acer x freemanii 'Autumn Blaze'	'Autumn Blaze' Maple	2 1/2 - 3" cal.
8	AR	Acer rubrum 'October Glory'	'October Glory' Red Maple	2.5-3" B&B
2	BN	Betula nigra 'Heritage'	'Heritage' River Birch	12-14" ht. clmp.
1	CC	Carpinus caroliniana	American Hornbeam	2 1/2 - 3" cal.
11	GB	Ginkgo biloba 'Fastigiata'	Fastigiata Maidenhair	2 1/2 - 3" cal.
6	GT	Gleditsia triacanthos 'Halka'	'Halka' Honeylocust	2 1/2 - 3" cal.
5	JE	Juniperus virginiana 'Emerald Sentinel'	'Emerald Sentinel' Red Cedar	7 - 8" ht. / B+B
22	JV	Juniperus virginiana	Eastern Red Cedar	7 - 8" ht. / B+B
5	LS	Liquidambar styraciflua Slender Silhouette	American Sweetgum	2 1/2 - 3" cal.
4	LW	Liquidambar styraciflua 'Ward'	Cherokee 'Ward' Sweetgum	2 1/2 - 3" cal.
3	NS	Nyssa sylvatica 'Wildfire'	'Wildfire' Tupelo	2 1/2 - 3" cal.
1	PA	Picea pungens glauca	Colorado Blue Spruce	10 - 12" height
51	TO	Thuja occidentalis 'Emerald' (Smaragd)	'Emerald' (Smaragd) Arborvitae	6 - 7" height
4	QP	Quercus palustris	Pin Oak	3 - 3 1/2" cal.
26	TP	Thuja plicata 'Green Giant'	'Green Giant' Arborvitae	8 - 10" ht. B&B


PLANT LIST (SHRUBS):

Qty.	Sym.	Botanical Name	Common Name	Size
6	Ca	Cornus alba 'Ivory Halo'	'Ivory Halo' Dogwood	5 gallon pot
3	Fg	Fothergilla gardenii	Dwarf Fothergilla	5 gallon pot
6	Ha	Hydrangea anomala petiolaris	Climbing Hydrangea	5 gallon pot
7	Hi	Hydrangea arbor. 'Invincible'	'Invincible' Hydrangea	5 gallon pot
24	Ig	Ilex glabra 'Shamrock'	'Shamrock' Inkberry	7 gallon pot
24	Pd	Physocarpus opulifolius 'Diabolo'	'Diabolo' Purple Ninebark	30 - 36" height
5	Po	Physocarpus opulifolius 'Little Devil'	'Little Devil' Ninebark	24 - 30" height
9	Rp	Rhododendron 'PJM'	'PJM' Rhododendron	7 gallon pot
17	Sg	Spiraea japonica 'Gold Mound'	'Gold Mound' Spirea	18 - 24" height
24	Sj	Spiraea japonica 'Little Princess'	'Little Princess' Spirea	18 - 24" height

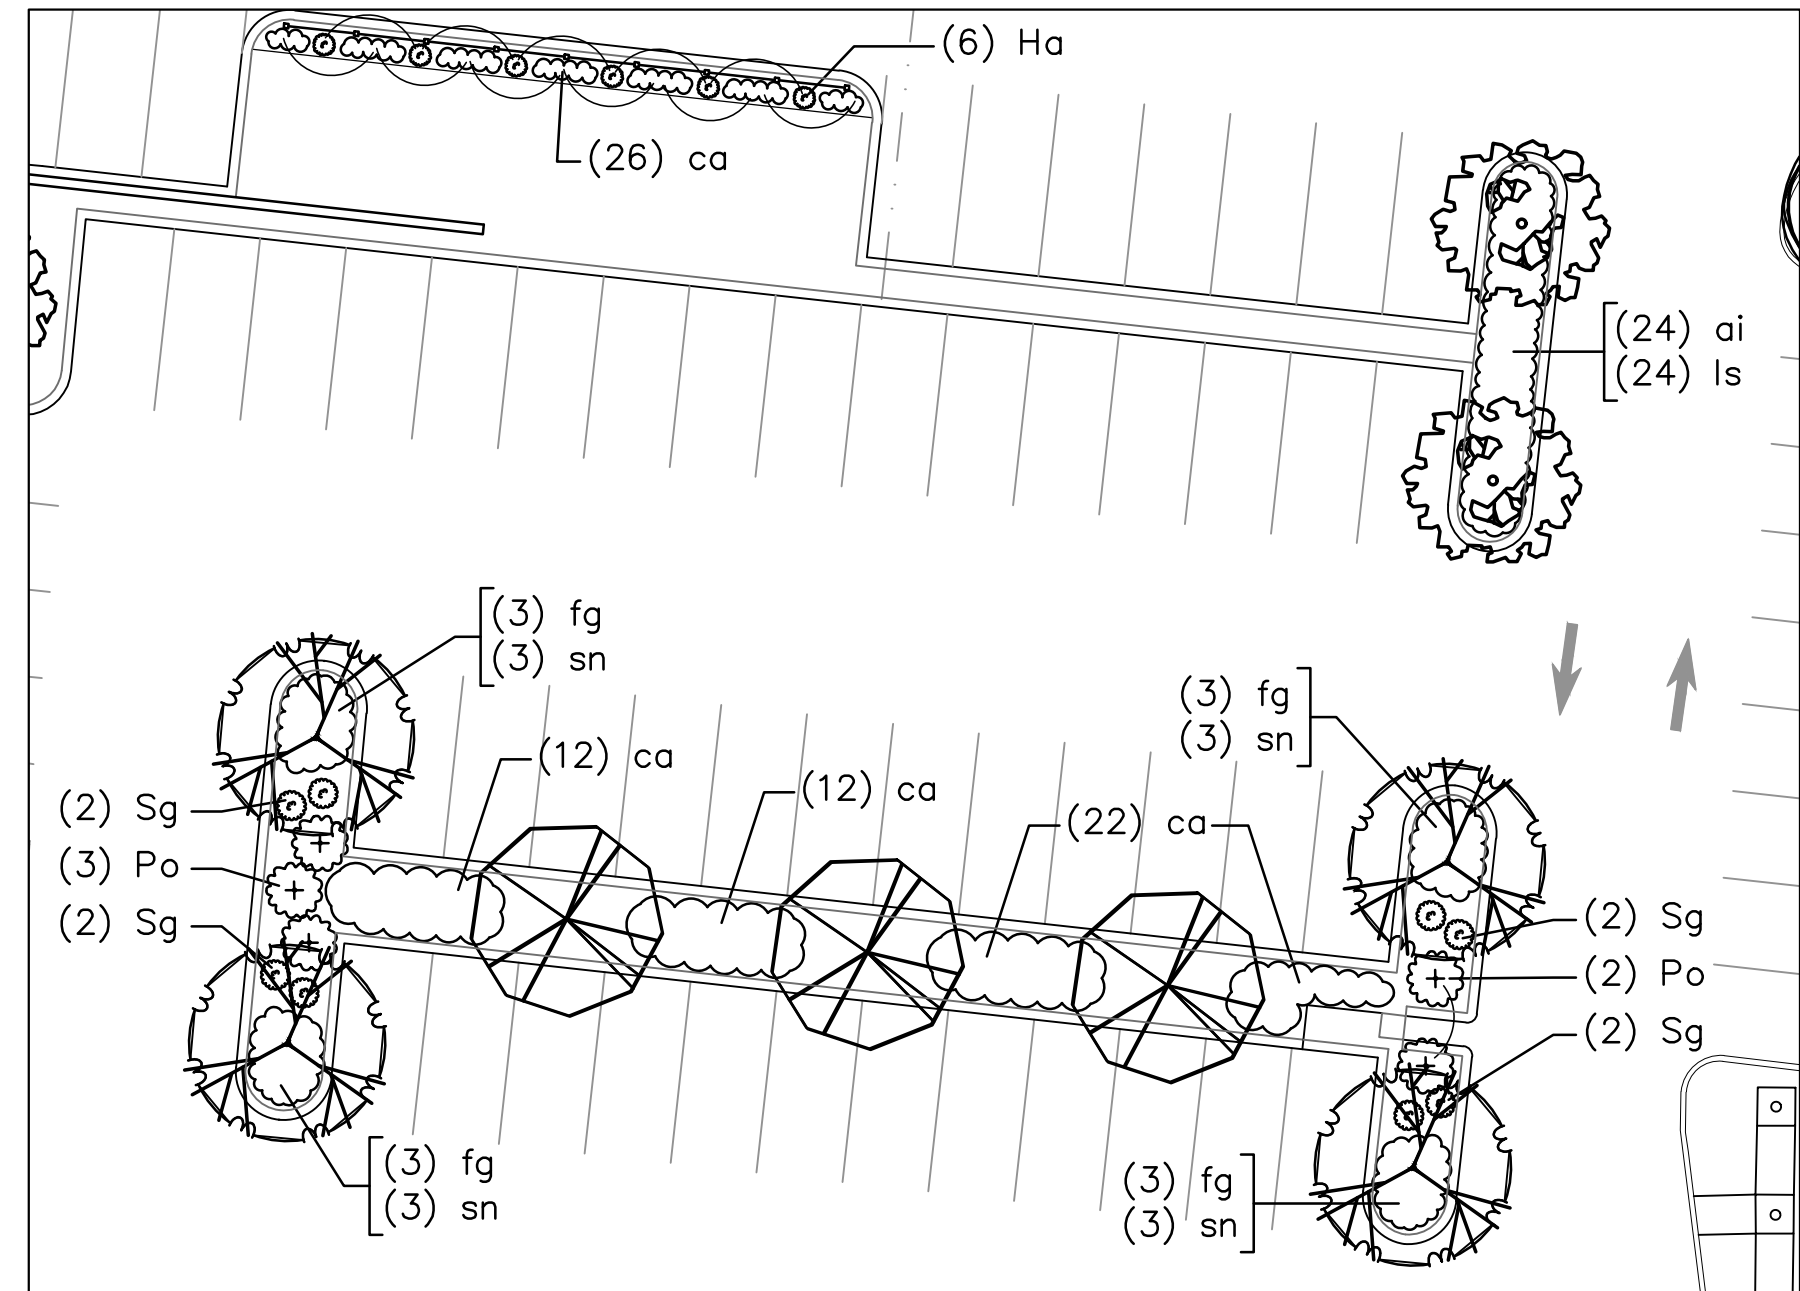

LANDSCAPE ENLARGEMENT:

Scale: 1" = 20' - 0"

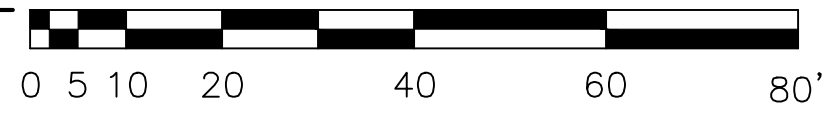

PLANT LIST (PERENNIALS & GRASSES):

Qty.	Sym.	Botanical Name	Common Name	Size
24	ai	Amsonia illustris	Showy Blue-Star	1 gallon pot
90	ca	Calam agrostis x acutiflora 'Karl Foerster'	'Karl Foerster' Feather Rd. Grass	3 gallon pot
12	fg	Festuca glauca 'Boulder Blue'	'Boulder Blue' Fescue	1 gallon pot
17	hh	Hemerocallis x 'Happy Returns'	'Happy Returns' Daylily	1 gallon pot
24	ls	Liatris spicata 'Kobold'	'Kobold' Blazingstar	2 gallon pot
12	sn	Salvia nemorosa 'May Night'	'May Night' Sage	1 gallon pot

Not For Construction

WARNING: For the Architect's use, all drawings and written material herein constitute the original and copyrighted work of the architect, and the same may not be duplicated, used, or disclosed without the written consent of the architect. Contractors to use architectural drawings for set-out. Contractors to check and verify all dimensions on the plans to Construction Fabrication. Figure Dimensions take precedence over Scaled Dimensions. See drawings for any discrepancies referred to the Architect. The project manager shall be notified in writing of any discrepancies prior to proceeding with the work. The scale of drawings may change where copied or traced. All work to comply with I.B.C. Regulations and relevant American Standards. © 2019 - all rights reserved.

consultant / contractor information:
Cosmos Associates
 Landscape Architects & Site Planners
 5 Longview Street - Natick, MA 01760
 p: 508.654.6847
 www.cosmosassociates.com



revision	revision description	date
1	REVD. PLANTS - PEER REVIEW	9/15/2021

project title:
FACTORY SQUARE FRANKLIN
 5 FISHER STREET, FRANKLIN, MA 02038
 client information:
 K FISHER STREET LLC
 1 FISHER STREET, FRANKLIN, MA 02038

J t A
JOE THE ARCHITECT
 343 Medford Street, Suite 4C Somerville, MA 02145
 t +1(617) 784-3593 e: askjoe@joethearchitect.com
 www.joethearchitect.com

drawing title
LANDSCAPE PLAN

date	drawing scale	approver
July 3, 2021	AS SHOWN	SGC
drawing number		revision
L100		


Fisher St - Franklin / Fisher-Landscape 9-15-2021 Rev1.pdf

COSMOS ASSOCIATES SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION METHODS, TECHNIQUES OR PROCEDURES UTILIZED BY THE CONTRACTOR. WORK FOR THE SAFETY OF PUBLIC OR CONTRACTOR'S PROPERTY, OR FOR THE FAILURE OF THE CONTRACTOR TO CLARIFY OR CORRECT THE WORKING DRAWINGS WITH THE CONTRACT DOCUMENTS. THE EXTENT OF COSMOS ASSOCIATES LIABILITY FOR THIS PLAN IS LIMITED TO THE EXTENT OF ITS FEES LESS THIRD PARTY COST.

COPYRIGHT (C) by COSMOS ASSOCIATES
 All Rights Reserved


NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE, WITHOUT THE PRIOR WRITTEN PERMISSION OF COSMOS ASSOCIATES. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF COSMOS ASSOCIATES SHALL RENDER IT INVALID AND UNUSABLE.

7/3/2021 10:53 PM

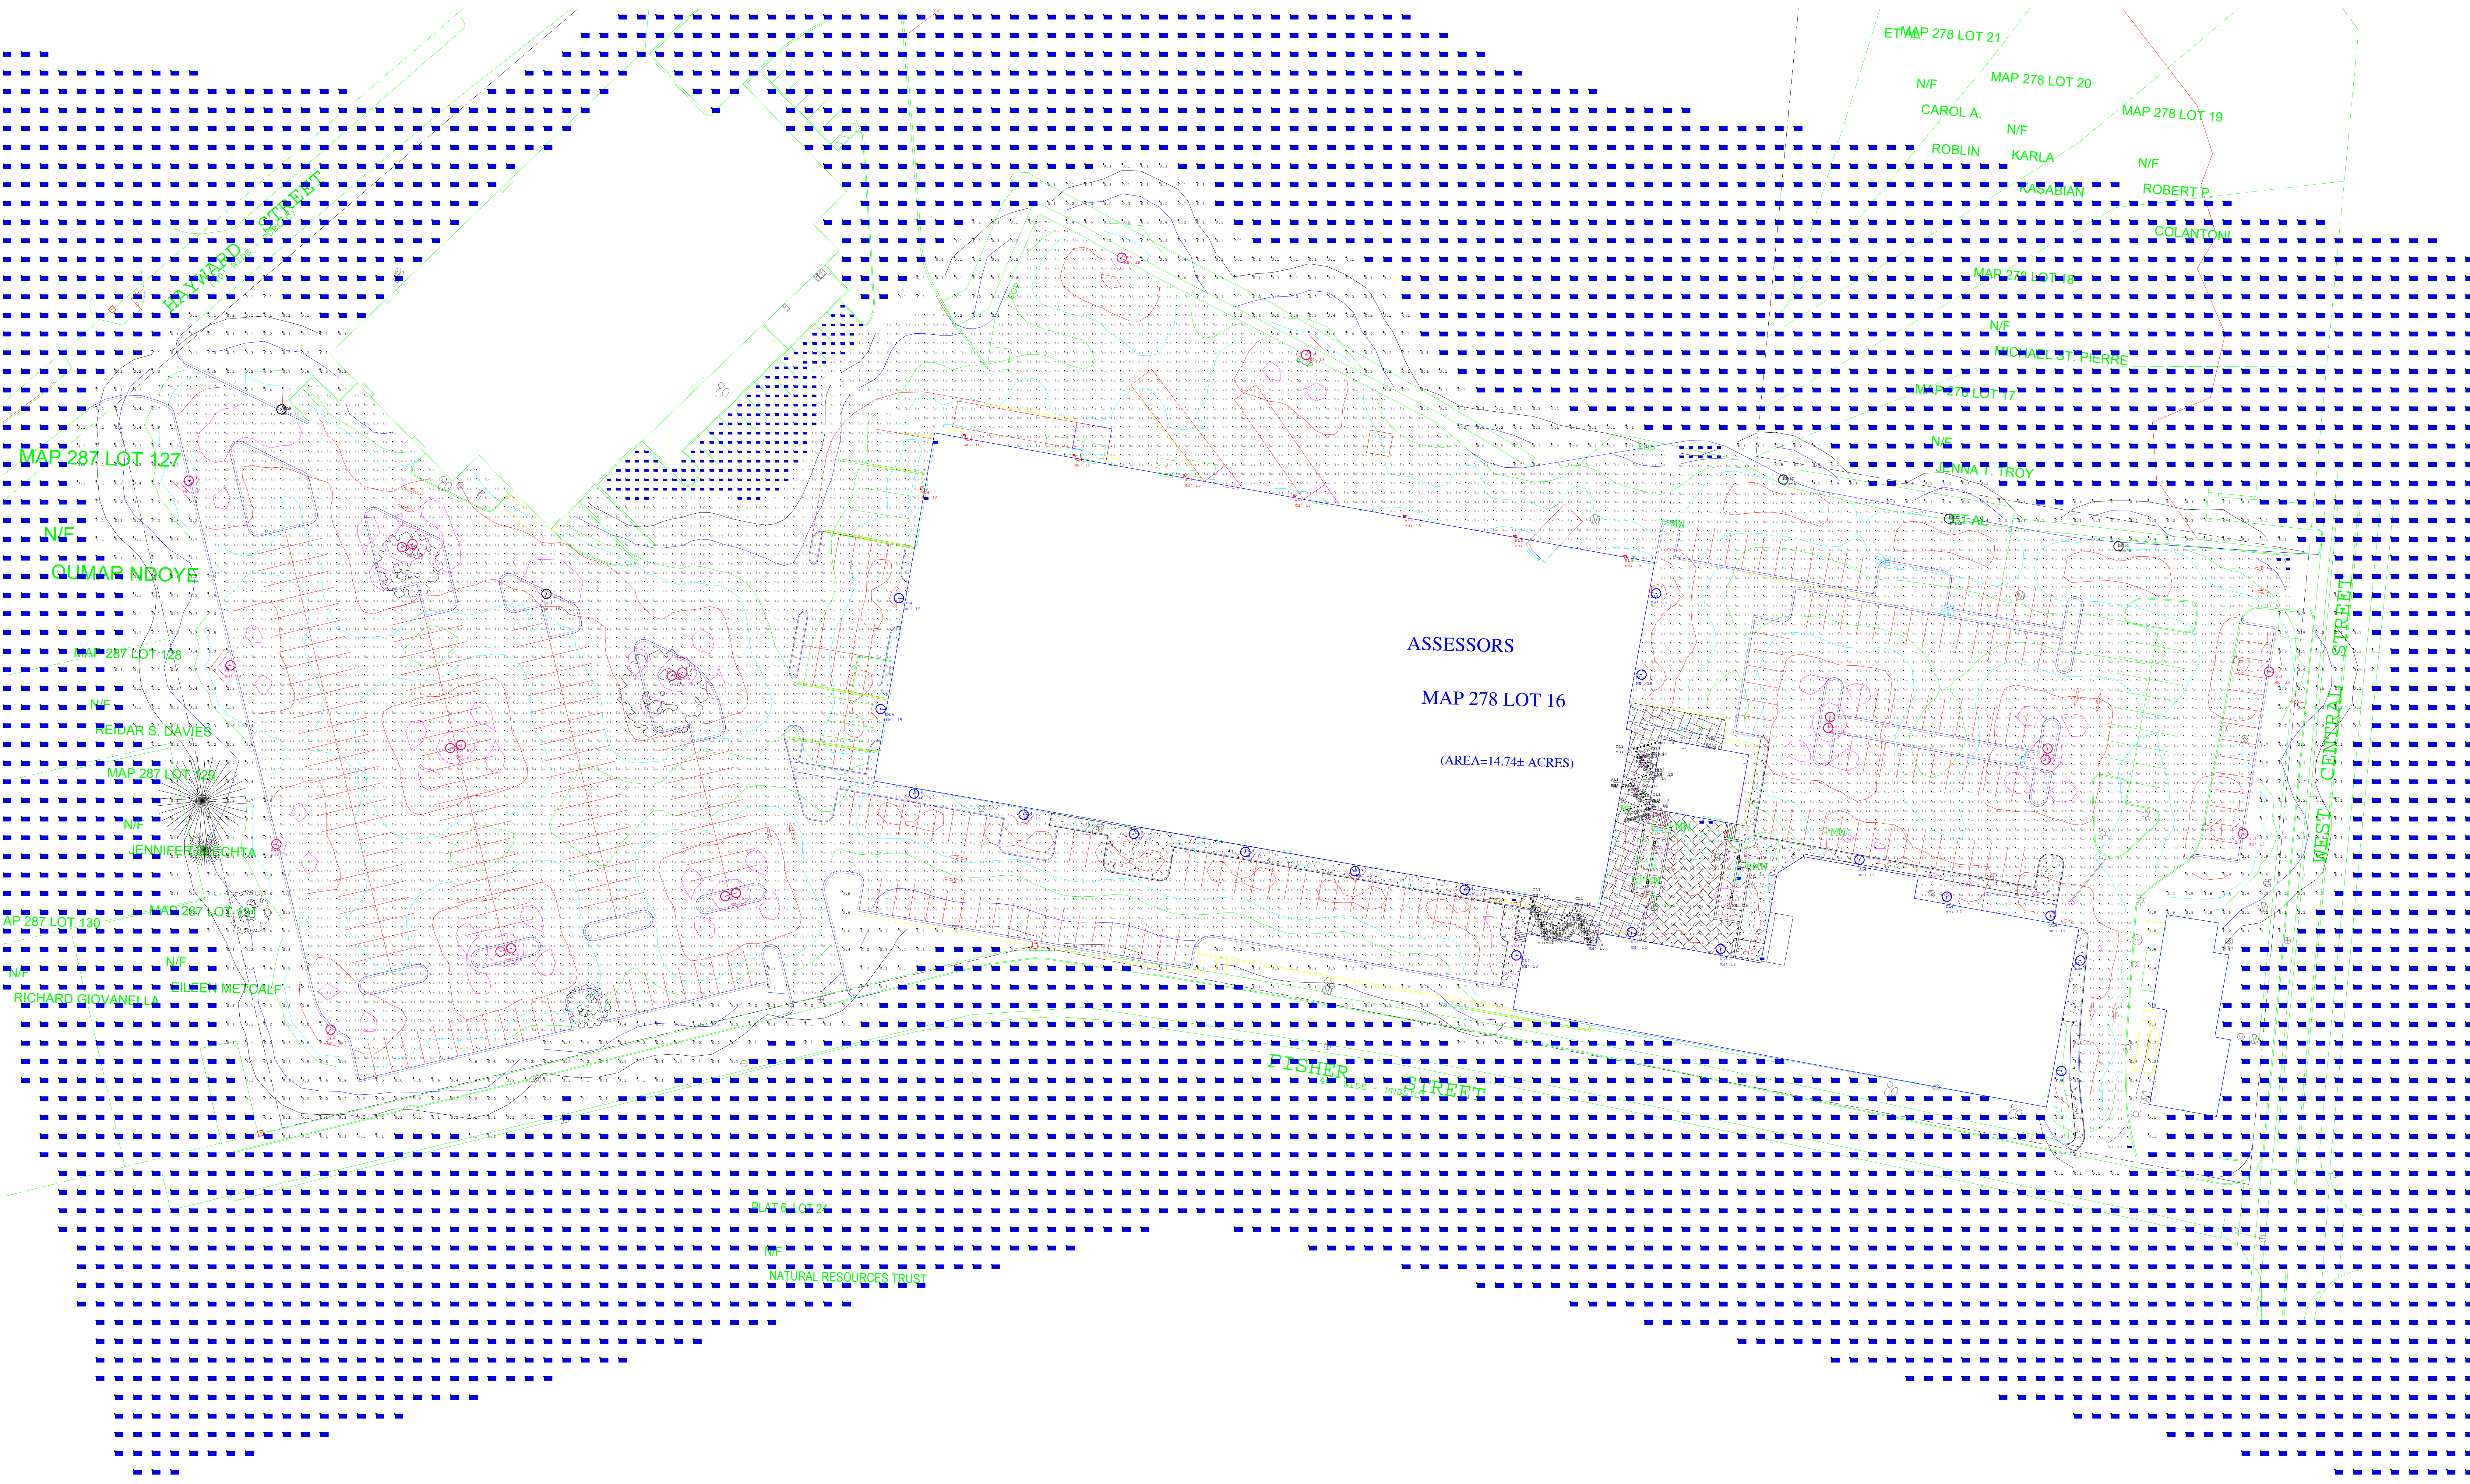

Luminaire Schedule						
Symbol	Qty	Label	Arrangement	LLF	Description	Lum. Lumens
⊗	7	SL4-2	BACK-BACK	0.900	URB-XXXX-26-60L-136-4K7-4W-U	15453
⊕	8	WL4	SINGLE	0.900	RWL1-48L-35-4K7-4W-U	4662
●	66	CL1	SINGLE	16.000	DLD-CL-MD-24-BK-TG25	20
⊖	4	PL1	SINGLE	0.900	99075	2370
⊙	2	SL3	SINGLE	0.900	URB-XXXX-26-60L-136-4K7-3-U	15677
⊚	7	SP1	SINGLE	0.900	33053	231
⊗	8	SL4	SINGLE	0.900	URB-XXXX-26-60L-136-4K7-4W-U	15453
⊕	18	DL4	SINGLE	0.900	URB-XXXX-21-24L-55-4K7-4W-U	6206
⊖	3	SL4BC	SINGLE	0.900	URB-XXXX-26-60L-136-4K7-4W-BC-U	7947

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
COURTYARD	Illuminance	Fc	3.17	12.1	0.4	7.93	30.25
FRONT PARKING LOT	Illuminance	Fc	1.93	15.4	0.1	19.30	154.00
LOADING AREA	Illuminance	Fc	1.42	9.5	0.0	N.A.	N.A.
REAR PARKING	Illuminance	Fc	1.89	15.1	0.0	N.A.	N.A.
SIDEWALK	Illuminance	Fc	2.51	5.0	1.0	2.51	5.00
SIDEWALK_1	Illuminance	Fc	4.51	9.9	2.1	2.15	4.71
SPILL LIGHT	Illuminance	Fc	0.06	9.3	0.0	N.A.	N.A.

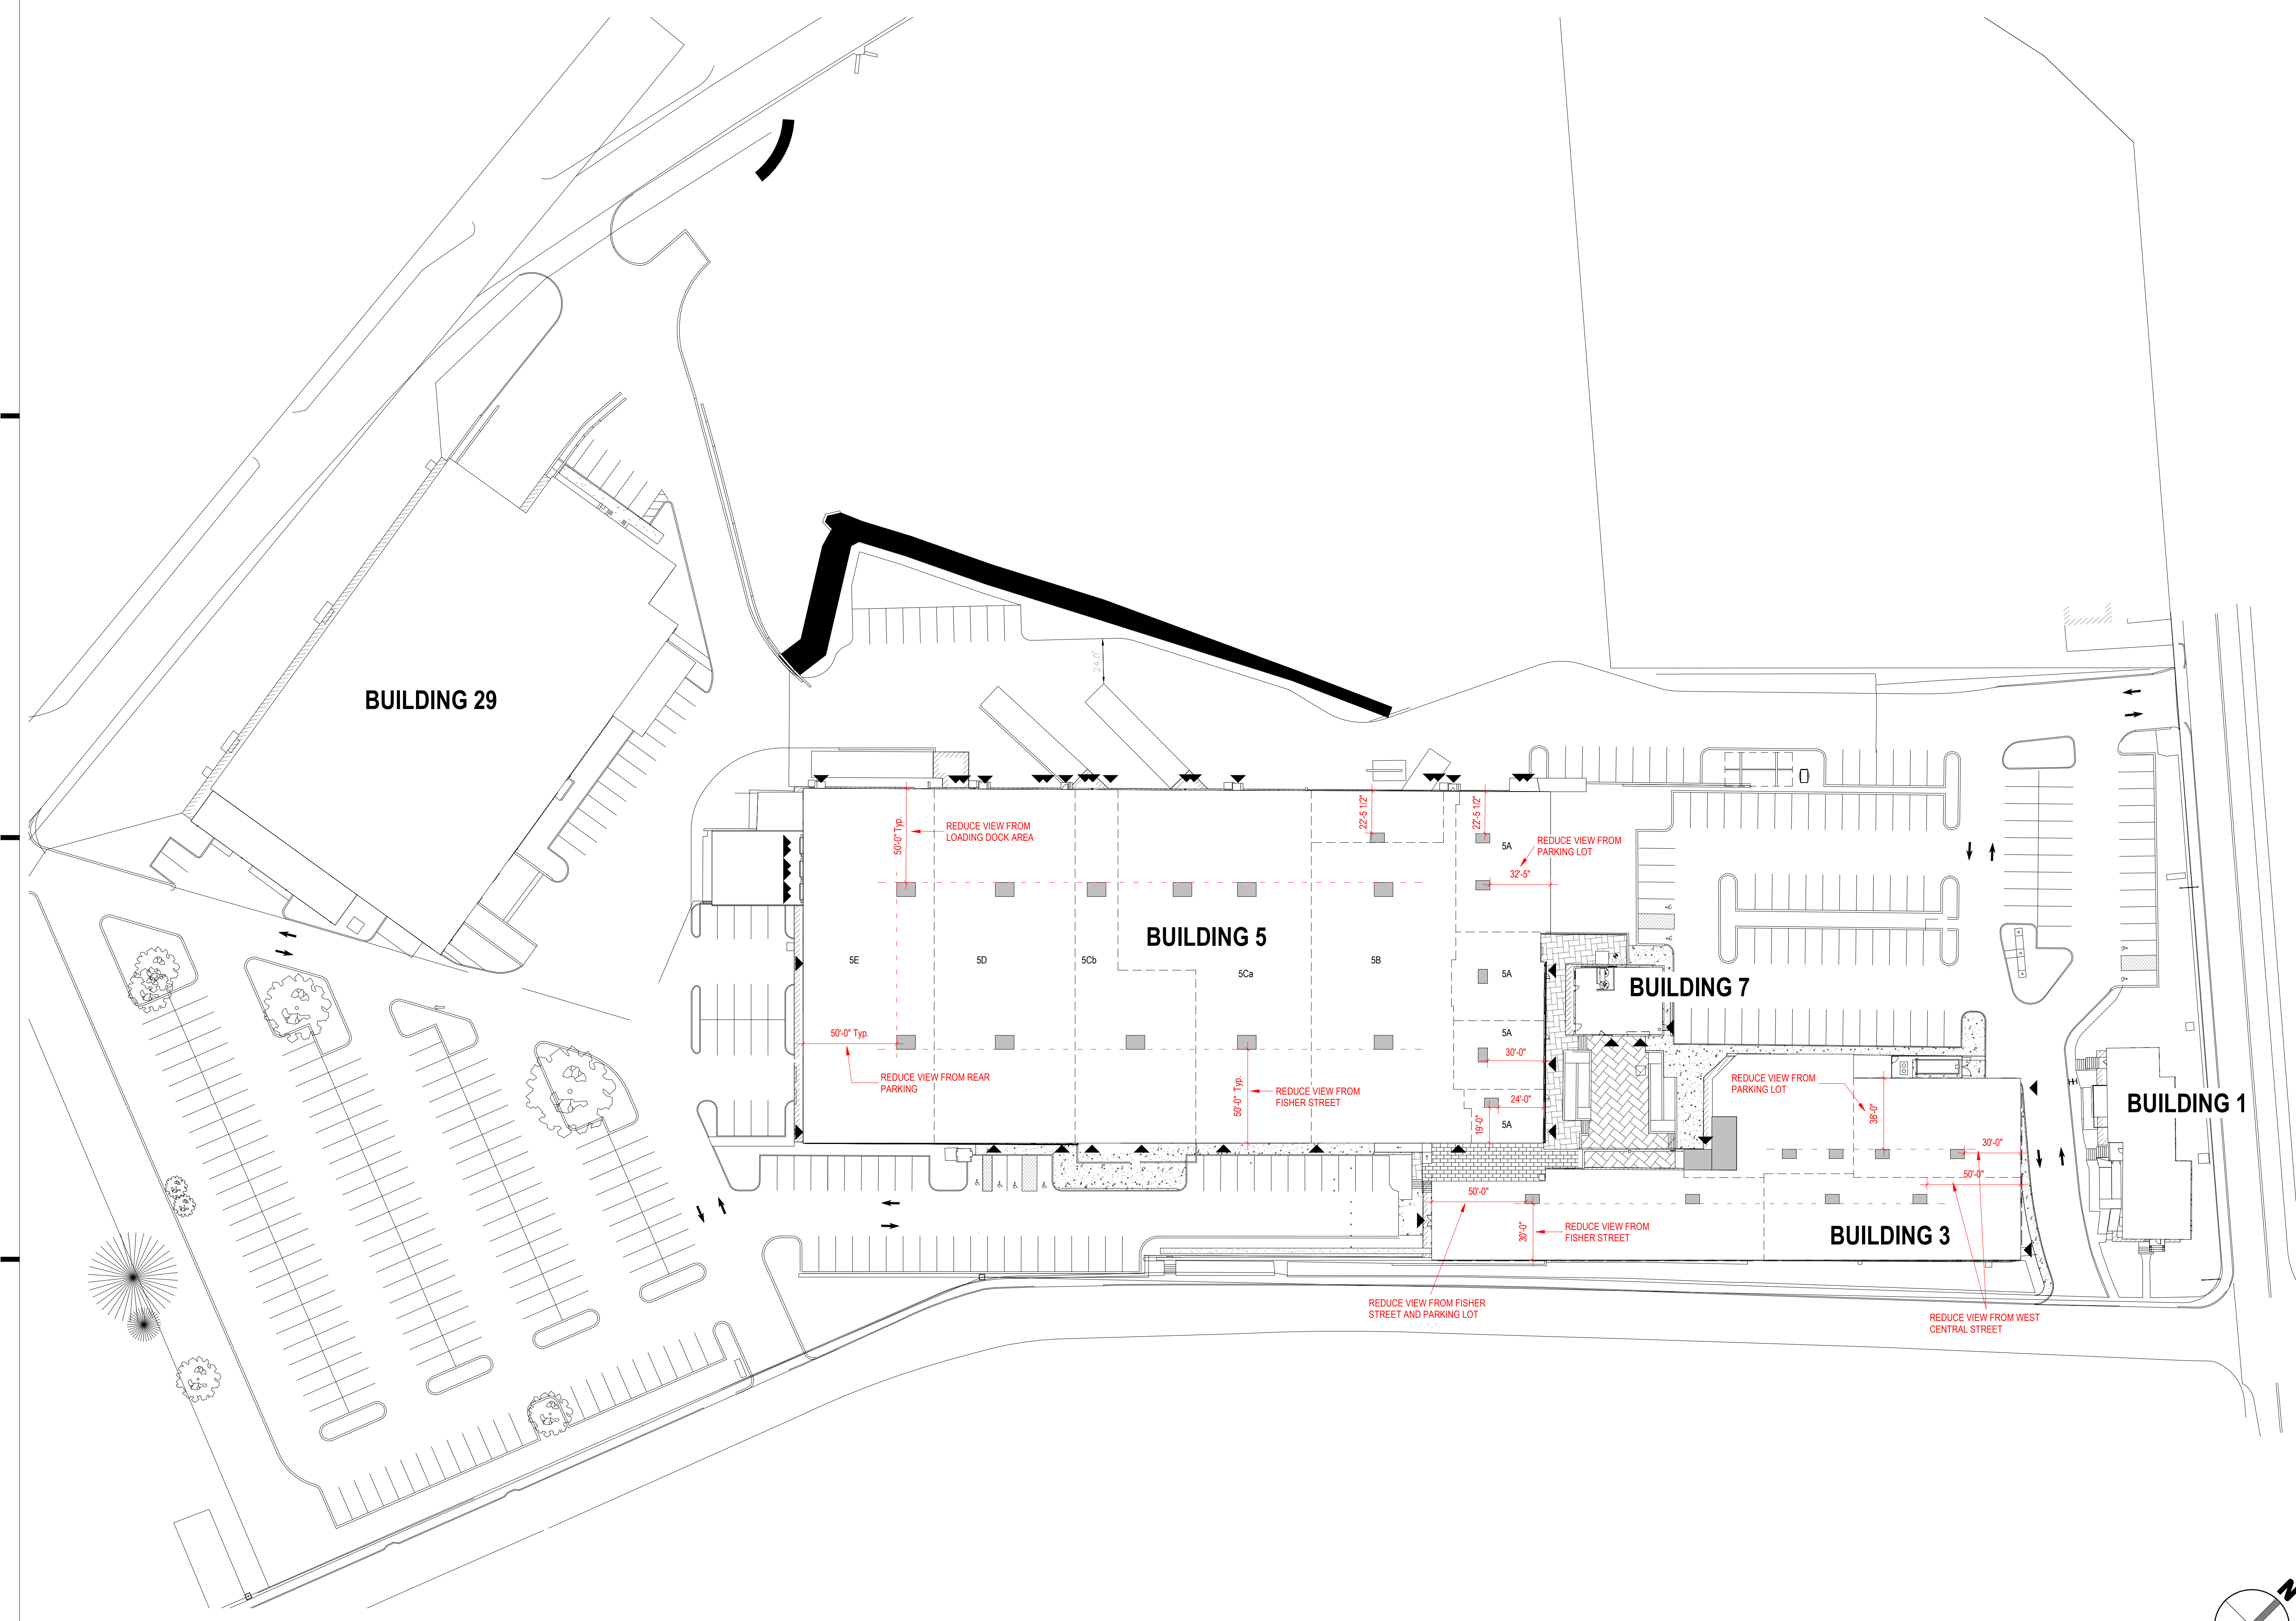

LEGEND

- ▲ Entry
- ▲▲ Loading dock entry point

For Zoning

WARNING: Joe The Architect, Inc., all drawings and written material herein constitute the original and established work of the architect, and the same may not be duplicated, used, or disclosed without the written consent of the architect. Contractors to use Architectural drawings for set out. Contractors to check and verify all Dimensions on Site prior to Construction/Fabrication. Figure Dimensions take precedence over Scaled Dimensions. Any discrepancies should be immediately referred to the Architect. The project manager shall be notified in writing of any discrepancies prior to proceeding with the work. The scale of drawings may change when copied or faxed. All work to comply with I.B.C. Regulations and relevant American Standards. © 2019- all rights reserved.

consultant / contractor information:

stamp:

revision	issuance description	date

project title:
FACTORY SQUARE FRANKLIN

5 FISHER STREET, FRANKLIN, MA 02038

client information:
K FISHER STREET LLC


1 FISHER STREET, FRANKLIN, MA 02038

J^tA
JOE THE ARCHITECT
 343 Medford Street, Suite 4C Somerville, MA 02145
 t: +1(617) 764-3593 e: askjoe@joethearchitect.com
 www.joethearchitect.com

drawing title:
PROPOSED PREFERRED
ROOF TOP UNIT (RTU)
STRATEGY

project number 261	drawing scale 1" = 40'-0"	approver Approver
drawing number A102		revision

A102

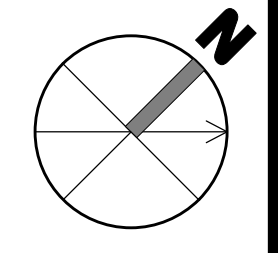

1 Architectural Illustrative Site Plan with RTUs
1" = 40'-0"